


# Fixed Displacement Radial Piston Staffa Motor HMB Series

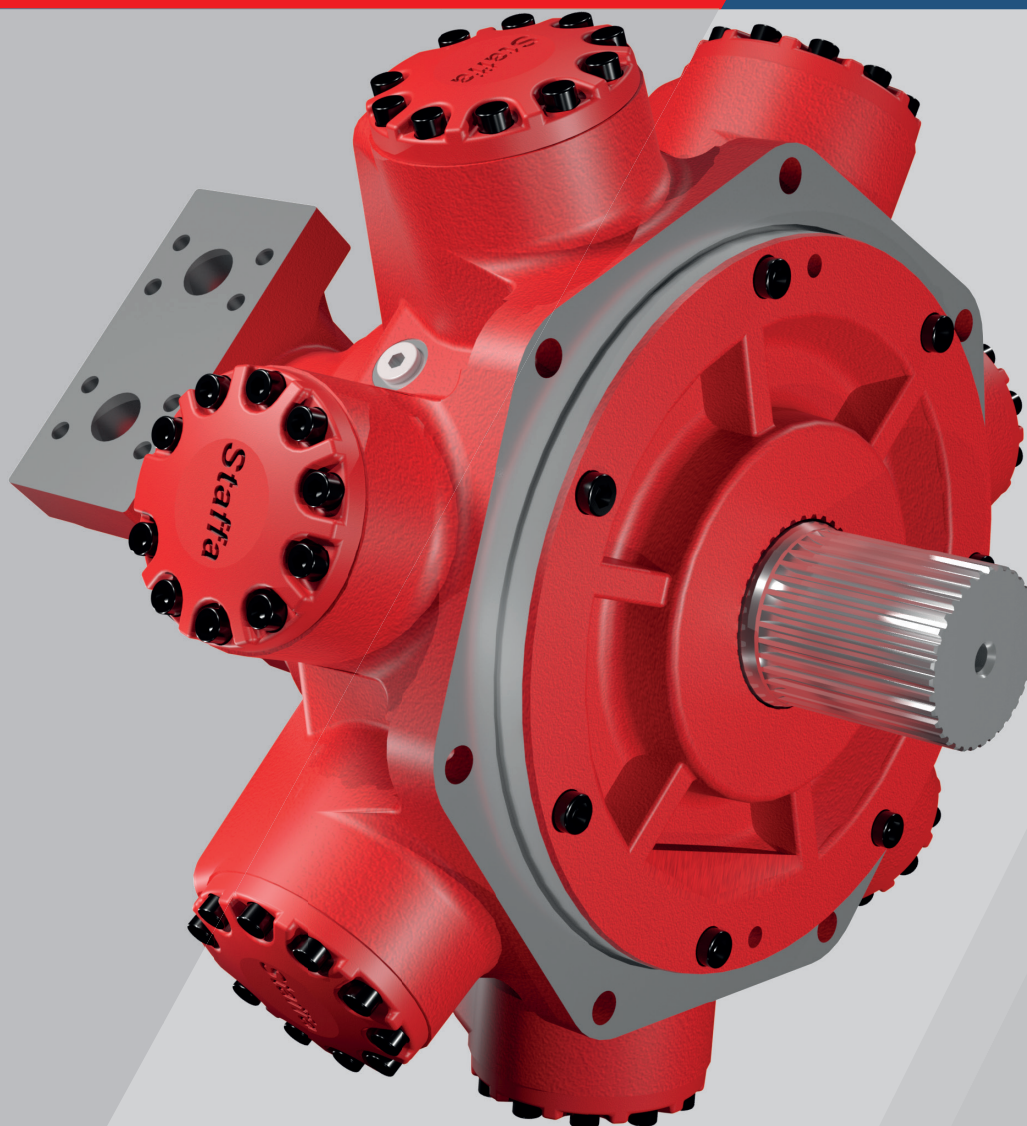

# CONTENTS

Ordering Code	4
1-1 Model Coding	4
Technical Information	6
2-1 Performance Data	6
2-2 Volumetric Efficiency Data	12
2-3 Shaft Power Calculation	13
2-4 Functional Symbols	14
2-5 Stress Limits	15
2-6 Bearing Life Notes	16
2-7 Circuit and Application Notes	17
2-8 Motor Operation at Low Temperature	20
2-9 Freewheeling Notes	21
2-10 Crankcase Drain Connections	22
2-11 Installation Data	23
2-12 Special Features	24
Dimensions	38
3-1 HMB030	38
3-1 HMB030 (cont)	39
3-1 HMB030 (cont)	40
3-2 HMB045	42
3-2 HMB045 (cont)	44
3-3 HMB060/080	45
3-4 HMB100	48
3-5 HM(HD)B125	51
3-7 HM(HD)B270	61
3-8 HM(HD)B325	66
3-9 HMHDB400	71
3-10 HMB500	73
3-11 Preferred Hydraulic Connections	75

Date	Revision	Changes
01/01/2019	MYK5849-HMB-data-sheet-A4-REV-21	Original
12/112/2024	M200112.24-HMB	<ul style="list-style-type: none"> <li>Removal of FM3 FM4 and F3 F4 Valve housing</li> <li>Replaced with SM and SFM valve housing</li> </ul>

# HMB Series

## Fixed Displacement Radial Piston Hydraulic Motor

### ■ General Descriptions


The Kawasaki Staffa range of high torque low speed fixed displacement radial piston hydraulic motors consists of 13 frame sizes ranging from the HMB030 to HMB500. Capacity ranges from 188 to 8,000 cc/rev.

The rugged, well proven design incorporates high efficiency combined with good breakout torque and smooth running capability. Various features and options are available including, on request, mountings to match competitors' interfaces.

The Kawasaki Staffa range also includes dual and triple displacement motors. To obtain details of these product ranges please refer to datasheet M-2002/03.17 and M-2005/12.17

### ■ Features

- **Rugged, reliable, proven design**
- **Unique hydrostatic balancing provides minimum wear and extended life**
- **High volumetric and mechanical efficiency**
- **Capacities range from 188 to 8,000cc/rev**
- **Large variety of shaft and porting options**
- **Output torque up to 25,250Nm**
- **Wide range of mounting interfaces available**
- **Alternative displacements also available**

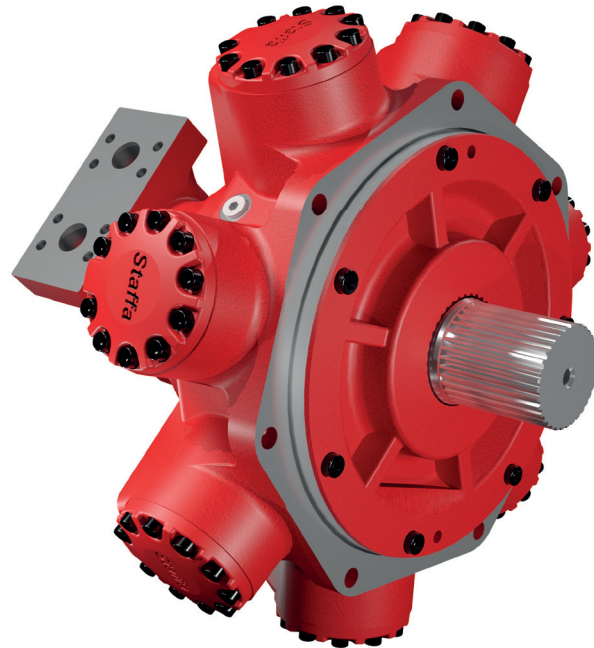

# 1

# Ordering Code

## 1-1 Model Coding

F11/HM\*B 060 / S3 V/ \*\*\* /Tj/ \*/ P\*\*\*\*\*

### Fluid Type

Blank	Mineral oil
F3	Phosphate ester (HFD fluid)
F11	Water based fluids (HFA, HFB & HFC)
Alternative fluids contact Kawasaki	

### Model Type

HMB	Standard
HMHDB	Heavy duty

\* For B400 frame size, only Heavy Duty (HMHDB) is available.

### Motor Frame Size

See options Section 2-1

### Shaft Type

See shaft type options in installation drawings

### Shaft Orientation

Blank	Horizontal and vertically down
V	Vertically Up

### Main Port Connections

See Port Connection options in section 3.11

### Special Features

p*****	Special features (see Section 2-1)
PL***	Non-catalogued features, (****) = number assigned by Kawasaki as required

### Design Series Number

Current series for HMB motors

### Tacho Encoder Drive

Blank	None
Tj*	Square wave output with directional signal*
Tk	Combines Tj with the T401 instrument to give a 4 to 20 mA output proportional to speed. Directional signal and speed relay output.

See Section 2-12  
\* Not available for frame size.

# 1-1 Model Coding

## Special Features Suffix

/ P \* \* \* \* \*

### Shaft Seal Enhancements

A	High pressure shaft seal
B	Improved shaft seal life
C	High pressure shaft seal & improved shaft seal life
0	None

See Section 2-12 for details

### External Protection

B	Marine-specification primer paint
0	None

See Section 2-12 for details

### Installation Features

A	Drain port adaptor x 1
B	Drain port adaptor x 2
C	Φ21 mm mounting holes
D	Φ22 mm mounting holes
E	Φ21 mm mounting holes & Drain port adaptor x 1
F	Φ21 mm mounting holes & Drain port adaptor x 2
G	Φ22 mm mounting holes & Drain port adaptor x 1
H	Φ22 mm mounting holes & Drain port adaptor x 2
0	None

See Section 2-11 for details

### Valve Enhancements

A	Improved cavitation resistance
B	Anti-clockwise
C	Thermal shock resistance
D	Improved cavitation resistance & anti-clockwise
E	Improved cavitation resistance & thermal shock resistance
F	Anti-clockwise & thermal shock resistance
G	Improved cavitation resistance & anti-clockwise & thermal shock resistance
0	None

See Section 2-12 for details

### Performance Enhancements

A	Increased starting torque
0	None

See Section 2-12 for details

# 2

# Technical Information

## 2-1 Performance Data

### Rating definitions

#### Continuous rating

For continuous duty the motor must be operating within each of the maximum values for speed, pressure and power.

#### Intermittent rating

Operation within the intermittent power rating (up to the maximum continuous speed) is permitted on a 15% duty basis, for periods up to 5 minutes maximum.

#### Intermittent max pressure

Intermittent max pressure: 300bar.

This pressure is allowable on the following basis:

- a) Up to 50rpm 15% duty for periods up to 5 minutes maximum.
- b) Over 50rpm 2% duty for periods up to 30 seconds maximum.

Static pressure to DNV rules 405bar (DNV-GL-RU-Ship Part 4) - except HMB030 motors.

### Limits for fire resistant fluids

Fluid Type	Continuous Pressure (bar)	Intermittent Pressure (bar)	Max Speed (rpm)	Model Type
HFA 5/95 oil-in-water emulsion	130	138	50% of limits of mineral oil	All models
HFB 60/40 water-in-oil emulsion	138	172	As for mineral oil	All models
HFC water glycol	103	138	50% of limits of mineral oil	All models
HFD Phosphate Ester	207	300	As for mineral oil	HMB030
	250	300	As for mineral oil	HMB045 to HMHDBB400 inc.
	190	227	As for mineral oil	HMB500

## 2-1 Performance Data

### Specifications

Motor Type	Geometric displacement (cc/rev)	Average actual running torque (Nm/bar)	Max. continuous speed (rpm)	Max. continuous output power (kW)	Max. continuous pressure (bar)	Max. intermittent pressure (bar)
<b>HMB030 (HMB010 replacement)</b>	188	2.30	500	18	207	250
<b>HMB030</b>	442	6.56	450	42	207	250
<b>HMB030 (FM3)</b>	492	7.31	450	52	207	250
<b>HMB045</b>	740	10.95	400	60	250	300
<b>HMB060</b>	983	14.5	300	80	250	300
<b>HMB080</b>	1,344	19.9	300	100	250	300
<b>HMB100</b>	1,639	24.3	250	110	250	293
<b>HMB125</b>	2,050	30.66	220	100	250	300
<b>HMHDB125</b>						
<b>HMB150</b>	2,470	36.95	220	115	250	300
<b>HMHDB150</b>						
<b>HMB150 (FM3)</b>	2,470	36.95	168	115	250	300
<b>HMB200</b>	3,087	46.07	175	130	250	300
<b>HMHDB200</b>						
<b>HMB200 (FM3)</b>	3,087	46.07	135	130	250	300
<b>HMB270</b>	4,310	63.79	125	140	250	300
<b>HMHDB270</b>						
<b>HMB325</b>	5,310	79.4	100	140	250	300
<b>HMHDB325</b>						
<b>HMHDB400</b>	6,800	101	120	190	250	300
<b>HMB500</b>	8,000	114	100	170	190	227


Other non standard displacements are possible - check with Kawasaki for details.

## 2-1 Performance Data (cont)


### ◆ Output Torque Curves

These torque curves indicate the maximum output torque and power of a fully run-in motor for a range of pressures and speeds when operating with zero outlet pressure on Mineral Oil of 50cSt (232 SUS) viscosity. High return line pressures will reduce torque for a given pressure differential. - x - x - x - Upper limit of continuous rating envelope.


HMB030

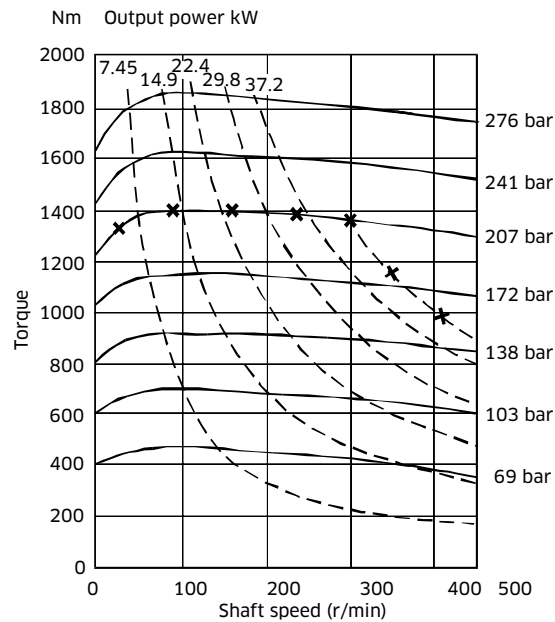

HMB030  
2-piece

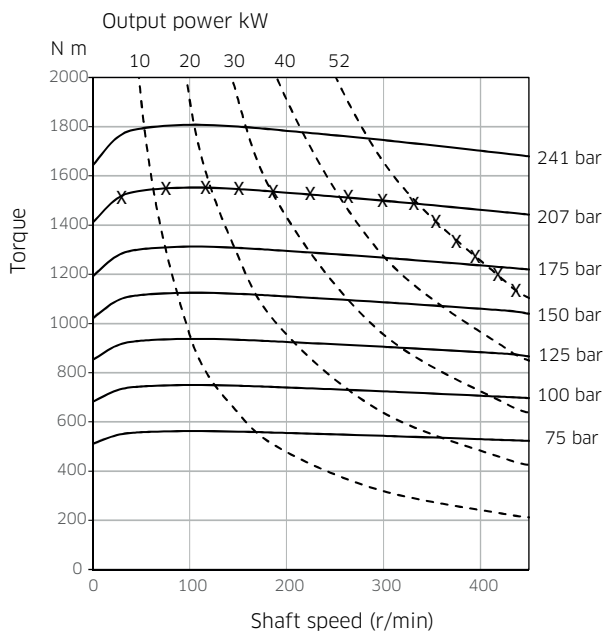





HMB045

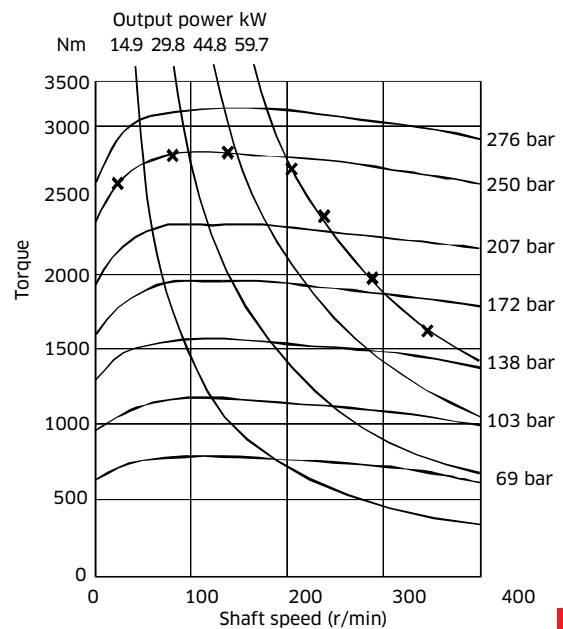







2-1 Performance Data (cont)

◆ Output Torque Curves (cont)

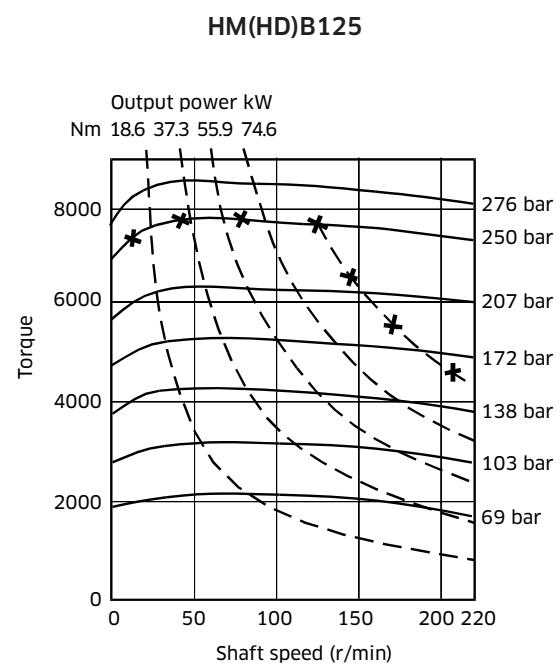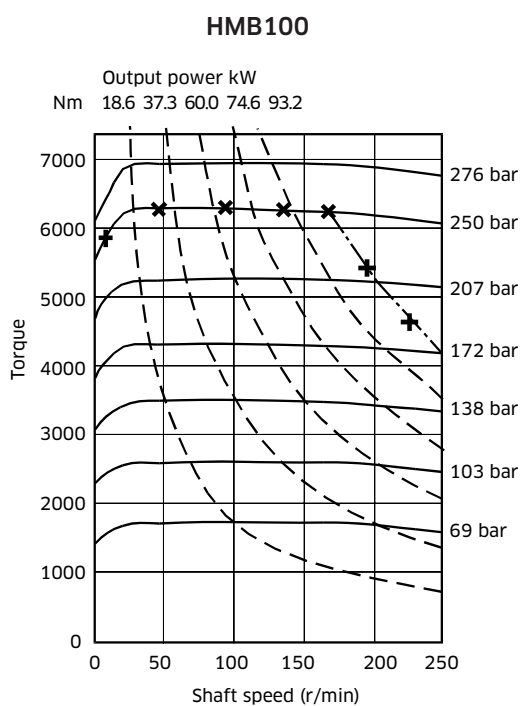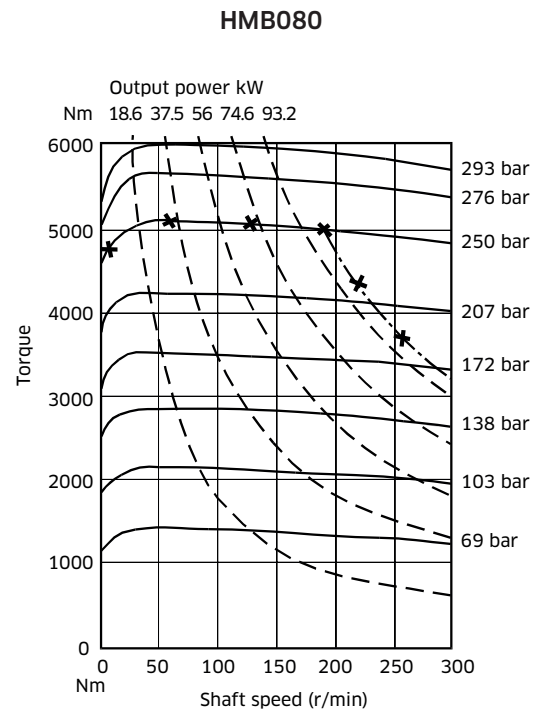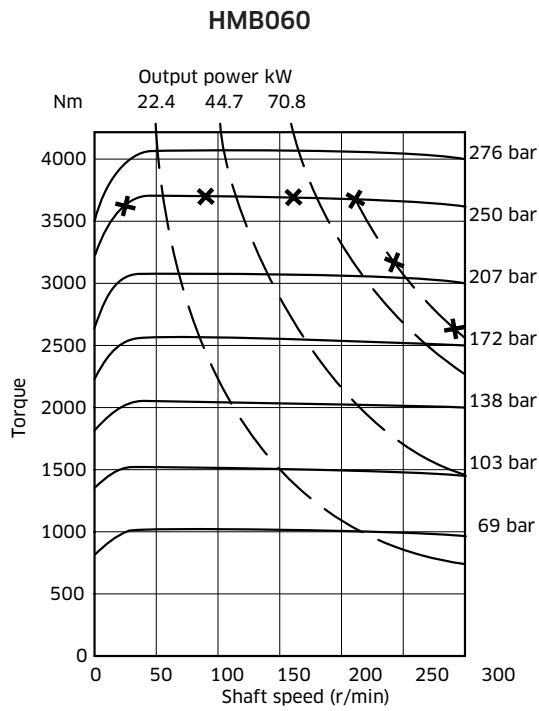



## 2-1 Performance Data (cont)

### Output Torque Curves (cont)

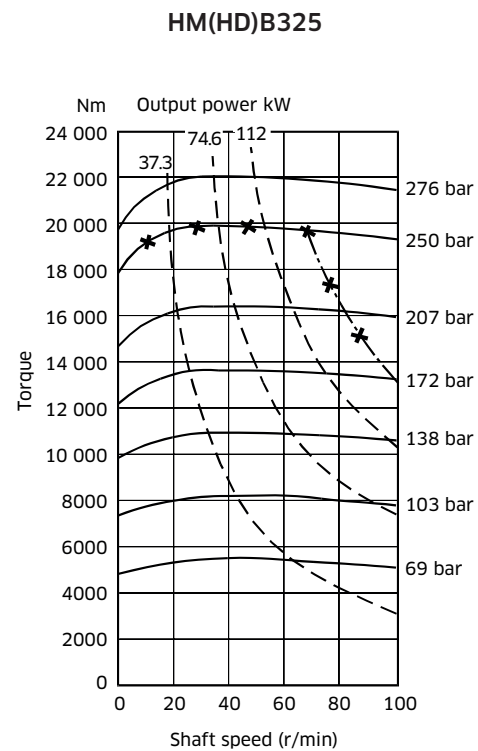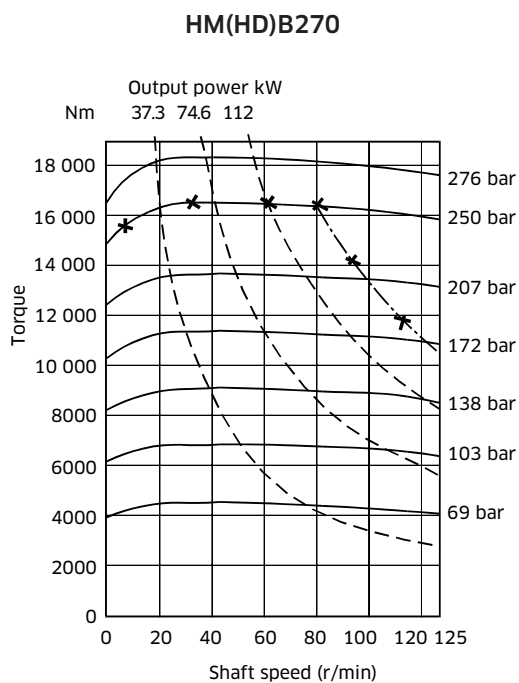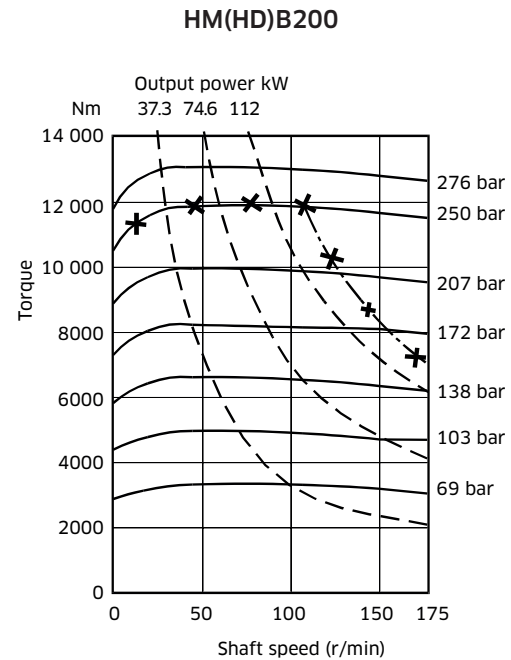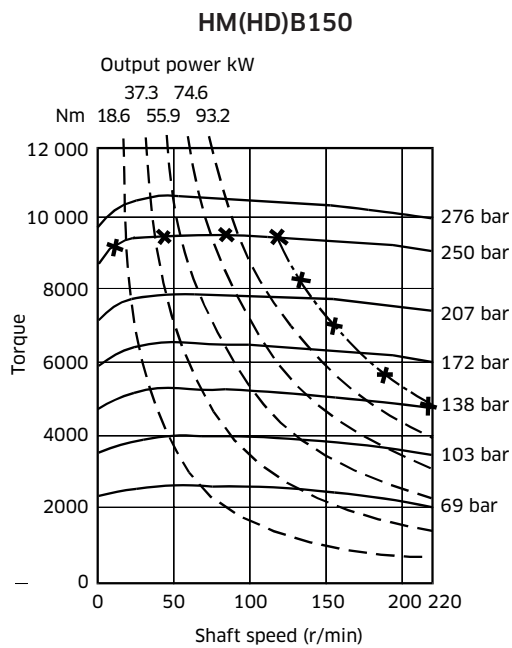

## 2-1 Performance Data (cont)

### ◆ Output Torque Curves (cont)

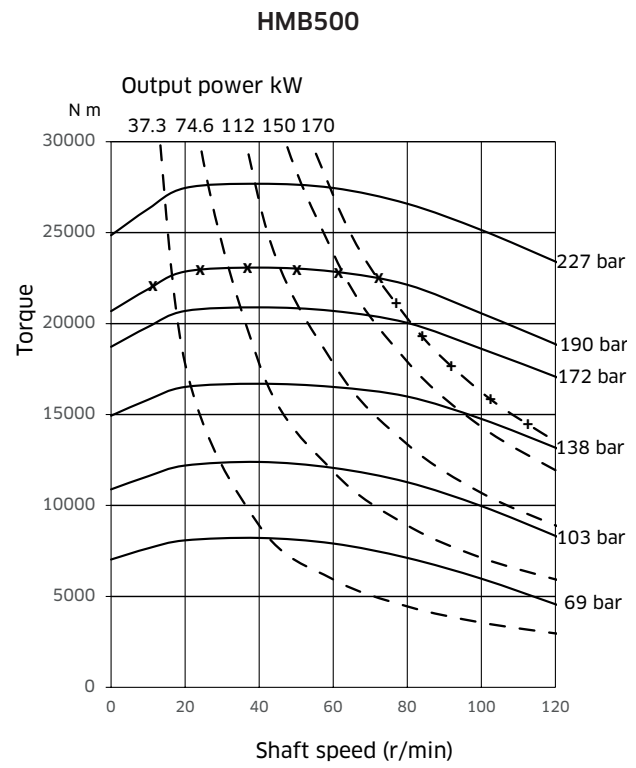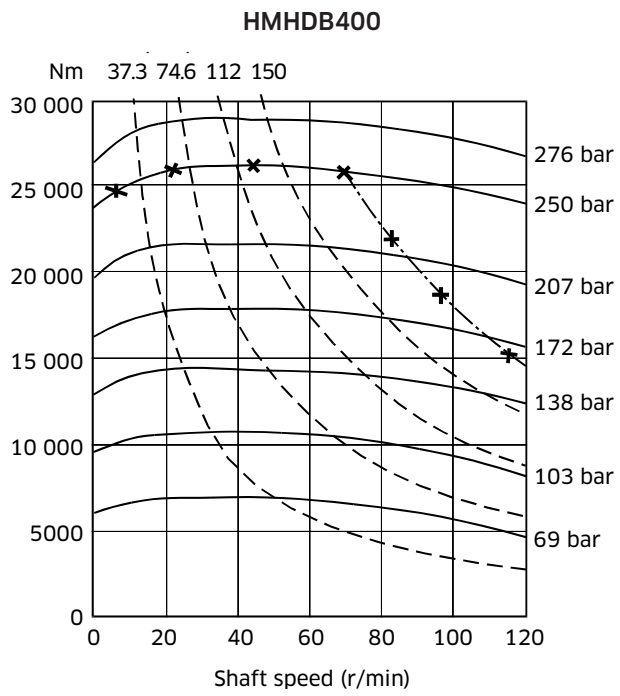

## 2-2 Volumetric Efficiency Data

Motor Type	Geometric Displacement	Zero Speed Constant	Speed Constant	Creep Speed Constant	Crankcase Leakage Constant
HMB	cc/rev	$K_1$	$K_2$	$K_3$	$K_4$
HMB030	442	1.04	57.67	2.47	0.59
2-piece HMB030	492	1.15	51.80	2.35	0.59
HMB045	740	1.92	43.36	2.71	1.76
HMB060	983	1.72	29.91	2.35	1.88
HMB080	1,344	1.71	21.62	1.84	1.84
HMB100	1,639	1.63	19.90	1.41	1.88
HM(HD)B125	2,050	2.06	11.45	1.24	1.35
HM(HD)B150	2,470	1.62	9.98	1.00	1.39
HM(HD)B200	3,087	2.53	14.99	0.78	1.39
HM(HD)B270	4,310	3.17	21.16	0.68	1.80
HM(HD)B325	5,310	3.14	18.21	0.55	1.80
HMHDB400	6,800	4.06	10.18	0.53	2.35
HMB500	8,000	9.247	78.247	1.739	5.797

Fluid Viscosity	Viscosity Factor
cSt	Kv
20	1.58
25	1.44
30	1.30
40	1.10
50	1.00
60	0.88

- Qt (total leakage)** =  $[K_1 + n/K_2] \times \Delta P \times K_v \times 0.005$  l/min  
**Creep speed** =  $K_3 \times \Delta P \times K_v \times 0.005$  rpm  
**Crankcase leakage** =  $K_4 \times \Delta P \times K_v \times 0.005$  l/min  
 **$\Delta P$**  = differential pressure bar  
**n** = speed rpm

The motor volumetric efficiency can be calculated as follows:

$$\text{Volumetric efficiency (\%)} = \left[ \frac{(\text{speed} \times \text{disp.})}{(\text{speed} \times \text{disp.}) + Q_t} \right] \times 100$$

**Example:**

HMB200 motor with displacement of 3.087 l/rev.

- Speed 60rpm  
 Differential pressure 200bar  
 Fluid viscosity 50 cSt

Total leakage =  $(K_1 + n/K_2) \times \Delta P \times K_v \times 0.005$  l/min  
 =  $(2.53 + 60/14.99) \times 200 \times 1 \times 0.005$   
 = 6.53 l/min

$$\text{Volumetric efficiency} = \left[ \frac{(60 \times 3.087)}{(60 \times 3.087) + 6.53} \right] \times 100$$

= 96.6%

## 2-3 Shaft Power Calculation

### ◆ Example

Firstly, to find the maximum differential pressure  $\Delta P$  at rated speed:

Select the rated shaft power (W) for the motor from the performance data table (in Section 2-1).

This is presented in kilowatts so must be converted to watts (x1000).

Then also take the actual average running torque in N m/bar ( $T_o$ ) and the rated shaft speed in rpm (n).

$$W = \frac{T_o \cdot \Delta P \cdot 2\pi \cdot n}{60}$$

Or to find maximum  $\Delta P$  then use:

$$\Delta P = \frac{60 \cdot W}{2\pi \cdot T_o \cdot n}$$

#### HMB270 Example:

Rated shaft power, W (W):	140,000
Average actual running torque, $T_o$ (Nm/bar):	63.79
Rated shaft speed, n (rpm):	125

$$\Delta P = \frac{60 \times 140,000}{2\pi \times 63.79 \times 125}$$

$$\Delta P = \underline{\underline{167 \text{ bar (max.)}}}$$

Secondly, to find the maximum speed at rated pressure (using the same information as before):

$$n = \frac{60 \cdot W}{2\pi \cdot T_o \cdot \Delta P}$$

Rated pressure (bar): 250

$$n = \frac{60 \times 140,000}{2\pi \times 63.79 \times 250}$$







$$n = \underline{\underline{83 \text{ rpm (max.)}}}$$

In summary, operating the motor within its shaft power limit, at rated speed, would give a maximum pressure of 167 bar, and operating the motor at rated pressure, would give a maximum speed of 83rpm.

#### Notes

- 1) The maximum calculated speed is based on a rated inlet pressure of 250bar.
- 2) The maximum shaft power is only allowable if the motor drain temperature remains below 80°C.
- 3) The maximum calculated differential pressure assumes that the low pressure motor port is less than 30bar.

## 2-4 Functional Symbols

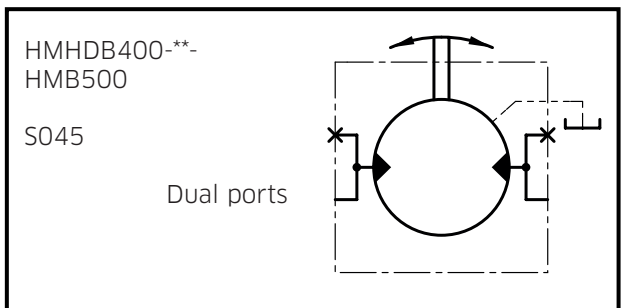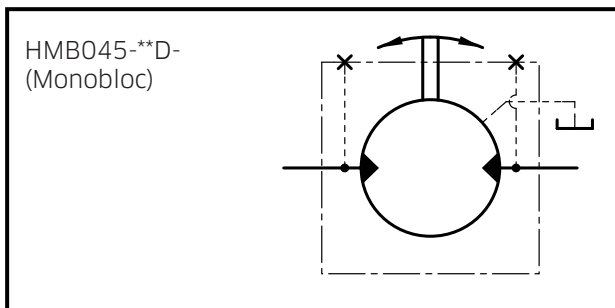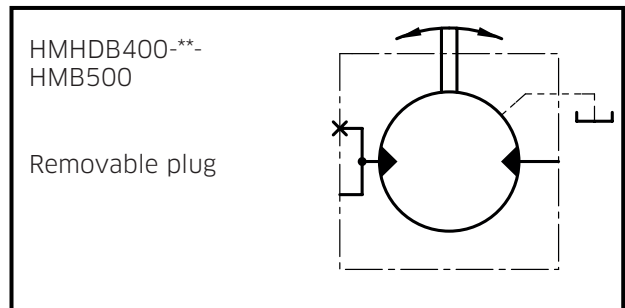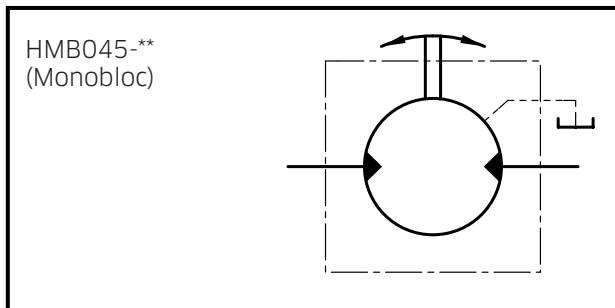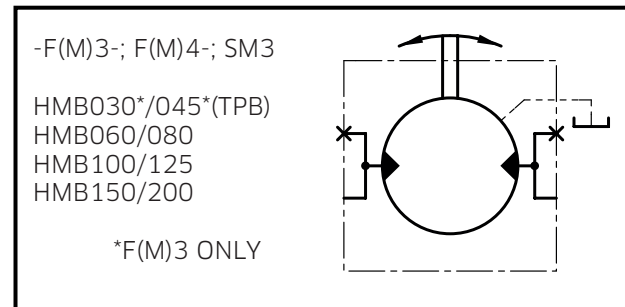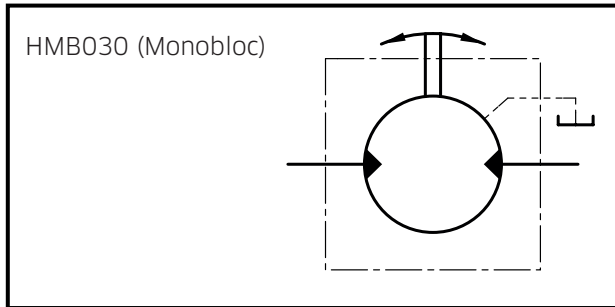

## 2-5 Stress Limits


When applying large external radial loads, consideration should also be given to motor bearing lives (see Section 2-6).

Motor Frame Size	Shaft Types	Maximum External Radial Bending Moment [Nm]
HMB030	P, S & Z	2,400
HMB045	P, S & Z	3,240
HM060, 080 & 100	P, S, Z & T	5,500
HMB125, 150 & 200	P1, S3, S4, Z3, & T	6,600
HMHDB125, 150, 200	S5, Z5 & P2	12,750
HMB270 & 325	P1, S3, Z3 & T	7,500
HMHDB270 & 325	P2, S5 & Z5	15,900
HMHDB400	P, S & Z	16,200
HMB500	P, S & Z	16,200

### Example:

Determine the maximum radial shaft load of a HMB080 motor:

Radial load offset, A = 100mm  
 Maximum radial load, W = 5,500 (see table)/100  
 = **55kN (5,607 kg)**

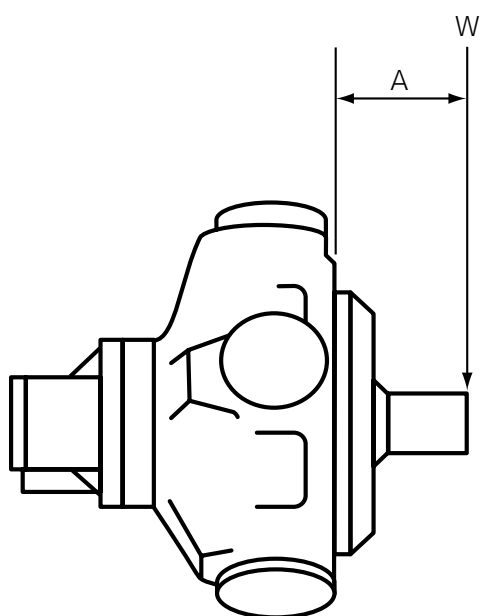

**A** = Distance from mounting face to load centre (mm)

**W** = Side load (N)

#### NOTE:

The offset distance A is assumed to be greater than 50mm.  
 Contact Kawasaki if this is not the case.

## 2-6 Bearing Life Notes

Consideration should be given to the required motor bearing life in terms of bearing service life. The factors that will determine bearing life include:

- 1) Duty cycle - time spent on and off load
- 2) Speed
- 3) Differential pressure
- 4) Fluid viscosity
- 5) External radial shaft load
- 6) External axial shaft load

**NOTE:**

A heavy duty HM(HD)B motor can be ordered to further improve bearing life. Consult Kawasaki for a detailed bearing life calculation.



## 2-7 Circuit and Application Notes

### Starting torque

The starting torques shown on the graphs in Section 2-1 are average and will vary with system parameters.

### Low Speed Operations

Minimum operating speeds are determined by the hydraulic system and load conditions (load inertia, drive elasticity, etc.) Recommended minimum speeds are shown below:

Model Type	rpm
HMB030	5
HMB045	6
HMB060/080/100	3
HM(HD)B/125/150/200	3
HM(HD)B270/325	2
HMHDB400/HMB500	2

### High Back Pressure

When both inlet and outlet ports are pressurised continuously, the lower port pressure must not exceed 70 bar at any time.

**NOTE:** High back pressure reduces the effective torque output of the motor.

### Boost Pressure

When operating as a motor the outlet pressure should equal or exceed the crankcase pressure. If pumping occurs (i.e. overrunning loads) then a positive pressure, "P", is required at the motor ports. Calculate "P" (bar) from the operating formula Boost Formula  $P = 1 + \frac{N^2 \times V^2}{K} + C$

Where P is in bar, N = motor speed (rpm), V = motor displacement (cc/rev), C = crankcase pressure (bar) and K=a constant from the table below:

Motor	Porting	Constant (K)
HMB030	Standard - Monobloc	$3.7 \times 10^9$
	F(M)3 SM3	$7.5 \times 10^9$
HMB045	Standard - Monobloc	$1.3 \times 10^{10}$
	F(M)3 SM3	$1.6 \times 10^{10}$
HMB060, HMB080 & HMB100	F(M)3 SM3	$1.8 \times 10^{10}$
HM(HD)B125, HM(HD)B150 & HM(HD)B200	FM(3) SM3	$4.0 \times 10^{10}$
	FM(4)	$8.0 \times 10^{10}$
HM(HD)B270 & HM(HD)B325	FM(4)	$7.2 \times 10^{10}$
HMHDB400 & HMB500	SO4 SO45	$7.2 \times 10^{10}$

## 2-7 Circuit and Application Notes (cont)

The flow rate of oil needed for the make-up system can be estimated from the crankcase leakage data (see Section 2-1 for calculation method). Allowances should be made for other system losses and also for “fair wear and tear” during the life of the motor, pump and system components.

### Cooling Flow

Operating within the continuous rating does not require any additional cooling.

For operating conditions above “continuous”, up to the “intermittent” rating, additional cooling oil may be required. This can be introduced through the spare crankcase drain ports.

Consult Kawasaki about such applications.

### Motorcase pressure

With the standard shaft seal fitted, the motor casing pressure should not exceed 3.5bar.

#### NOTES

- 1) The casing pressure at all times must not exceed either the motor inlet or outlet pressure.
- 2) High pressure shaft seals are available for casing pressures of:  
10bar for all remaining frame sizes.
- 3) Check installation dimensions for maximum crankcase drain fitting depth.



**CAUTION** For trouble free operation the motor's crankcase pressure must always be lower than both of the motor port pressures:

$$P_{\text{case}} < P_{\text{in}} \quad \text{and} \quad P_{\text{case}} < P_{\text{out}}$$

### Hydraulic Fluids

Dependent on motor (see model code fluid type - Section 1-1) suitable fluids include:

- a) Antiwear hydraulic oils
- b) Phosphate ester (HFD fluids)
- c) Water glycols (HFC fluids)
- d) 60/40% water-in-oil emulsions (HFB fluids)
- e) 5/95% oil-in-water emulsions (HFA fluids)
- f) Antiwear environmentally acceptable lubricants (EALs)

Some fluids require a reduction in pressure and speed limits. Please see table in Section 1-1.

Viscosity limits when using any fluid except oil-in-water (5/95) emulsions are:

<b>Max. off load:</b>	<b>2,000cSt</b> (9270 SUS)
<b>Max. on load:</b>	<b>150cSt</b> (695 SUS)
<b>Optimum:</b>	<b>50cSt</b> (232 SUS)
<b>Minimum:</b>	<b>25cSt</b> (119 SUS)

### Temperature limits

**Ambient min.** -30°C (-22°F)

**Ambient max.** +70°C (158°F)

Max. operating temperature range.

<b>Mineral oil</b>	<b>Water containing</b>
<b>Min</b> -20°C (-4°F)	+10°C (50°F)
<b>Max.</b> +80°C (175°F)	+54°C (130°F)

**NOTE:** To obtain optimum services life from both fluid and hydraulic systems components, a fluid operating temperature of 40°C is recommended.

## 2-7 Circuit and Application Notes (cont)

### ◆ Mineral oil recommendations

The fluid should be a good hydraulic grade, non-detergent mineral oil. It should contain anti-oxidant, antifoam and demulsifying additives. It must contain antiwear or extreme pressure (EP) additives. Automatic transmission fluids and motor oils are not recommended.

### ◆ Biodegradable Fluid Recommendations

Well-designed environmentally acceptable lubricants (EALs) may be used with Staffa motors. The EAL must be designed for use in hydraulic systems and have a synthetic ester base. Additives should be as listed for mineral oils, above. The performance of EALs with hydraulic systems vary widely and so checks for seal compatibility, copper alloy compatibility, oxidation resistance and lubrication properties should be carried out before selecting an EAL. For help with EALs please contact Kawasaki.

### ◆ Filtration

Full flow filtration (open circuit), or full boost flow filtration (closed circuit) to ensure system cleanliness to ISO4406 code 22/18/13 or cleaner.

### ◆ Noise levels

The airborne noise level is less than 66.7dB(A) DIN & dB(A) NFPA through the continuous operating envelope. Where noise is a critical factor, installation resonances can be reduced by isolating the motor by elastomeric means from the structure and the return line installation. Potential return line resonances originating from liquid borne noise can be further attenuated by providing a return line back pressure of 2 to 5bar.

### ◆ Polar moment of inertia and mass table

Motor Frame Size	Polar Moment of Inertia (kg m <sup>2</sup> ) (Typical data)	Mass (kg) (Approx. all models)
HMB030	0.0150	73
HMB045	0.0470	120
HMB060	0.0500	144
HMB080	0.0600	144
HMB100	0.0760	144
HMB125	0.2200	217
HMB150	0.2500	265
HMB200	0.2700	265
HMB270	0.4900	420
HMB325	0.5000	429
HMHDB400 - S04	0.5400	481
HMHDB400 - S045	0.5400	510
HMB500	0.5400	510

## 2-8 Motor Operation at Low Temperature

When operating the motor at low temperature consideration should be given to the fluid viscosity. The maximum fluid viscosity before the shaft should be turned is 2,000cSt. The maximum fluid viscosity before load is applied to the motor shaft is 150cSt.

If low ambient temperature conditions exist, then a crankcase flushing flow of at least 5 l/min should be applied to the motor during periods when the motor is not in use.

The shaft seal temperature limits for both medium and high pressure applications are shown in the table below.

	Non-operating temperature limits	Minimum operating temperature
Standard pressure shaft seal	below minus 40°C and above 100°C	minus 30°C
High pressure shaft seal	below minus 30°C and above 120°C	minus 15°C

All seals are very brittle below minus 40°C and are likely to break very easily and due to their sluggish response may not provide a 100% leak free condition.

It should be noted that the maximum continuous operating temperature within the motor crankcase is plus 80°C.

## 2-9 Freewheeling Notes

All Staffa motors can be used in freewheeling applications.

In all circumstances it is essential that the motor is unloaded (A and B ports connected together) and that the circuit is boosted.

The required boost pressure is dependent on both the speed and displacement conditions.

It should be noted that for HMB series motors, to achieve freewheel, large flows will have to re-circulate around the motor.

This will require a large recirculating valve and consideration of circuit cooling as the motor will be generating a braking torque.


It is for these reasons that HMC, HPC or HMF series motors are the preferred option for freewheeling applications.

See catalogues M-2002/03.17, M-2003/03.17 and M-2005/12.17 for details.

## 2-10 Crankcase Drain Connections


### ◆ Motor axis - horizontal

The recommended minimum pipe size for drain line lengths up to approx. 5m is 12.0mm (½") bore. Longer drain lines should have their bore size increased to keep the crankcase pressure within limits.

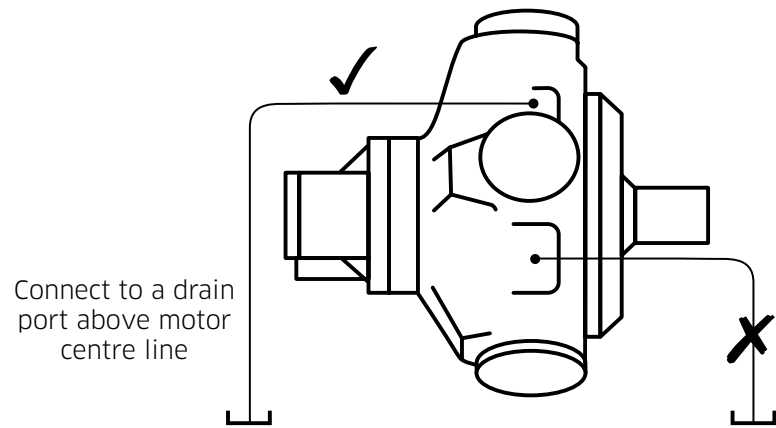


### ◆ Motor axis - vertical shaft up

Specify "V" within the model code for extra drain port, G¼" (BSPF). Connect this port into the main drain line downstream of a 0.35bar check valve to ensure good bearing lubrication. The piping arrangement must not allow syphoning from the motorcase. (refer to installation drawing for details).

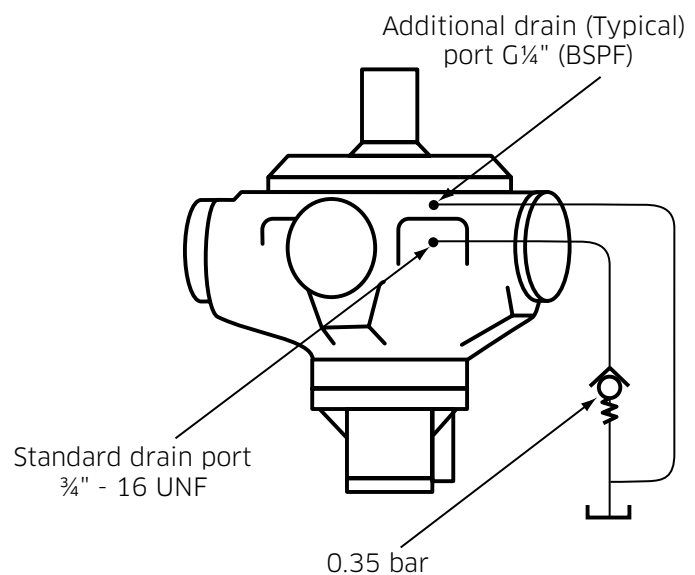

### ◆ Motor axis - vertical shaft down

The piping, from any drain port, must be taken above the level of the motorcase to ensure good bearing lubrication. The arrangement must not allow syphoning from the motorcase.

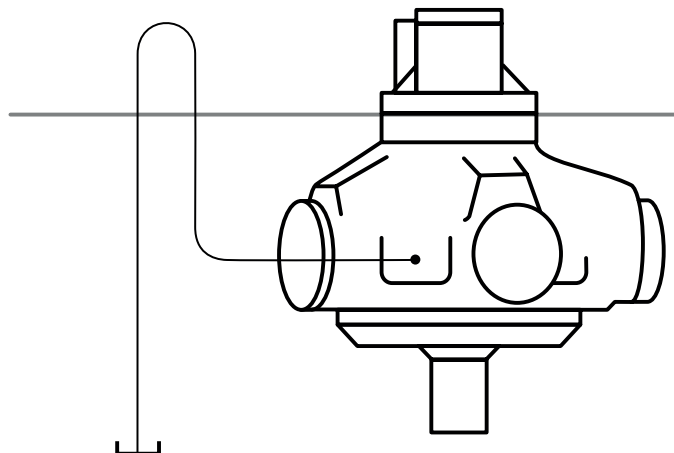

## 2-11 Installation Data

### ◆ Spigot

The motor should be located by the mounting spigot on a flat, robust surface using correctly sized bolts.

The diametrical clearance between the motor spigot and the mounting must not exceed 0.15mm. If the application incurs shock loading, frequent reversing or high speed running, then high tensile bolts should be used, including one fitted bolt.

### ◆ Bolt Torque

The recommended torque wrench setting for bolts is as follows:

<b>M12</b>	97 +/- 7Nm
<b>M14</b>	160 +/- 21Nm
<b>M18</b>	312 +/- 14 Nm
<b>M20</b>	407 +/- 14 Nm
<b>M24</b>	690 +/- 27 Nm
<b>½" UNF</b>	97 +/- 7 Nm
<b>⅝" UNF</b>	265 +/- 14 Nm
<b>¾" UNF</b>	393 +/- 14 Nm
<b>1"</b>	810 +/- 27 Nm

### ◆ Shaft Coupling

Where the motor is solidly coupled to a shaft having independent bearings the shaft must be aligned to within 0.13mm TIR.

### ◆ End of Motor Life

The motor unit must be completely empty upon disposal. It must be disposed of according to national regulations and safety information for the disposal of hydraulic fluids

All individual parts of the motor unit must be recycled. Separate the motor unit parts according to: cast iron, steel, aluminium, non-ferrous metal, electronic waste, plastic, and seals.

## 2-12 Special Features

Feature	Section	HMB 030	HMB 030 -F(M)3 HMB 030 -SM3	HMB 045	HMB 045 -F(M)3 HMB 045 -SM3	HMB 060/080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
High Pressure Shaft Seal	2-12	●	●	●	●	●	●	●	●	●	●	●	●
Improved Shaft Seal Life	2-12	●	●	●	●	●	●	●	●	●	●	●	●
Improved Cavitation Resistance	2-12	○	●	○	●	●	●	●	●	●	●	●	●
Increased Starting Torque	2-12	●	●	●	●	●	●	●	●	●	●	●	○
Anti-clockwise Rotation	2-12	●	●	●	●	●	●	●	●	●	●	●	●
Thermal Shock Resistance	2-12	○	●	○	●	●	●	●	●	●	●	●	○
Drain Port Adaptor - ½" BSPP	2-12	●	●	●	●	●	●	●	●	●	●	●	●
Φ21mm Mounting Holes	2-12	○	○	○	○	●	●	●	●	●	●	●	●
Φ22mm Mounting Holes	2-12	○	○	○	○	●	●	●	●	●	●	●	●
Marine-specification Primer Paint	2-12	●	●	●	●	●	●	●	●	●	●	●	●


- Available
- Not available

If a motor is to be ordered with any special features listed, please contact Kawasaki.



## 2-12 Special Features (cont)

### ◆ High Pressure Shaft Seal

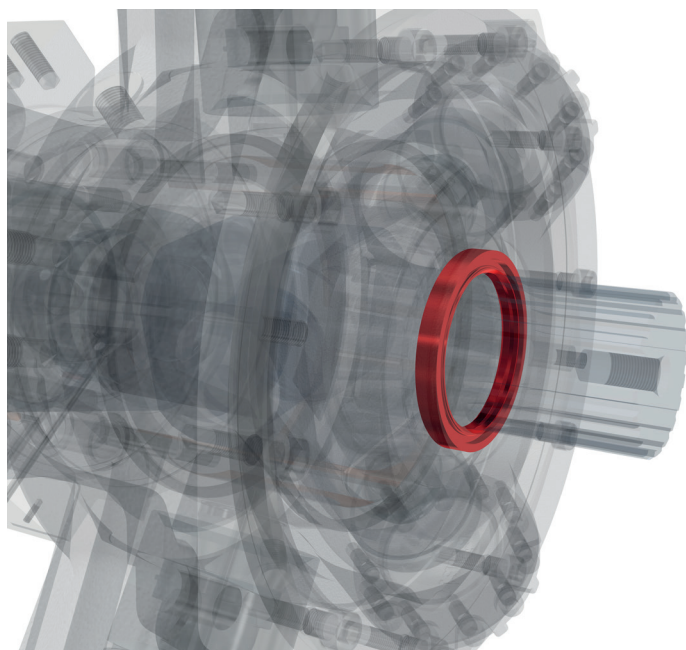

#### Description:

- > 10bar rated
- > Recommended for cold climates
- > Rugged aluminium construction

#### Technical Information

Where crankcase pressure will be higher than 3.5 bar, the high pressure shaft seal should be selected.

Case pressure	≤ 10bar
Non-operating temperature limits	Below -30°C and above 120°C
Minimum operating temperature	-15°C
Maximum operating temperature	80°C
Minimum viscosity	2,000cSt
Maximum viscosity	150cSt


#### Applicable to:

HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
●	●	●	●	●	●	●	●	●	●	●	●

Please contact Kawasaki to order this feature.

## 2-12 Special Features (cont)

### ◆ Improved Shaft Seal Life

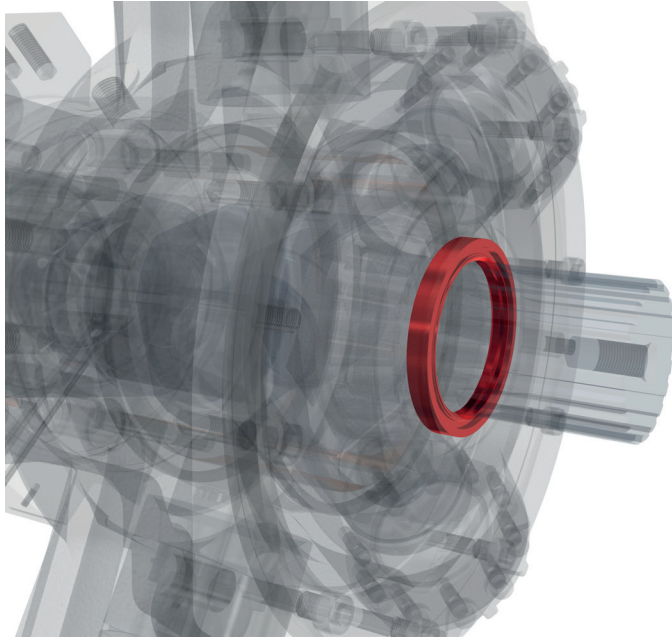

#### Description:

- > Stainless steel sleeve prevents corrosion
- > Improved wear resistance
- > Recommended for corrosive environments

#### Technical Information

A well-established method of increasing rotary seal life in corrosive environments is to fit a thin-walled, stainless steel sleeve to the rotating shaft to provide a corrosion-resistant, wear-resistant counterface surface for the seal to run against. All HMB motors can be fitted with such sleeves upon request.

Sleeve material	A304/301 Stainless Steel
Sleeve surface finish	R <sub>a</sub> 0.25 to 0.5μm (10 to 20μin)

#### Applicable to:

HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
●	●	●	●	●	●	●	●	●	●	●	●


Please contact Kawasaki to order this feature.

## 2-12 Special Features (cont)

### ◆ Improved Cavitation Resistance

#### Description:

- > Recommended for overrunning applications
- > Protects against seal damage for short periods of operation in vacuum inlet conditions.

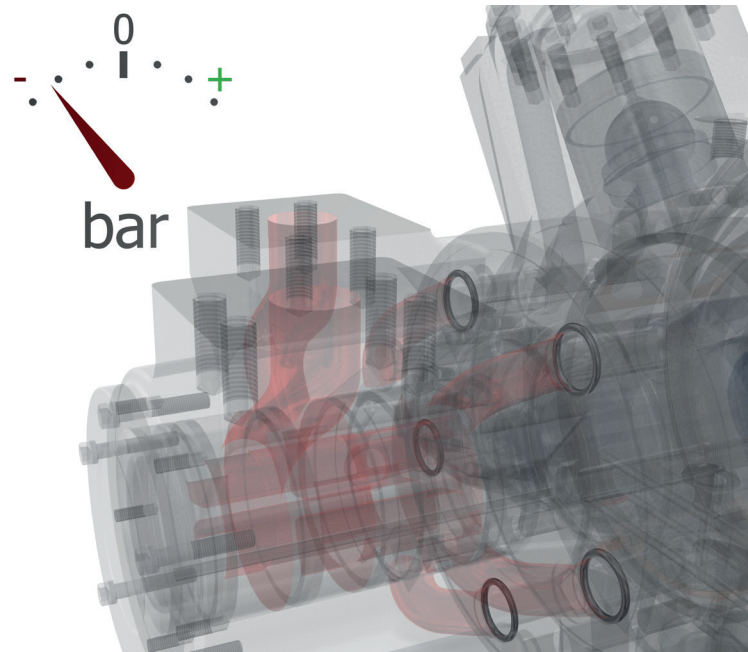

Cavitation can occur due to many different factors. Although it is not possible to make the HMB motor resistant to cavitation, certain features can be added to improve the motor's resistance to short periods of lost port pressure.

In applications where the HMB motor can be driven (like a pump) a risk arises that insufficient fluid will be provided to maintain a positive pressure at both main ports of the motor causing cavitation. The results of extended running at these conditions can be catastrophic to the motor's function.

The improved cavitation resistance feature should be considered where:

- Overrunning conditions may occur (load driving the motor)
- Loss of main port pressure while motor is rotating

#### NOTE:

This feature comes as standard on monobloc HMB motors (HMB030, HMB045).

#### Applicable to:

HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
○	○	○	●	●	●	●	●	●	●	●	●


Please contact Kawasaki to order this feature.

## 2-12 Special Features (cont)

### ◆ Increased Starting Torque

#### Description:

- > Optimised for high break-out torque
- > Recommended for low speed operation
- > Improved service life for low speed applications

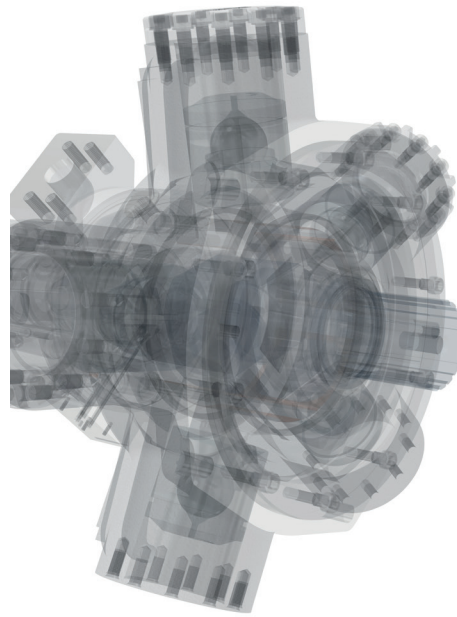


#### Technical Information

If an application demands the drive motor be run at speeds of less than 10 rpm for most of the duty cycle, or involves frequent start/stop or forward/reverse operation, the Staffa HMB motor range has it covered.

By optimising the HMB motor's design for low speeds, it is possible to increase the break out torque and low speed mechanical efficiency performance.

All figures given in Section 2-1 Performance Data are still valid when selecting this feature.

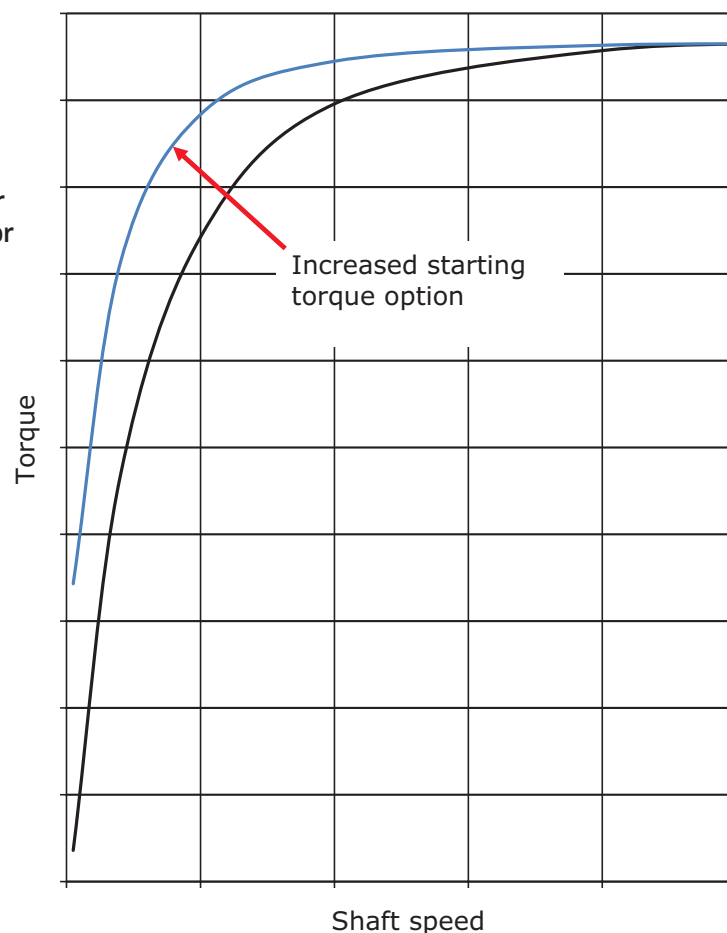

## 2-12 Special Features (cont)

### ◆ Increased Starting Torque (cont)

#### Volumetric Performance

In order to achieve increased torque at low speeds the volumetric characteristics of the motor performance are changed.

When calculating leakage and volumetric efficiency use the constants shown here in place of those given for the standard motor in Section 2-1.

Motor Type	Geometric Displacement	Zero Speed Constant	Speed Constant	Creep Speed Constant	Crankcase Leakage Constant
	cc/rev	K1	K2	K3	K4
HMB030	442	8.62	51.80	17.54	8.06
HMB030 2-piece	492	8.51	57.67	19.37	8.06
HMB045	740	3.93	43.36	12.80	9.23
HMB060	983	9.19	29.91	9.95	9.35
HMB080	1,344	9.18	21.62	7.39	9.31
HMB100	1,639	9.10	19.90	5.97	9.35
HM(HD)B125	2,050	9.53	11.45	4.88	8.82
HM(HD)B150	2,470	9.09	9.98	4.02	8.86
HM(HD)B200	3,087	10.00	14.99	3.20	8.86
HM(HD)B270	4,310	13.63	21.16	3.11	12.26
HM(HD)B325	5,310	13.60	18.21	2.52	12.26
HMHDB400	6,800	19.00	10.18	2.73	17.29

#### Applicable to:

HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
●	●	●	●	●	●	●	●	●	●	●	○


Please contact Kawasaki to order this feature.

## 2-12 Special Features (cont)

### ◆ Anti-Clockwise Rotation


#### Description:

- > Reduce installation complexity
- > Standardise equipment designs

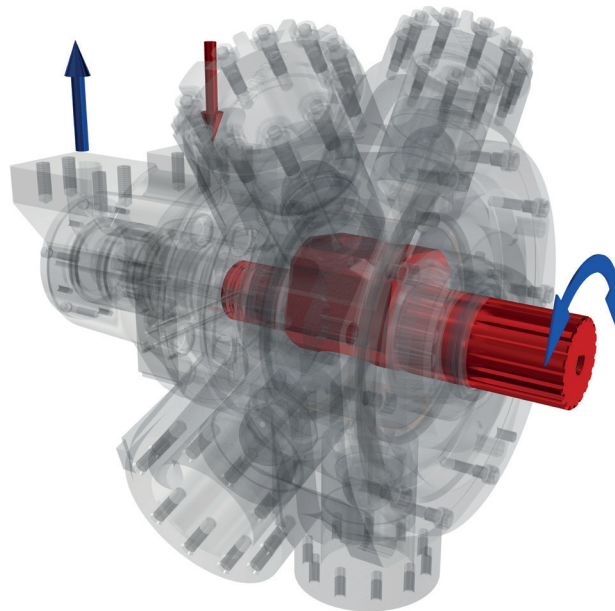

#### Technical Information

All HMB motors can be specified with an anti-clockwise rotation valve configuration. All performance and volumetric characteristics remain unchanged.

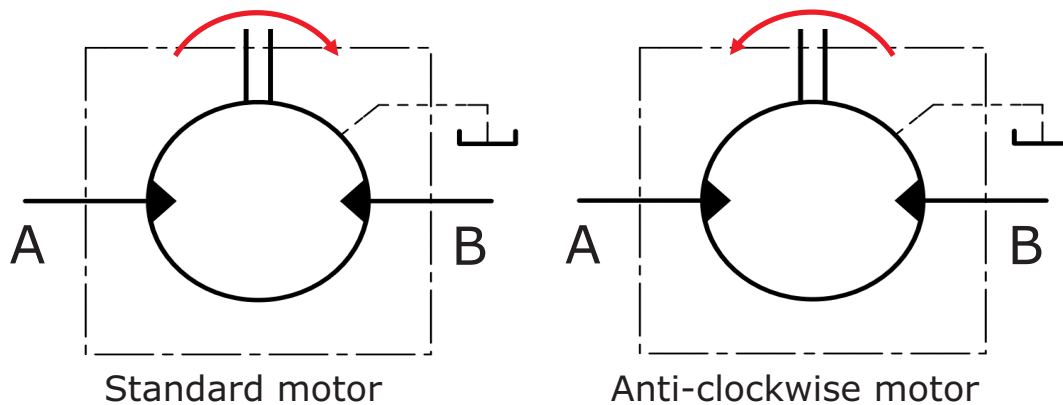


#### Applicable to:

HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HM(HD)B 400	HMB 500
●	●	●	●	●	●	●	●	●	●	●	●

Please contact Kawasaki to order this feature.

## 2-12 Special Features (cont)

### ◆ Thermal Shock Resistance

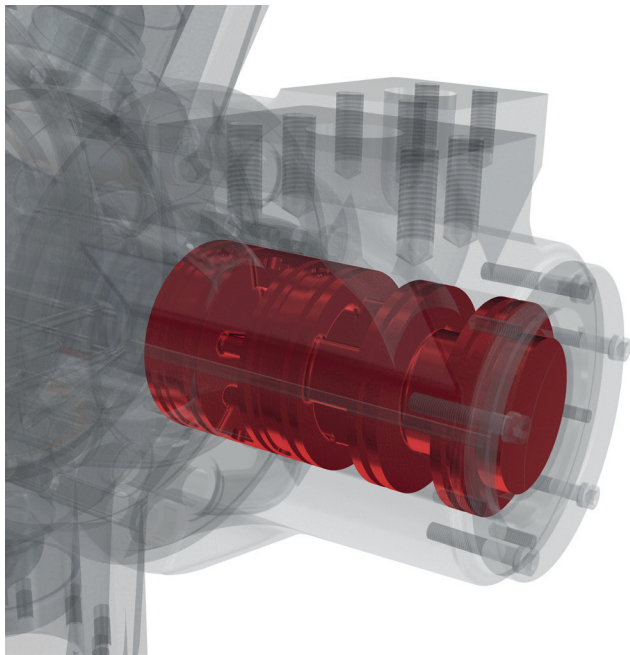

#### Description:

- > Recommended for cold climates
- > Optimised for start-up in freezing temperatures
- > Engineered for total peace of mind

#### Technical Information

Starting up a cold system with warm hydraulic fluid is a known cause of heavy wear and potential seizure of hydraulic machinery. To minimise this potential risk, the HMB motor can be configured to combat thermal shocks to give complete peace of mind when operating in very cold climates.

#### Volumetric Performance

In order to provide thermal shock resistance the volumetric characteristics of the motor performance are changed. When calculating leakage and volumetric efficiency use the constants shown in Section 2-12 in place of those given for the standard motor in Section 2-1.

All figures given in Section 2-1 Performance Data are still valid when selecting this feature.

#### Note:

When operating at low temperature, consideration must be given to the guidance notes in Section 2-8 Motor Operation at Low Temperature.

## 2-12 Special Features (cont)

### ◆ Thermal Shock Resistance (cont)

Motor Type	Geometric Displacement	Zero Speed Constant	Speed Constant	Creep Speed Constant	Crankcase Leakage Constant
	cc/rev	K1	K2	K3	K4
HMB060	983	3.72	29.91	4.39	1.88
HMB080	1,344	3.71	21.62	3.32	1.84
HMB100	1,600	3.63	19.90	2.63	1.88
HM(HD)B125	2,050	4.41	11.45	2.21	1.35
HM(HD)B150	2,470	3.97	9.98	1.81	1.39
HM(HD)B200	3,087	4.88	14.99	1.43	1.39
HM(HD)B270	4,310	5.52	21.16	1.23	1.80
HM(HD)B325	5,310	5.49	18.21	0.99	1.80
HMHDB400	6,800	6.41	10.18	0.88	2.35

### Applicable to:

HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
○	○	○	●	●	●	●	●	●	●	●	○

Please contact Kawasaki to order this feature.




## 2-12 Special Features (cont)

### ◆ Drain Port Adaptors

#### Description:

- > Improves manufacturing logistics
- > Motor supplied ready for connection to ½" BSPP male fitting

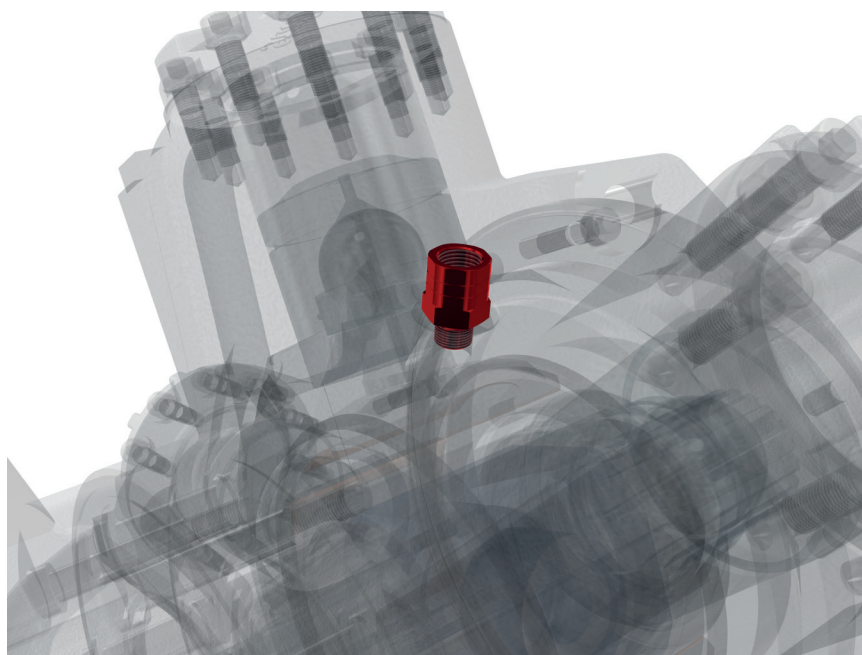

#### Technical Information

Motor Type	Adaptor Supplied
HMB030	⅜" BSP to ½" BSPP
HMB045	⅜" BSP to ½" BSPP
HMB045-F(M)3/SM3	¾" UNF 2B to ½" BSPP
HMB060	¾" UNF 2B to ½" BSPP
HMB080	¾" UNF 2B to ½" BSPP
HMB100	¾" UNF 2B to ½" BSPP
HM(HD)B125	¾" UNF 2B to ½" BSPP

Motor Type	Adaptor Supplied
HM(HD)B150	¾" UNF 2B to ½" BSPP
HM(HD)B200	¾" UNF 2B to ½" BSPP
HM(HD)B270	¾" UNF 2B to ½" BSPP
HM(HD)B325	¾" UNF 2B to ½" BSPP
HM(HD)B400	¾" UNF 2B to ½" BSPP
HMB500	¾" UNF 2B to ½" BSPP

One or two drain adaptors can be supplied.


#### Applicable to:

HMB 030	HMB 030 -F(M)3/SM3	HMB 045	HMB 045 -F(M)3/SM3	HMB 060/080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HM(HD)B 400	HMB 500
●	●	●	●	●	●	●	●	●	●	●	●

Please contact Kawasaki to order this feature.

## 2-12 Special Features (cont)

### ◆ Mounting Hole Diameter

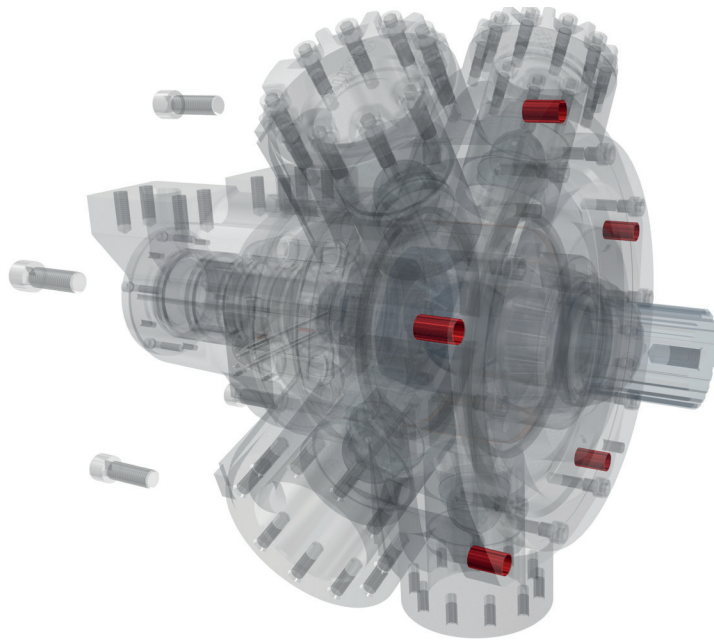

#### Description:

- > Matching mounting holes to bolts
- >  $\Phi 21\text{mm}$  and  $\Phi 22\text{mm}$  options available

#### Technical Information

In different markets, different bolt standards are adopted which may not be best suited to the standard  $\Phi 20\text{mm}$  mounting hole diameter on the HMB motors. To give a correct fit and optimum installation,  $\Phi 21\text{mm}$  or  $\Phi 22\text{mm}$  holes can be selected on larger frame sizes.




#### Applicable to:

HMB 030	HMB 030 -F(M)3/SM3	HMB 045	HMB 045 -F(M)3/SM3	HMB 060/080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HM(HD)B 400	HMB 500
○	○	○	○	●	●	●	●	●	●	●	●

Please contact Kawasaki to order this feature.

## 2-12 Special Features (cont)

### ◆ Marine Specification Primer Paint

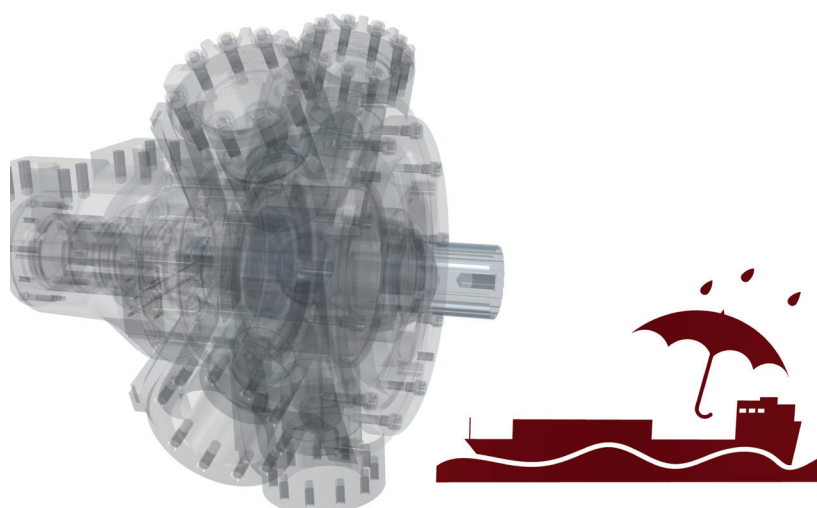

#### Description:

- > Improves corrosion and water resistance of the finishing system
- > Excellent adhesion strength
- > Recommended for marine applications

#### Technical Information

Colour	Red oxide
Type	Single pack epoxy etching primer
Standard	BS 3900 part A 8
Dry film thickness	> 12µm

#### Applicable to:

HMB 030	HMB 030 -F(M)3/SM3	HMB 045	HMB 045 -F(M)3/SM3	HMB 060/080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HM(HD)B 400	HMB 500
●	●	●	●	●	●	●	●	●	●	●	●

Please contact Kawasaki to order this feature.


## 2-12 Special Features (cont)

### Tj speed sensor with Tk readout option


#### Tj Speed Sensor Technical Specification

The Tj speed sensor is a hall effect dual channel speed probe that can provide feedback of both speed and direction.


Signal Outputs:	Square wave plus directional signal
Power Supply:	8 to 32V @ 40mA
Protection class:	IP68
Output frequency:	16 pulses/revolution

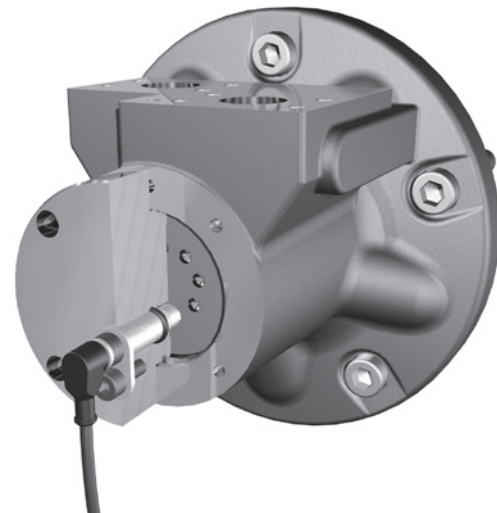

#### Installation Details

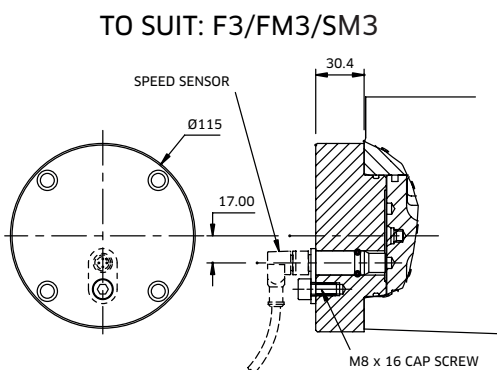

'Tj'

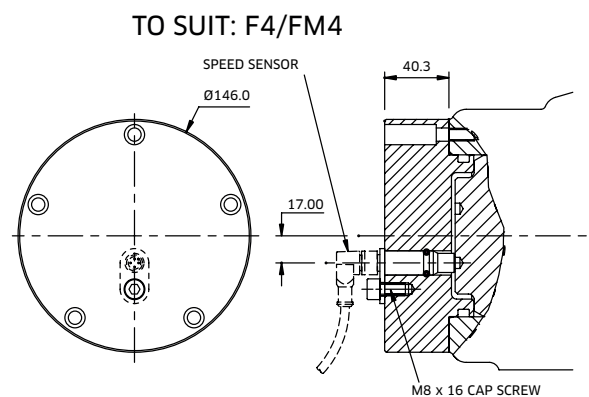


#### Tk Output Module

The Tk option consists of the Tj speed sensor together with the optional T401 output module.

The addition of the T401 module provides a software configured single channel tachometer and relay with a 0/4-20mA analogue current output.

The software and calibration cable is also provided.

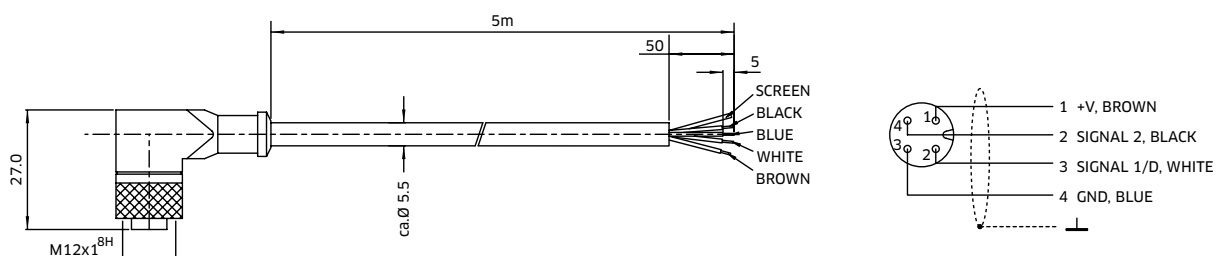


**NOTES**

# 3 Dimensions

HMB MOTORS

## 3-1 HMB030

### ◆ Monobloc - 'P', 'S' and 'Z' Shafts

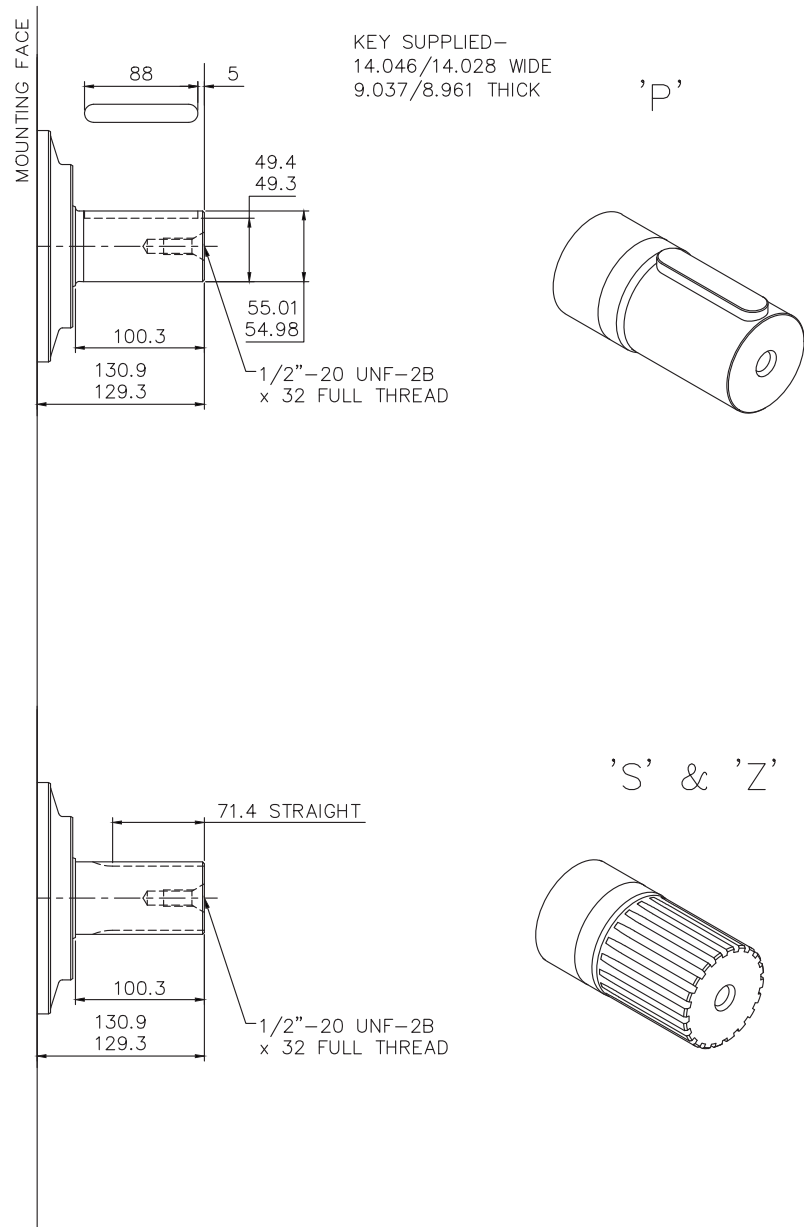


#### SPLINE DATA

'S'	
TO BS 3550 (ANSI B92.1 CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	17
PITCH	8/16
MAJOR DIAMETER	56.41/56.28
FORM DIAMETER	50.703
MINOR DIAMETER	50.07/49.60
PIN DIAMETER	6.096
DIAMETER OVER PINS	62.985/62.931

'Z'	
DIN 5480, W55 X 3 X 17 X 7h	

### 3-1 HMB030 (cont)

#### ◆ 2 Piece - 'P', 'S' and 'Z' Shafts

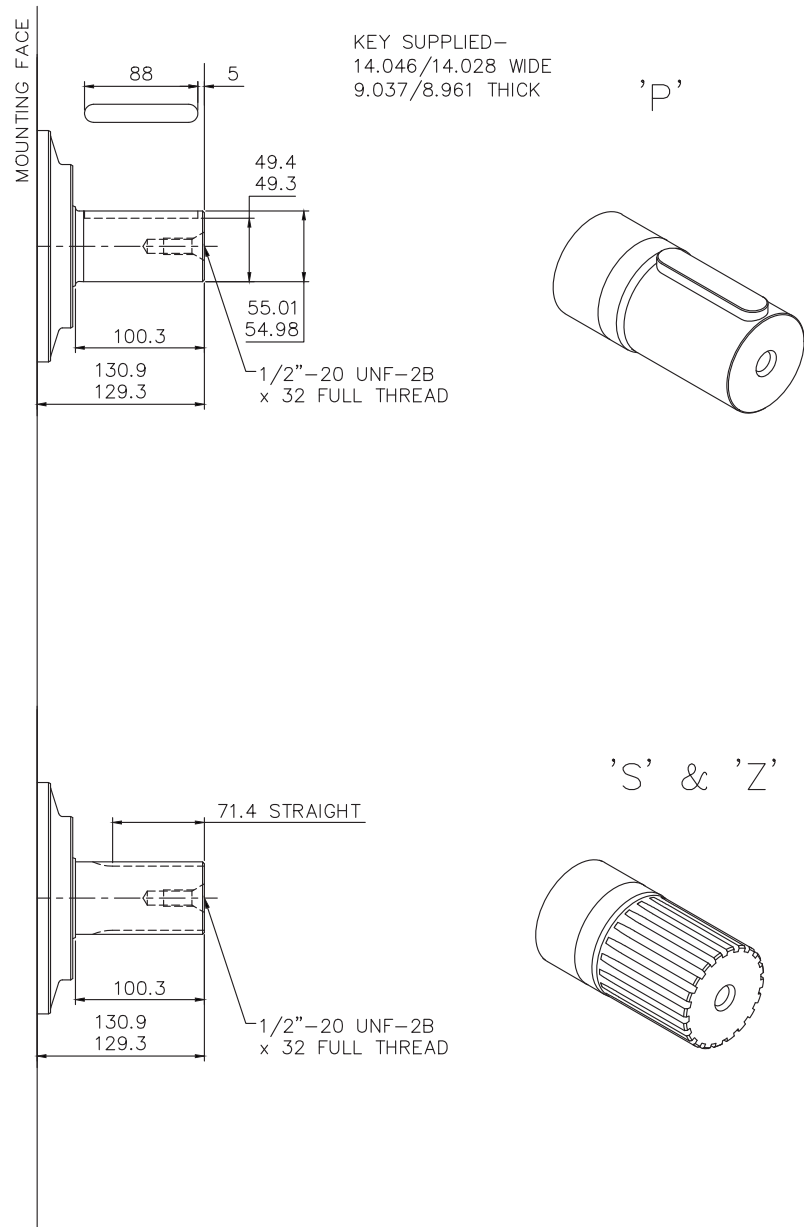

#### SPLINE DATA


'S'	
TO BS 3550 (ANSI B92.1 CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	17
PITCH	8/16
MAJOR DIAMETER	56.41/56.28
FORM DIAMETER	50.703
MINOR DIAMETER	50.07/49.60
PIN DIAMETER	6.096
DIAMETER OVER PINS	62.985/62.931

'Z'	
DIN 5480, W55 X 3 X 17 X 7h	

### 3-1 HMB030 (cont)


#### ◆ 2 Piece - Installation

3/8" BSP x 17 FULL THREAD (CHOICE OF 3 POSITIONS) (2 NORMALLY PLUGGED)  
 NOTE: - ENSURE ON INSTALLATION THAT DRAIN IS TAKEN FROM ABOVE MOTOR CENTRELINE.  
 DO NOT EXCEED 12 DEPTH OF COUPLING IN TO DRAIN PORT

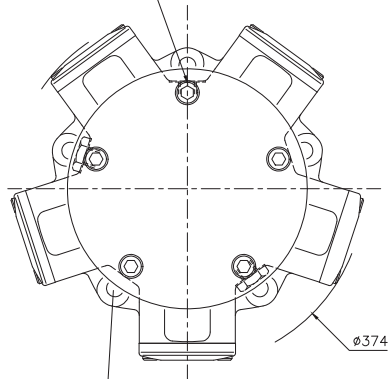

5 HOLES  $\phi 18$  EQUI-SPACED AS SHOWN ON A  $\boxed{260.1}$  P.C.D. SPOTFACED TO GIVE AN EFFECTIVE  $\phi 35$ .  
 $\boxed{\pm \phi 0.15}$

REVERSE PORT CONNECTIONS FOR OPPOSITE DIRECTION OF SHAFT ROTATION  
 FLOW DIRECTION FOR ALL VLV HSG VARIANTS EXCEPT F2/FM2/SM3

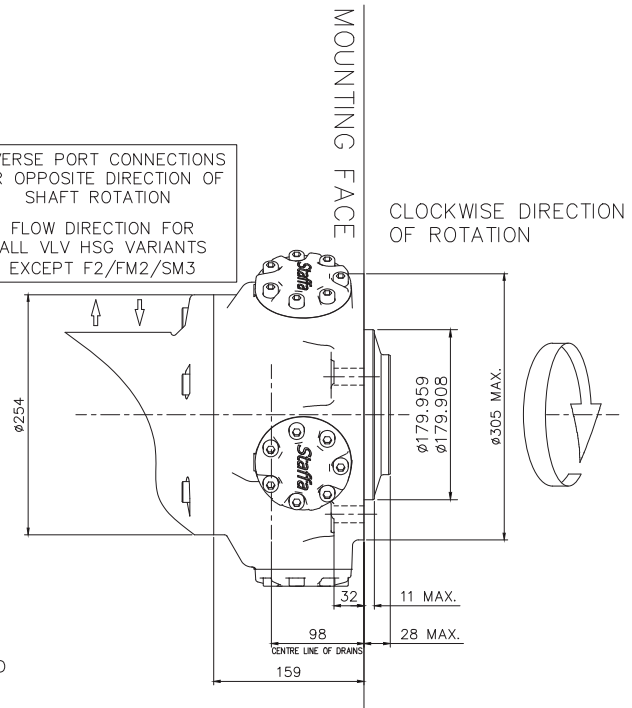



### 3-1 HMB030 (cont)

#### ◆ Monobloc - Side Port Installation



2 PORTS  $\varnothing 25$  TO SUIT SAE  
CODE 61, 1" NOM. SPLIT FLANGE

PORT FLANGE BOLT TAPPING SIZE -
F: 3/8"-16 UNC-2B X 16 FULL THREAD DEPTH
FM: M10 X P1.5 X 16 FULL THREAD DEPTH


EXAMPLE FOR MODEL CODE.

SIDE ENTRY MOTORCASE - HMB030/P/FM/21

3/8" BSP DRAIN  
NOTE: - ENSURE ON INSTALLATION THAT DRAIN IS  
CONNECTED TO PORT ABOVE MOTOR

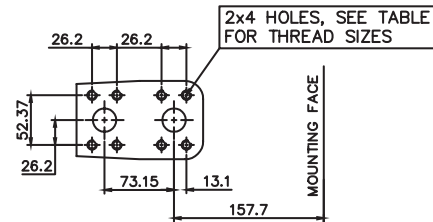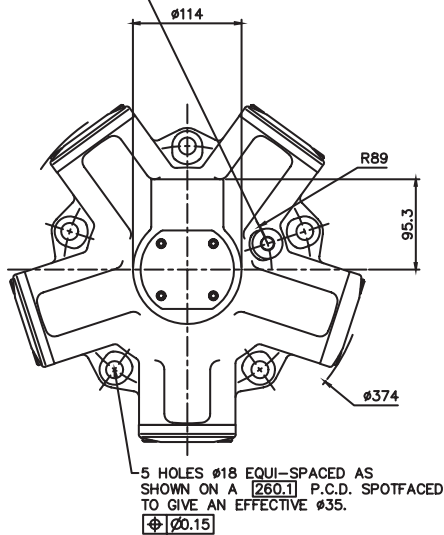


REVERSE PORT CONNECTIONS  
FOR OPPOSITE DIRECTION OF  
SHAFT ROTATION  
FLOW DIRECTION

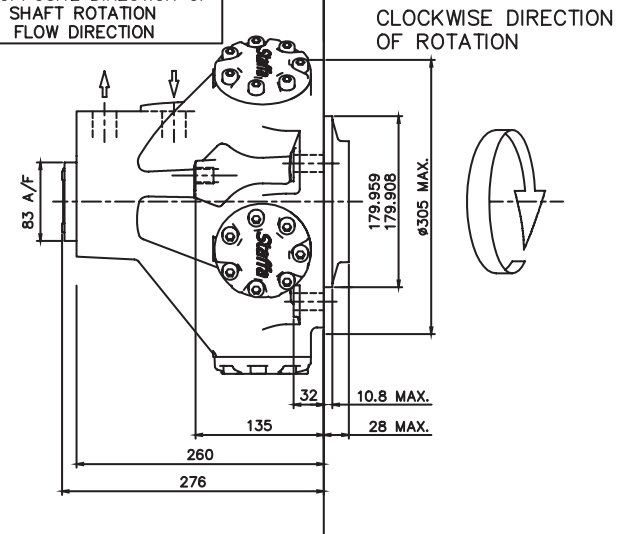

# 3-2 HMB045

## ◆ Monobloc - 'P', 'S' & 'Z' Shafts

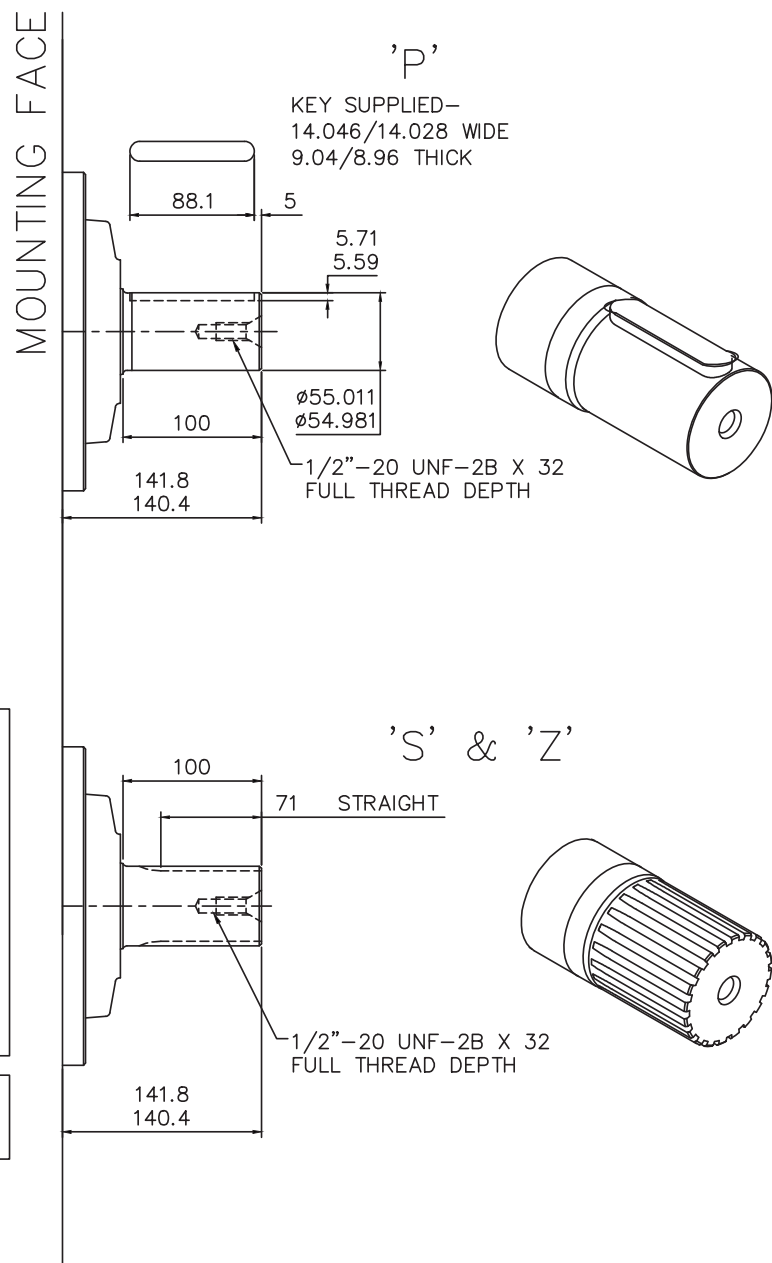


### SPLINE DATA

<b>'S'</b>	
TO BS 3550 (ANSI B92.1 CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	17
PITCH	8/16
MAJOR DIAMETER	56.41/56.29
FORM DIAMETER	50.703
MINOR DIAMETER	50.06/49.60
PIN DIAMETER	6.096
DIAMETER OVER PINS	62.984/62.931
<b>'Z'</b>	
DIN 5480 W55 x 3 x 17 x 7h	

### 3-2 HMB045 (cont)

#### ◆ 2 Piece - 'P', 'S', 'Z' & Q Shafts

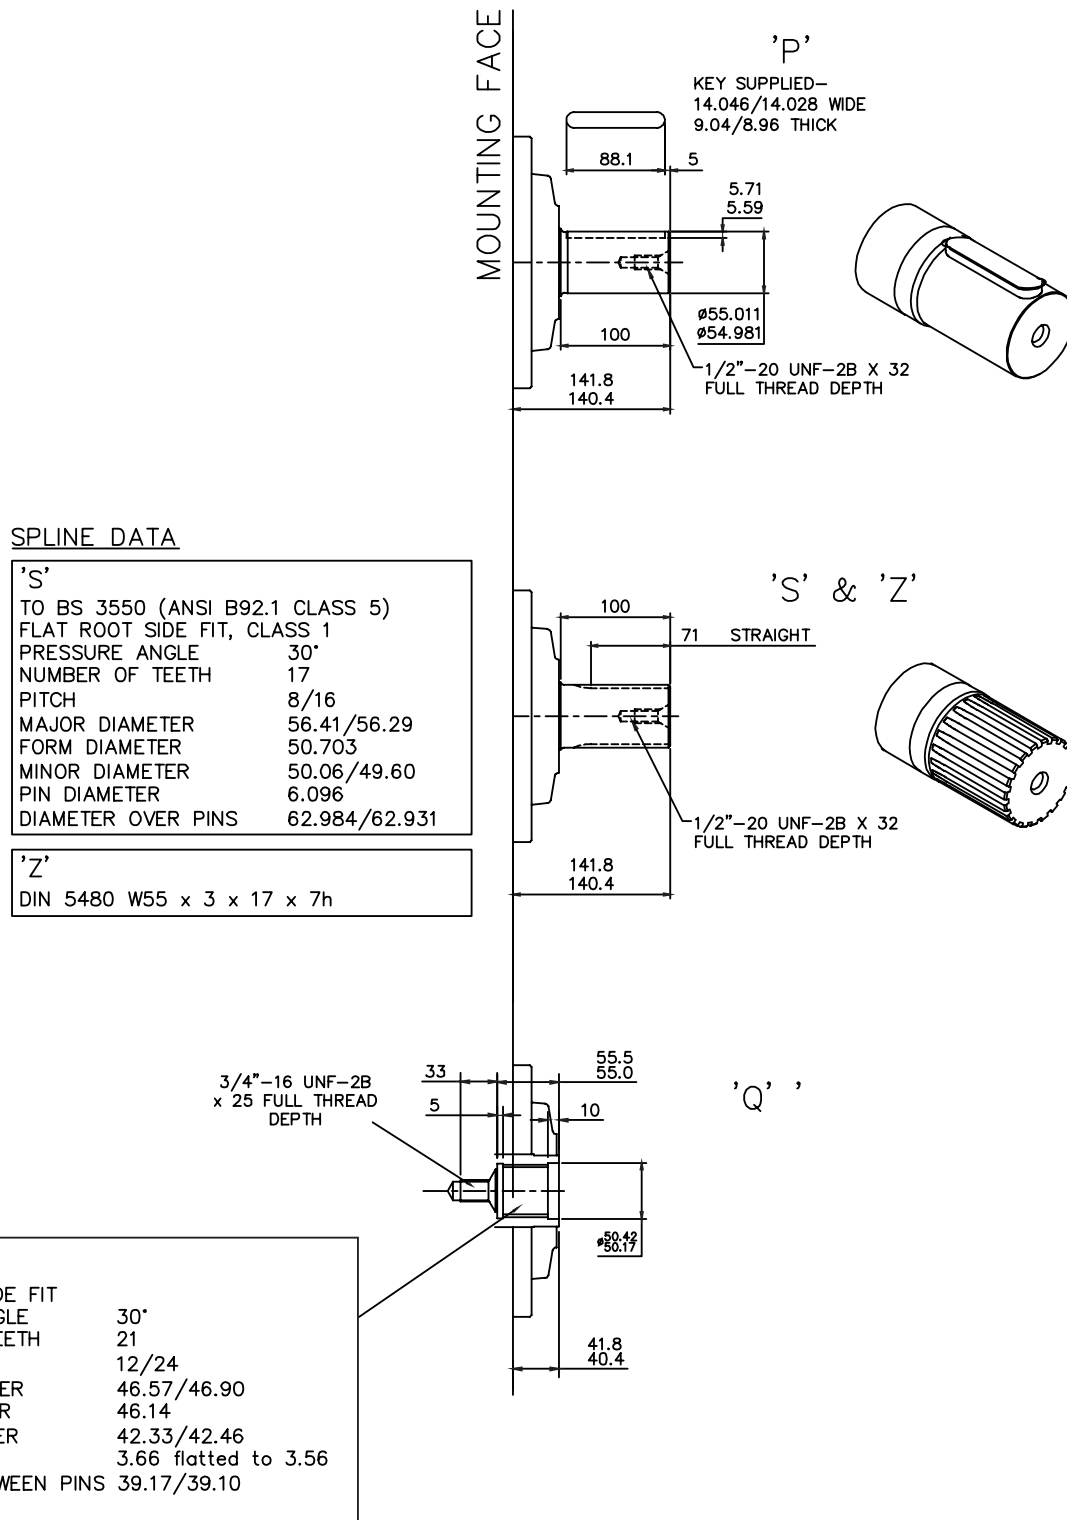


## 3-2 HMB045 (cont)

### 2 Piece - Installation

3/4"-16 UNF-2B DRAIN (CHOICE OF 3 POSITIONS)  
(2 NORMALLY PLUGGED)


NOTE: - ENSURE ON INSTALLATION THAT DRAIN IS  
TAKEN FROM ABOVE MOTOR CENTRELINE.

DO NOT EXCEED 12 DEPTH OF COUPLING  
IN TO DRAIN PORT

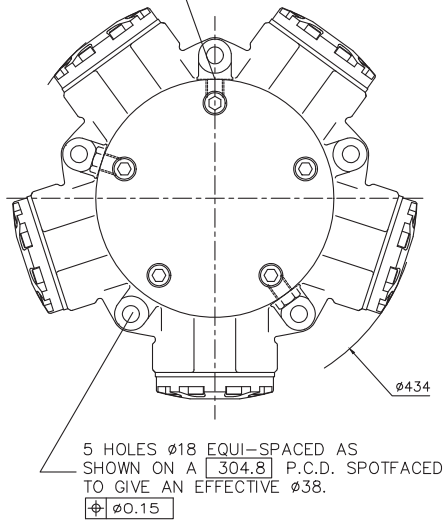

REVERSE PORT CONNECTIONS  
FOR OPPOSITE DIRECTION OF  
SHAFT ROTATION


FLOW DIRECTION FOR  
ALL VLV HSG VARIANTS  
EXCEPT F2/FM2/SM3

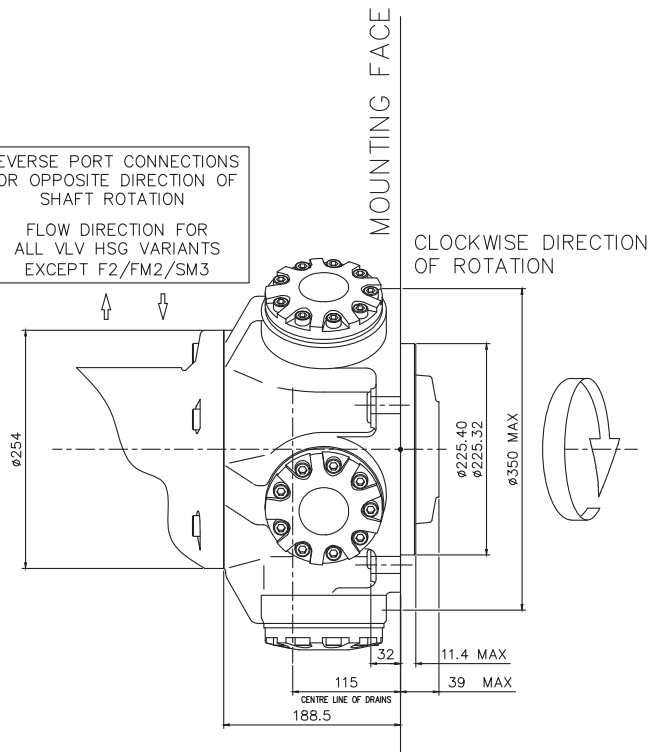

### Monobloc - Installation

3/8" BSP DRAIN. 19mm DEEP. SPOTFACED  $\phi 28$   
(CHOICE OF 3 POSITIONS) (1 NORMALLY PLUGGED)


NOTE: - ENSURE ON INSTALLATION THAT DRAIN IS  
TAKEN FROM ABOVE MOTOR CENTRELINE.

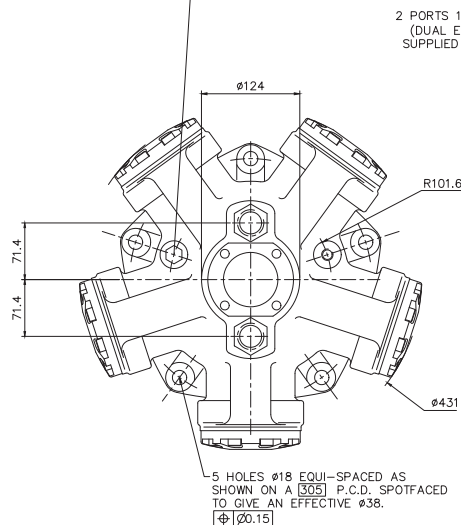

REVERSE PORT CONNECTIONS  
FOR OPPOSITE DIRECTION OF  
SHAFT ROTATION

FLOW DIRECTION


2 PORTS 1" BSP X 25 DEEP.  
(DUAL ENTRY MODELS ARE  
SUPPLIED WITH THESE REAR  
PORTS PLUGGED)

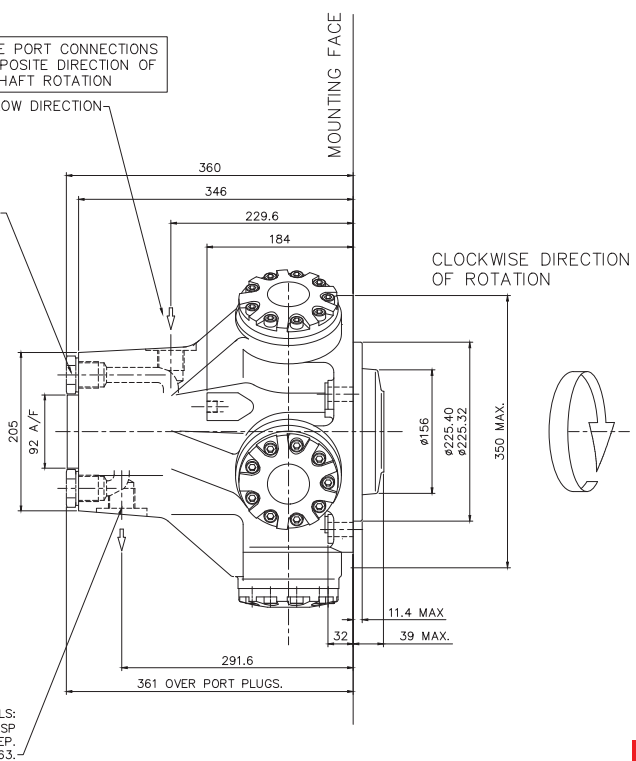

DUAL ENTRY MODELS:  
2 SIDE PORTS 1" BSP  
X 25 DEEP.  
SPOTFACED TO  $\phi 63$ .

3-3 HMB060/080

◆ 'P', 'S' & 'Z' Shafts

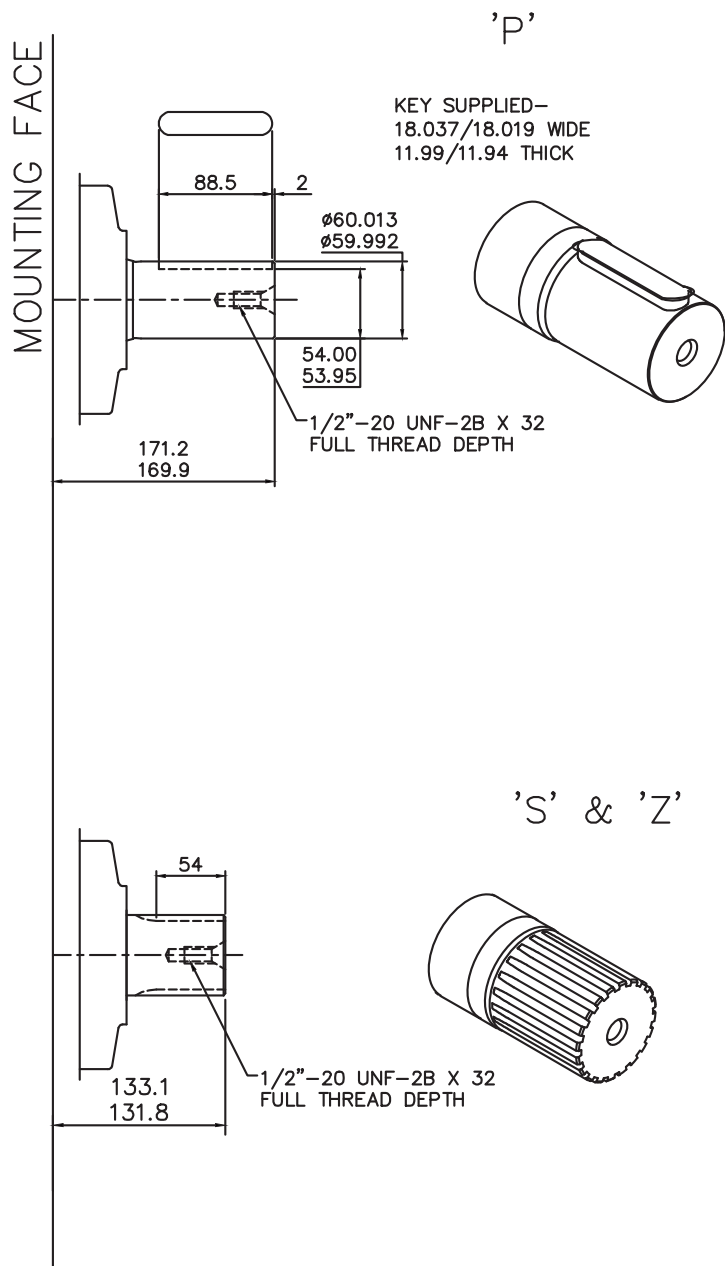


SPLINE DATA

'S'	
TO BS 3550 (ANSI B92.1 CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	14
PITCH	6/12
MAJOR DIAMETER	62.553/62.425
FORM DIAMETER	55.052
MINOR DIAMETER	54.084/53.525
PIN DIAMETER	8.128
DIAMETER OVER PINS	71.593/71.544

'Z'	
DIN 5480 W70 x 3 x 30 x 22 x 7h	


3-3 HMB060/080 (cont)

◆ 'T' & 'Q' Shafts

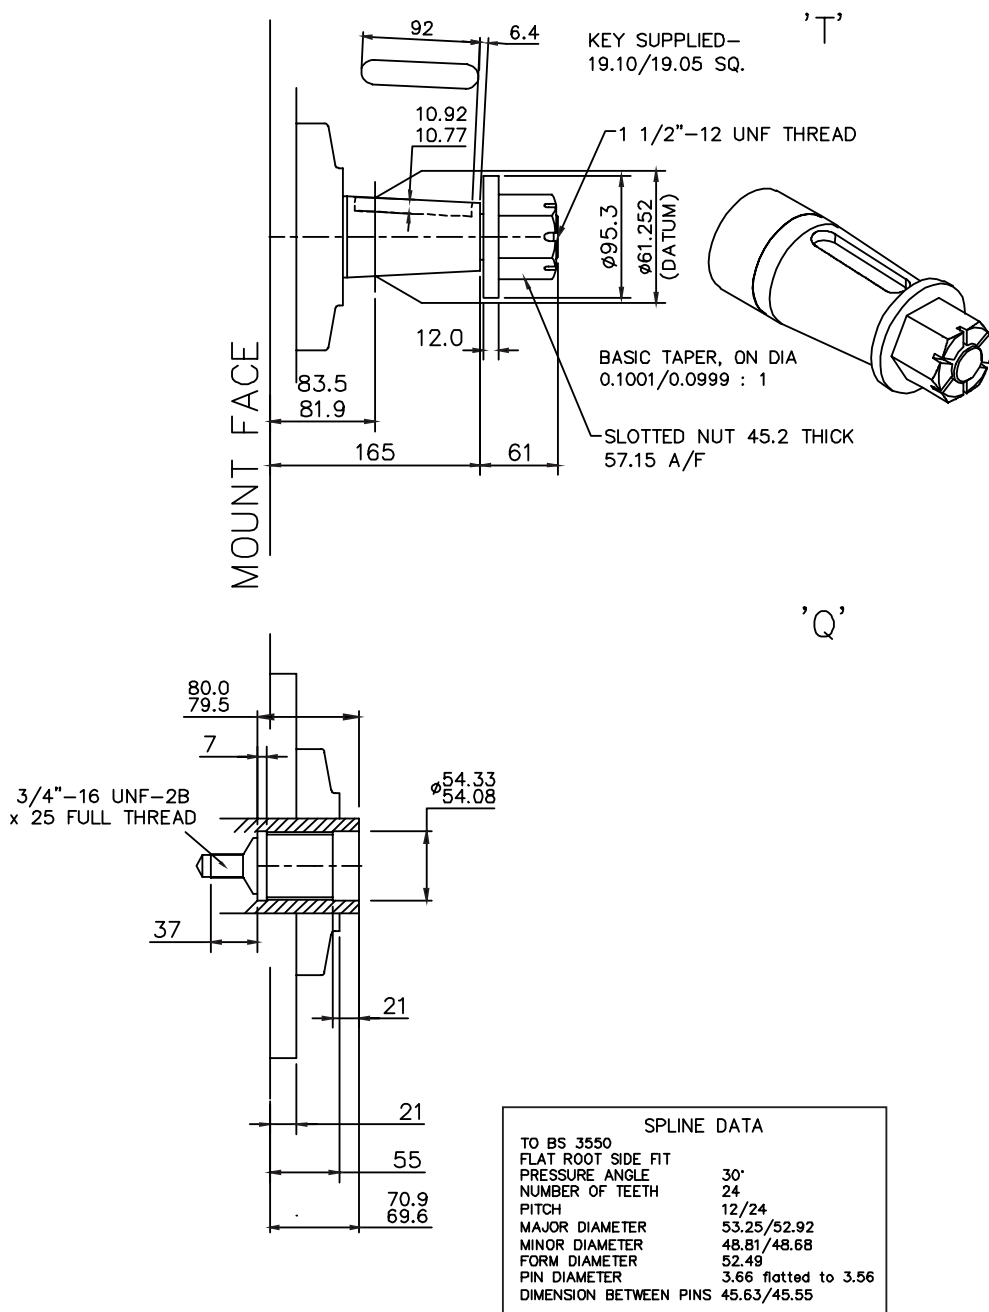

### 3-3 HMB060/080 (cont)

#### Installation

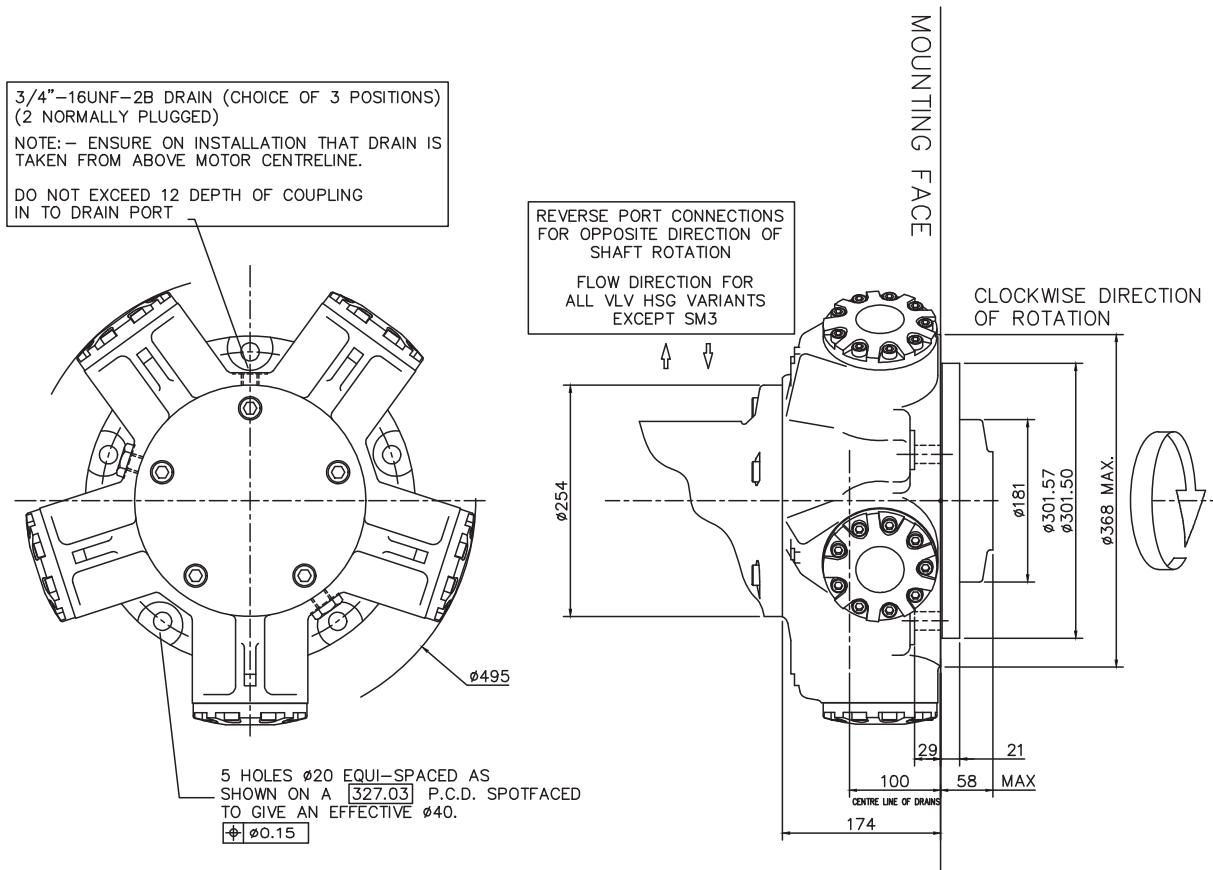


# 3-4 HMB100

## ◆ 'P', 'S' & 'Z' Shafts

### SPLINE DATA

<b>'S'</b>	
TO BS 3550 (ANSI B92.1 CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	14
PITCH	6/12
MAJOR DIAMETER	62.553/62.425
FORM DIAMETER	55.052
MINOR DIAMETER	54.084/53.525
PIN DIAMETER	8.128
DIAMETER OVER PINS	71.593/71.544



<b>'Z'</b>	
DIN 5480 W70 x 3 x 30 x 22 x 7h	

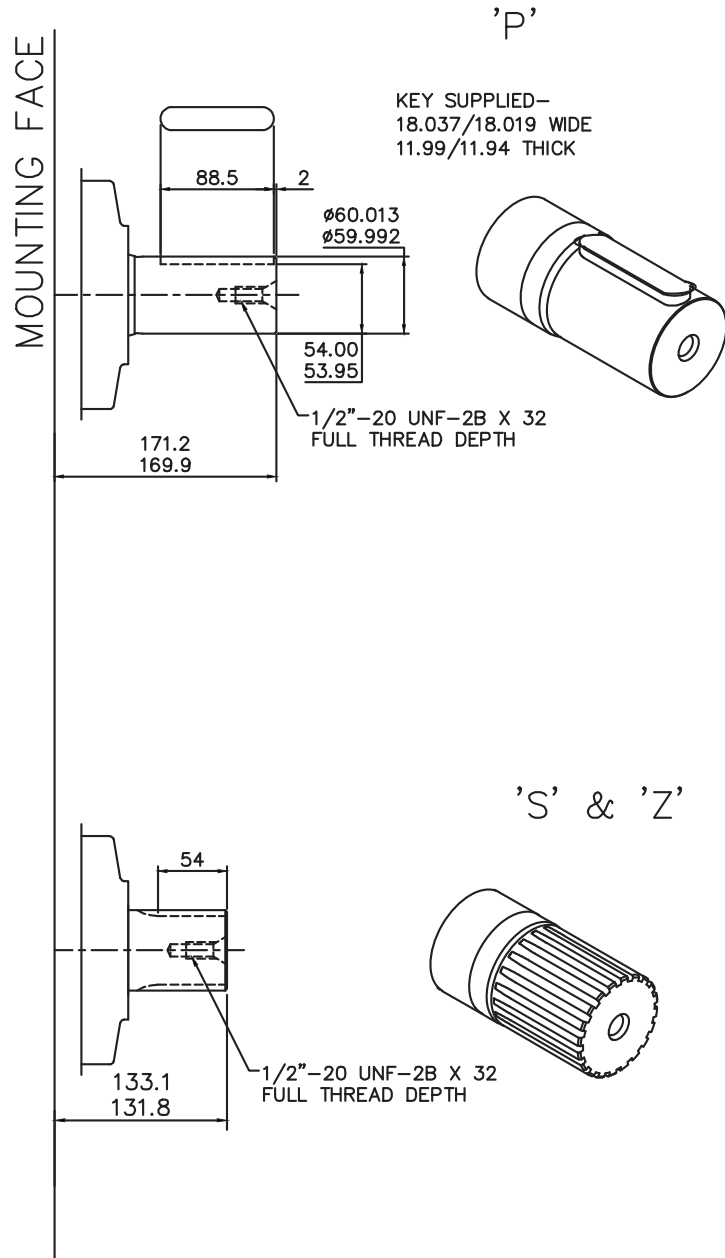



3-4 HMB100 (cont)


◆ 'T' & 'Q' Shafts

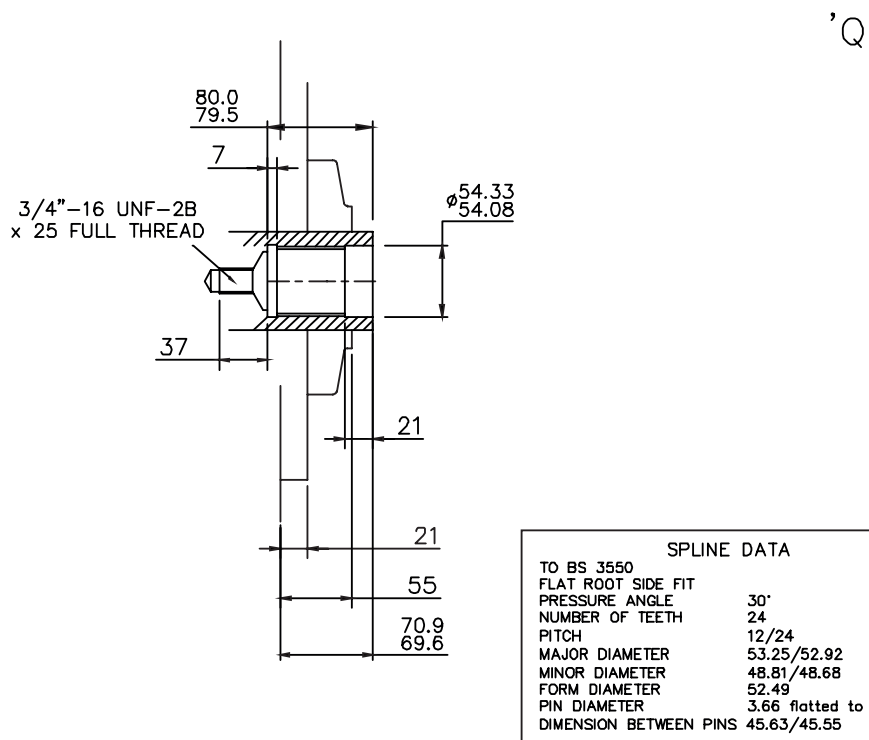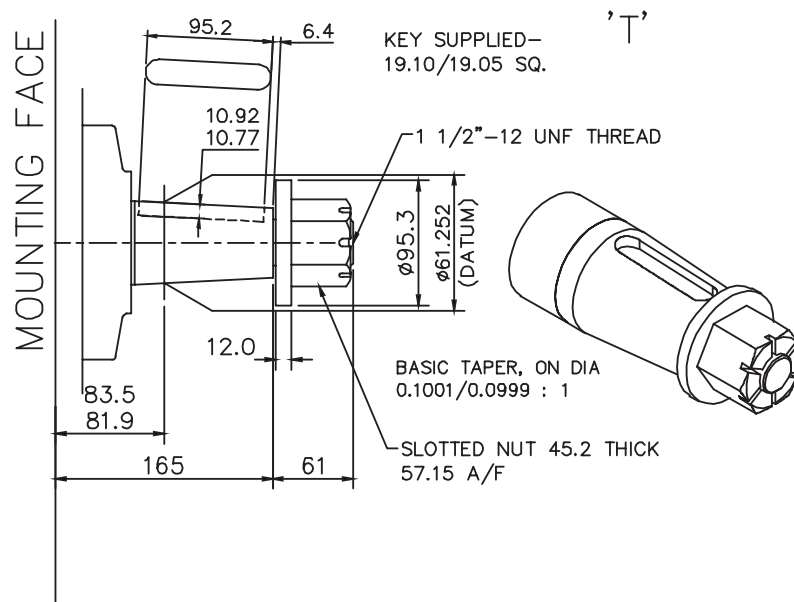

## 3-4 HMB100 (cont)


### Installation

3/4"-16UNF-2B DRAIN (CHOICE OF 3 POSITIONS)  
(2 NORMALLY PLUGGED)  
NOTE:— ENSURE ON INSTALLATION THAT DRAIN IS  
TAKEN FROM ABOVE MOTOR CENTRELINE.  
DO NOT EXCEED 12 DEPTH OF COUPLING  
IN TO DRAIN PORT

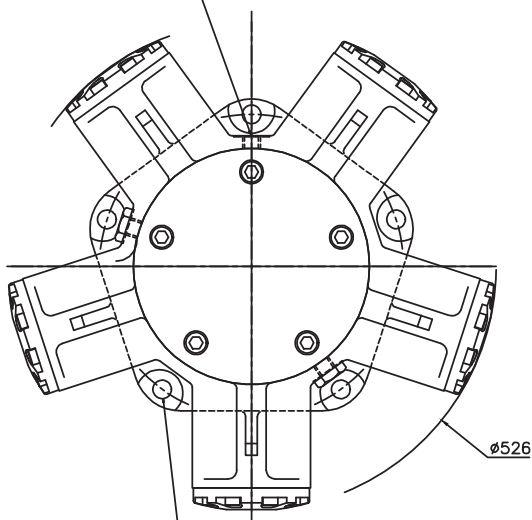

5 HOLES  $\phi 20$  EQUI-SPACED AS  
SHOWN ON A  $327.03$  P.C.D. SPOTFACED  
TO GIVE AN EFFECTIVE  $\phi 40$ .  
 $\pm 0.15$

REVERSE PORT CONNECTIONS  
FOR OPPOSITE DIRECTION OF  
SHAFT ROTATION  
FLOW DIRECTION FOR  
ALL VLV HSG VARIANTS  
EXCEPT SM3

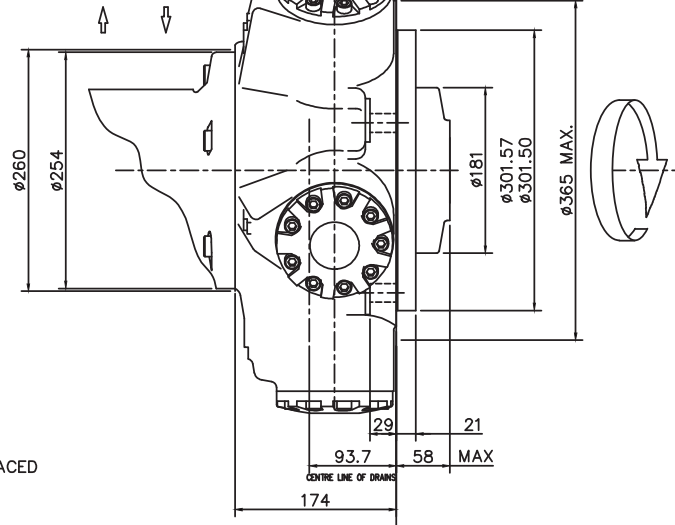

# 3-5 HM(HD)B125


## HMB125 - 'P1', 'S3', 'S4' & 'Z3' Shafts

### SPLINE DATA

<b>'S3'</b>	
TO BS 3550 (ANSI B92.1, CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	20
PITCH	6/12
MAJOR DIAMETER	87.953/87.825
FORM DIAMETER	80.264
MINOR DIAMETER	79.485/78.925
PIN DIAMETER	8.128
DIAMETER OVER PINS	97.084/97.030


<b>'S4'</b>	
PRESSURE ANGLE	20°
NUMBER OF TEETH	16
PITCH	5/10
MAJOR DIAMETER	86.360/86.233
FORM DIAMETER	76.124
MINOR DIAMETER	74.93/72.39
PIN DIAMETER	8.636
DIAMETER OVER PINS	92.710/92.581

<b>'Z3'</b>	
DIN 5480 W85 x 3 x 27 x 7h	

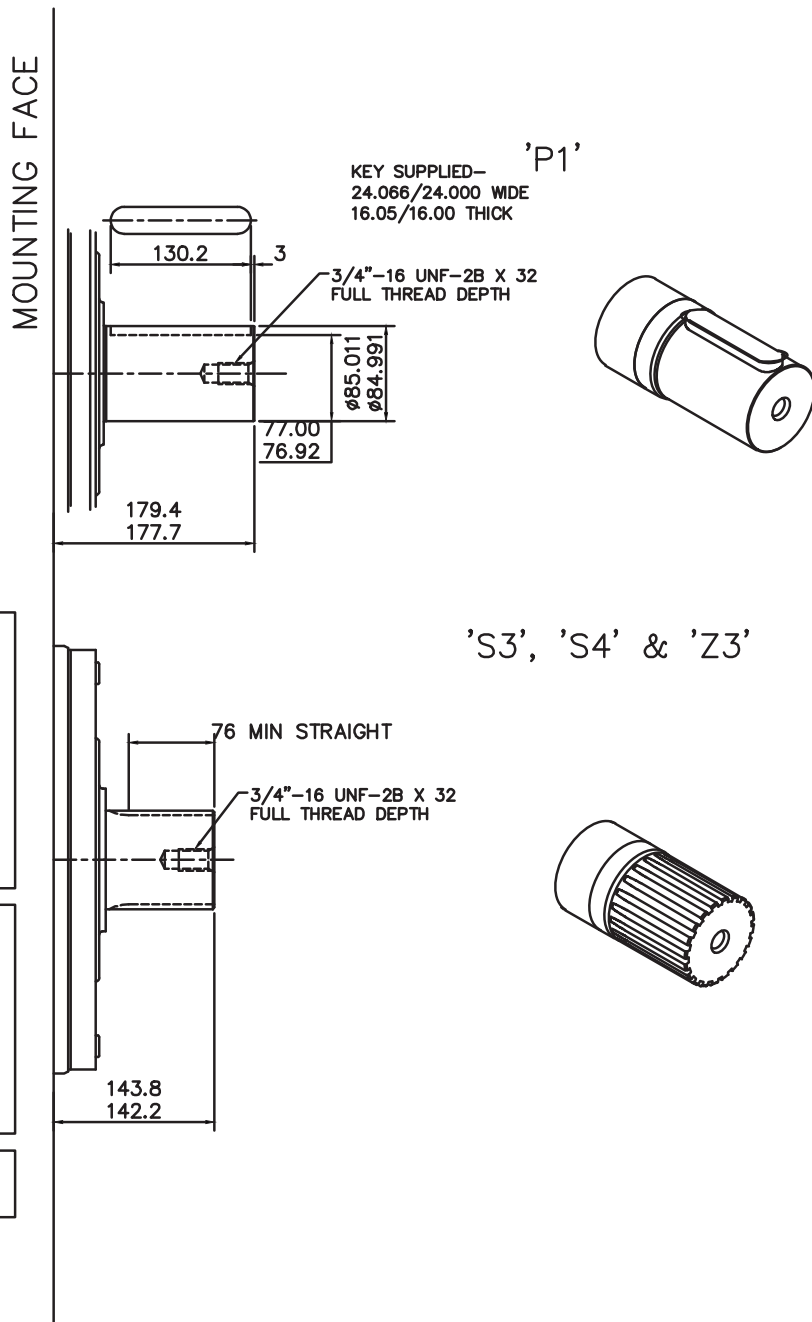


3-5 HM(HD)B125 (cont)

HMB125 - 'T' & 'Q' Shafts

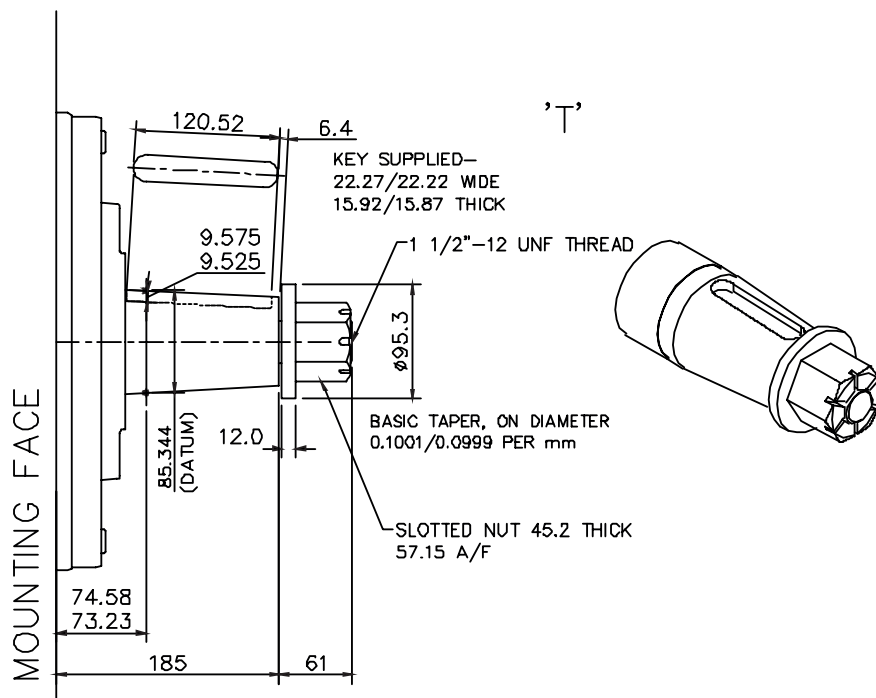


SPLINE DATA	
BS3550 : FLAT ROOT SIDE FIT	
NUMBER OF TEETH	34
PITCH	12/24
MAJOR DIAMETER	74.41/74.08
MINOR DIAMETER	69.98/69.85
PIN DIAMETER	3.66 flatted to 3.56
DIMENSION BETWEEN PINS	66.81/66.74

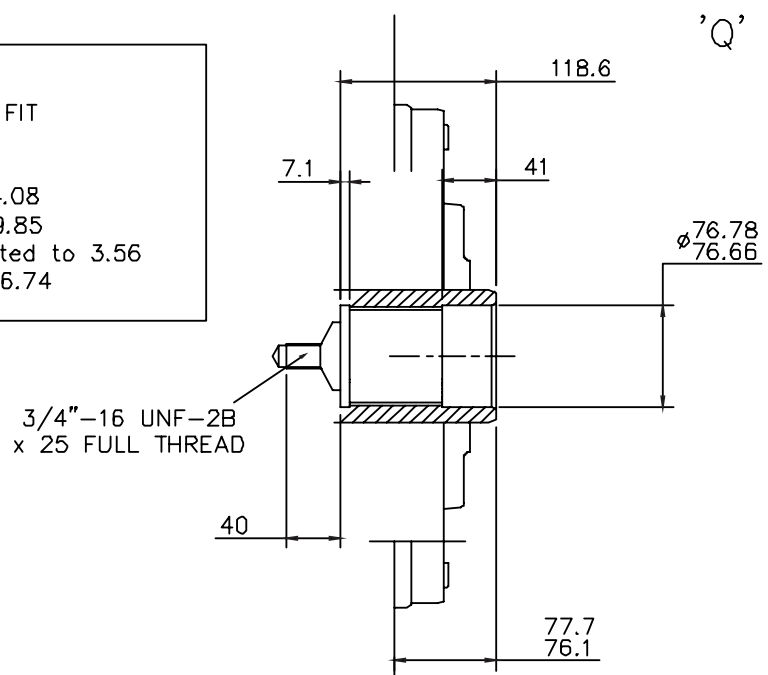

3-5 HM(HD)B125 (cont)

◆ HMHDB125 - 'P2' Shafts

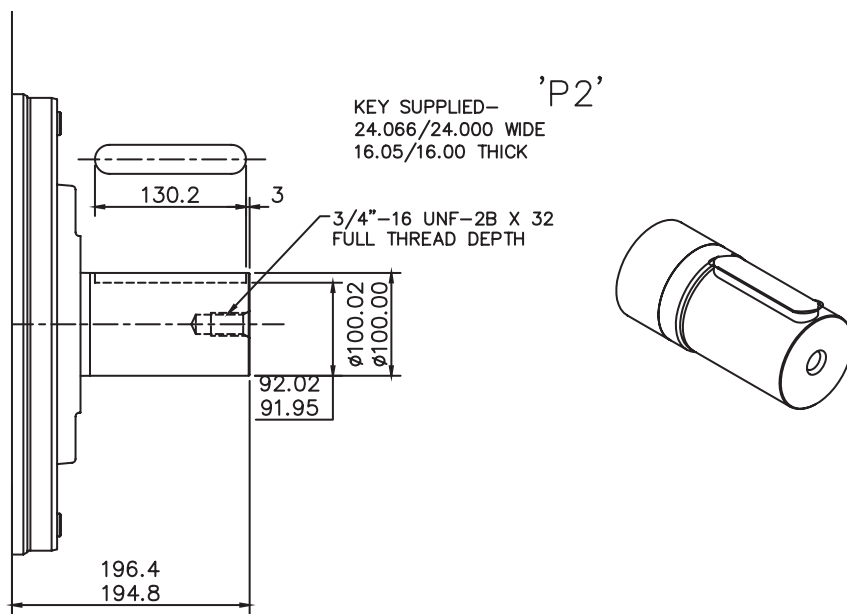


## 3-5 HM(HD)B125 (cont)

### ◆ HMHDB125 - 'S5' & 'Z5' Shafts


#### SPLINE DATA

'S5'	
PRESSURE ANGLE	20°
NUMBER OF TEETH	23
PITCH	6/12
MAJOR DIAMETER	100.652/100.526
FORM DIAMETER	92.939
MINOR DIAMETER	92.184/91.626
PIN DIAMETER	8.128
DIAMETER OVER PINS	109.573/109.517

'Z5'	
DIN 5480 W100 x 4 x 24 x 7h	

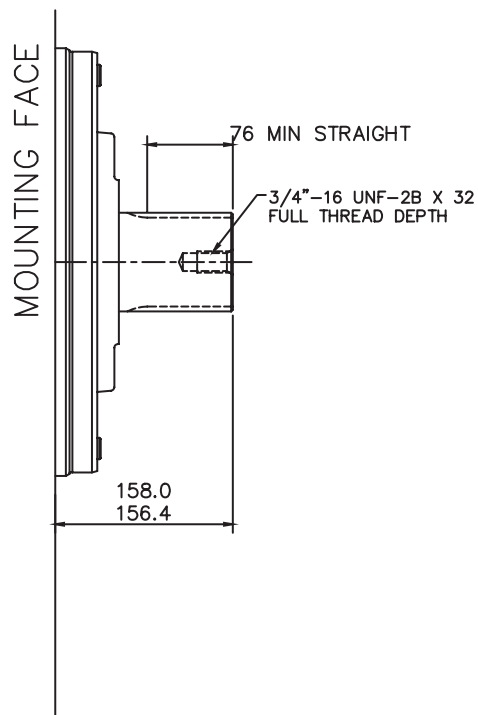


'S5' & 'Z5'



# 3-5 HM(HD)B125 (cont)



## Installation

3/4"-16 UNF-2B DRAIN (CHOICE OF 3 POSITIONS)  
(2 NORMALLY PLUGGED)  
NOTE - ENSURE ON INSTALLATION THAT DRAIN IS TAKEN FROM ABOVE MOTOR CENTRELINE.  
DO NOT EXCEED 12 DEPTH OF COUPLING IN TO DRAIN PORT.

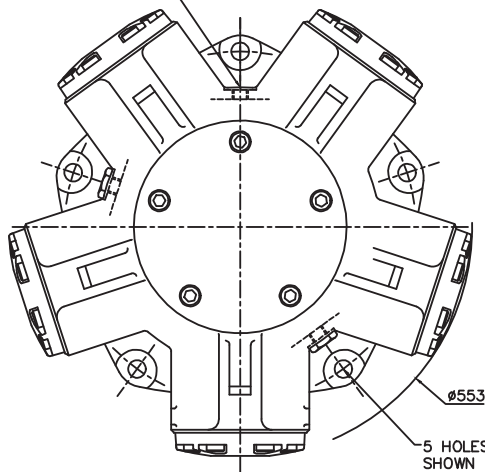

5 HOLES  $\phi 21$  EQUI-SPACED AS SHOWN ON A [419.1] PCD. SPOTFACED TO GIVE AN EFFECTIVE  $\phi 40$   
 $\phi 0.15$

REVERSE PORT CONNECTIONS FOR OPPOSITE DIRECTION OF SHAFT ROTATION  
FLOW DIRECTION FOR ALL VLV HSG VARIANTS EXCEPT SM3

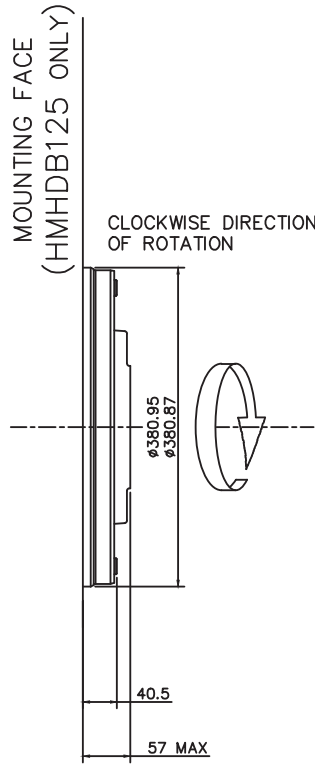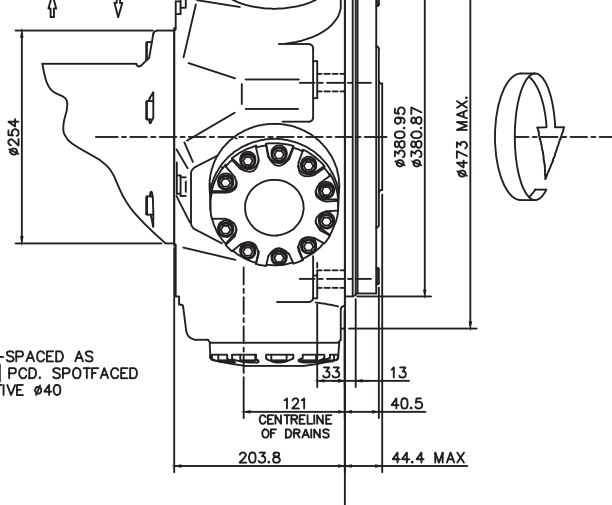

# 3-6 HM(HD)B150/200


## HMB150/200 - 'P1', 'S3', 'S4' & 'Z3' Shafts

**SPLINE DATA**

<b>'S3'</b>	
TO BS 3550 (ANSI B92.1, CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	20
PITCH	6/12
MAJOR DIAMETER	87.953/87.825
FORM DIAMETER	80.264
MINOR DIAMETER	79.485/78.925
PIN DIAMETER	8.128
DIAMETER OVER PINS	97.084/97.030

<b>'S4'</b>	
PRESSURE ANGLE	20°
NUMBER OF TEETH	16
PITCH	5/10
MAJOR DIAMETER	86.360/86.233
FORM DIAMETER	76.124
MINOR DIAMETER	74.93/72.39
PIN DIAMETER	8.636
DIAMETER OVER PINS	92.710/92.581


<b>'Z3'</b>	
DIN 5480 W85 x 3 x 27 x 7h	

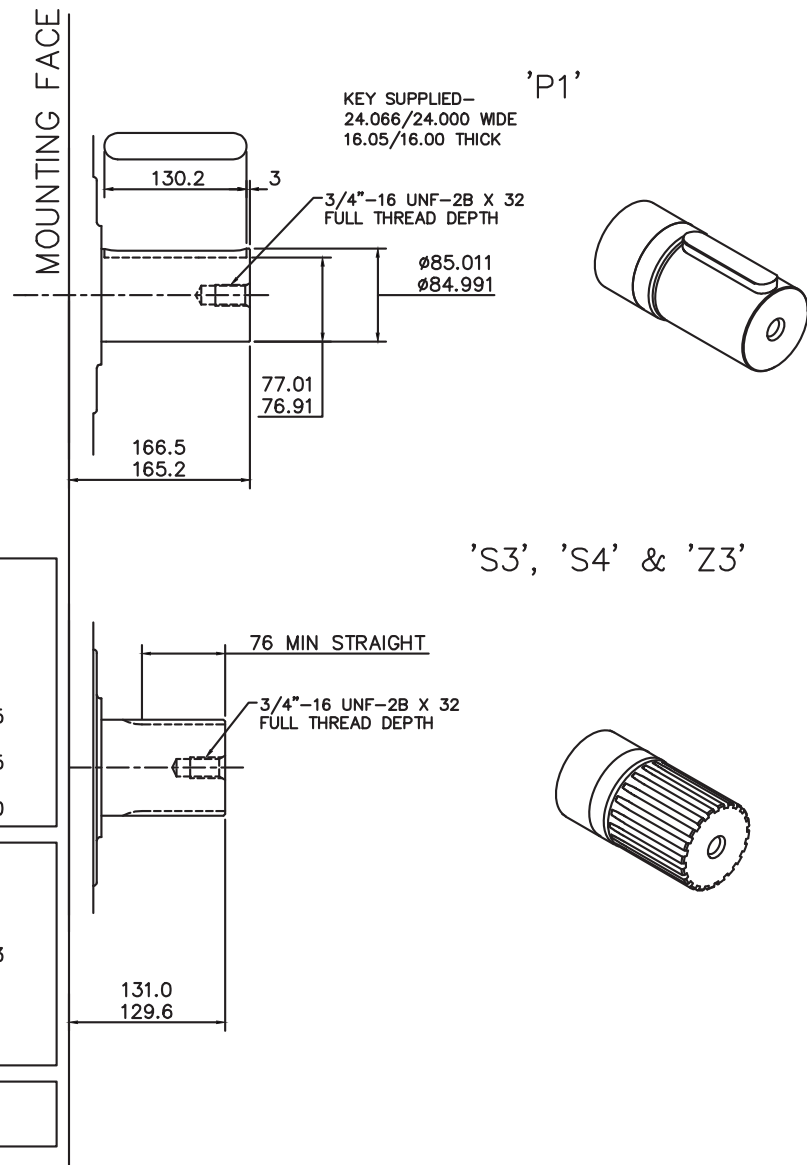



**3-6 HM(HD)B150/200 (cont)**

**◆ HMB150/200 - 'T' Shaft**

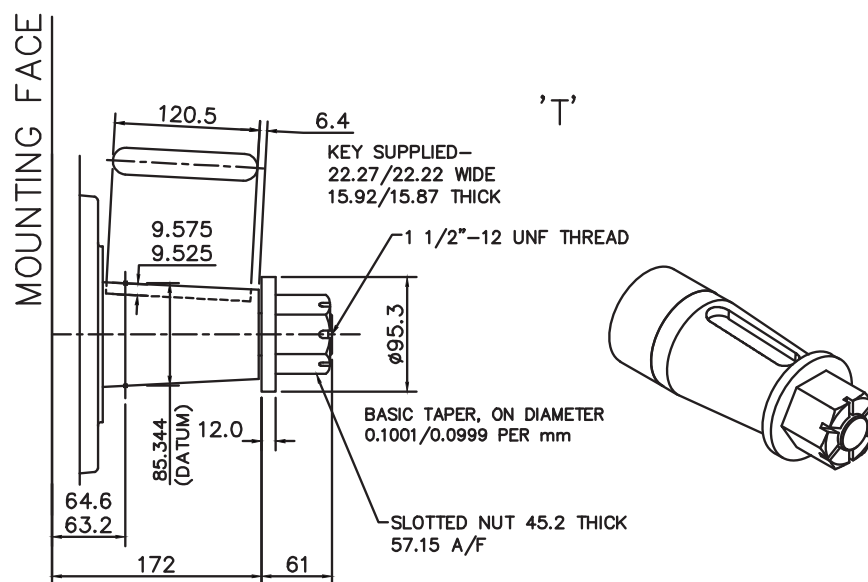


3-6 HM(HD)B150/200 (cont)

◆ HMHDB150/200 - 'P2', 'S5' & 'Z5' Shafts

**SPLINE DATA**


'S5'	
PRESSURE ANGLE	30°
NUMBER OF TEETH	23
PITCH	6/12
MAJOR DIAMETER	100.652/100.526
FORM DIAMETER	92.939
MINOR DIAMETER	92.184/91.626
PIN DIAMETER	8.128
DIAMETER OVER PINS	109.573/109.517

'Z5'	
DIN 5480 W100 x 4 x 24 x 7h	

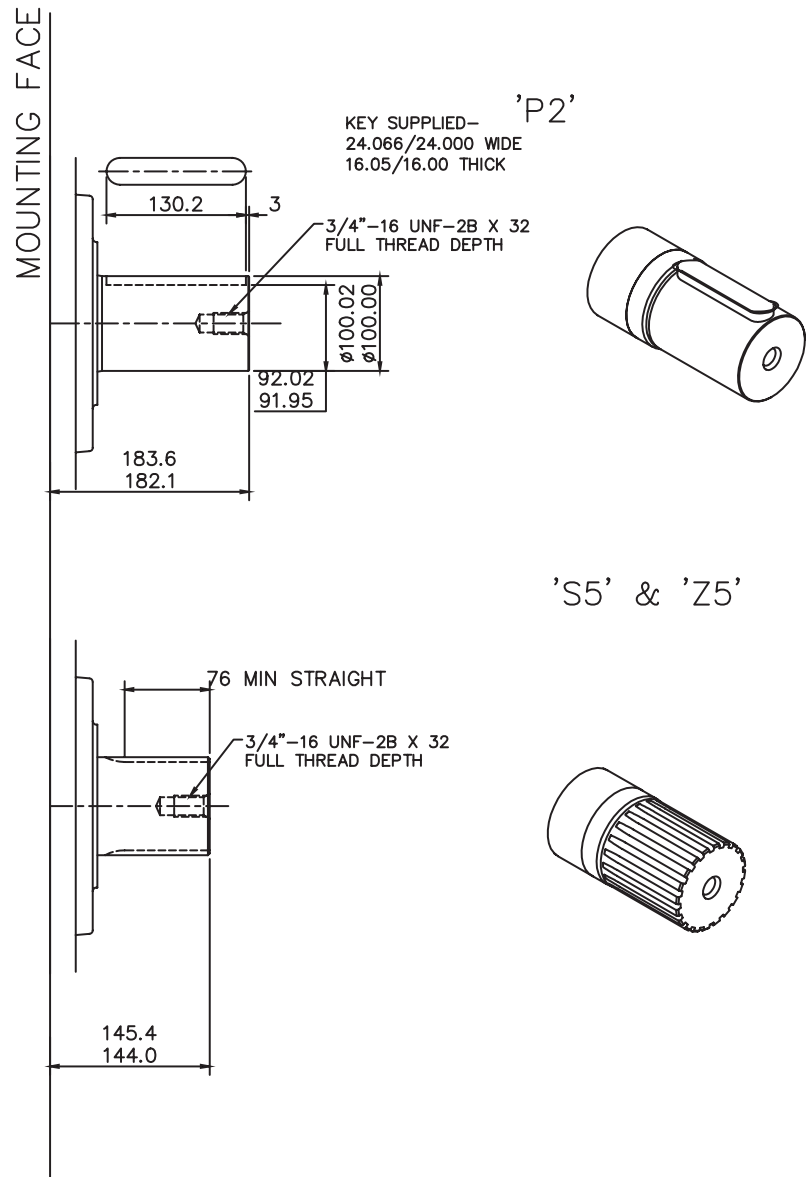


3-6 HM(HD)B150/200 (cont)

◆ HMHDB150/200 - 'Q' Shafts

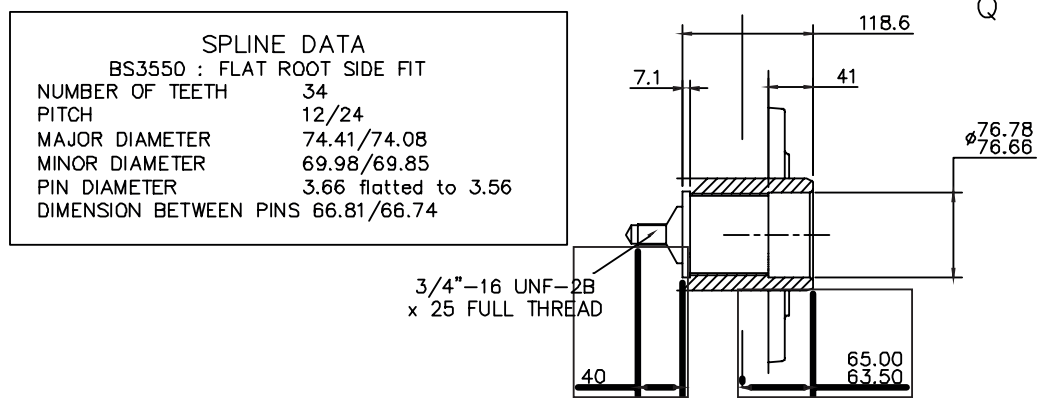

# 3-6 HM(HD)B150/200 (cont)

## Installation

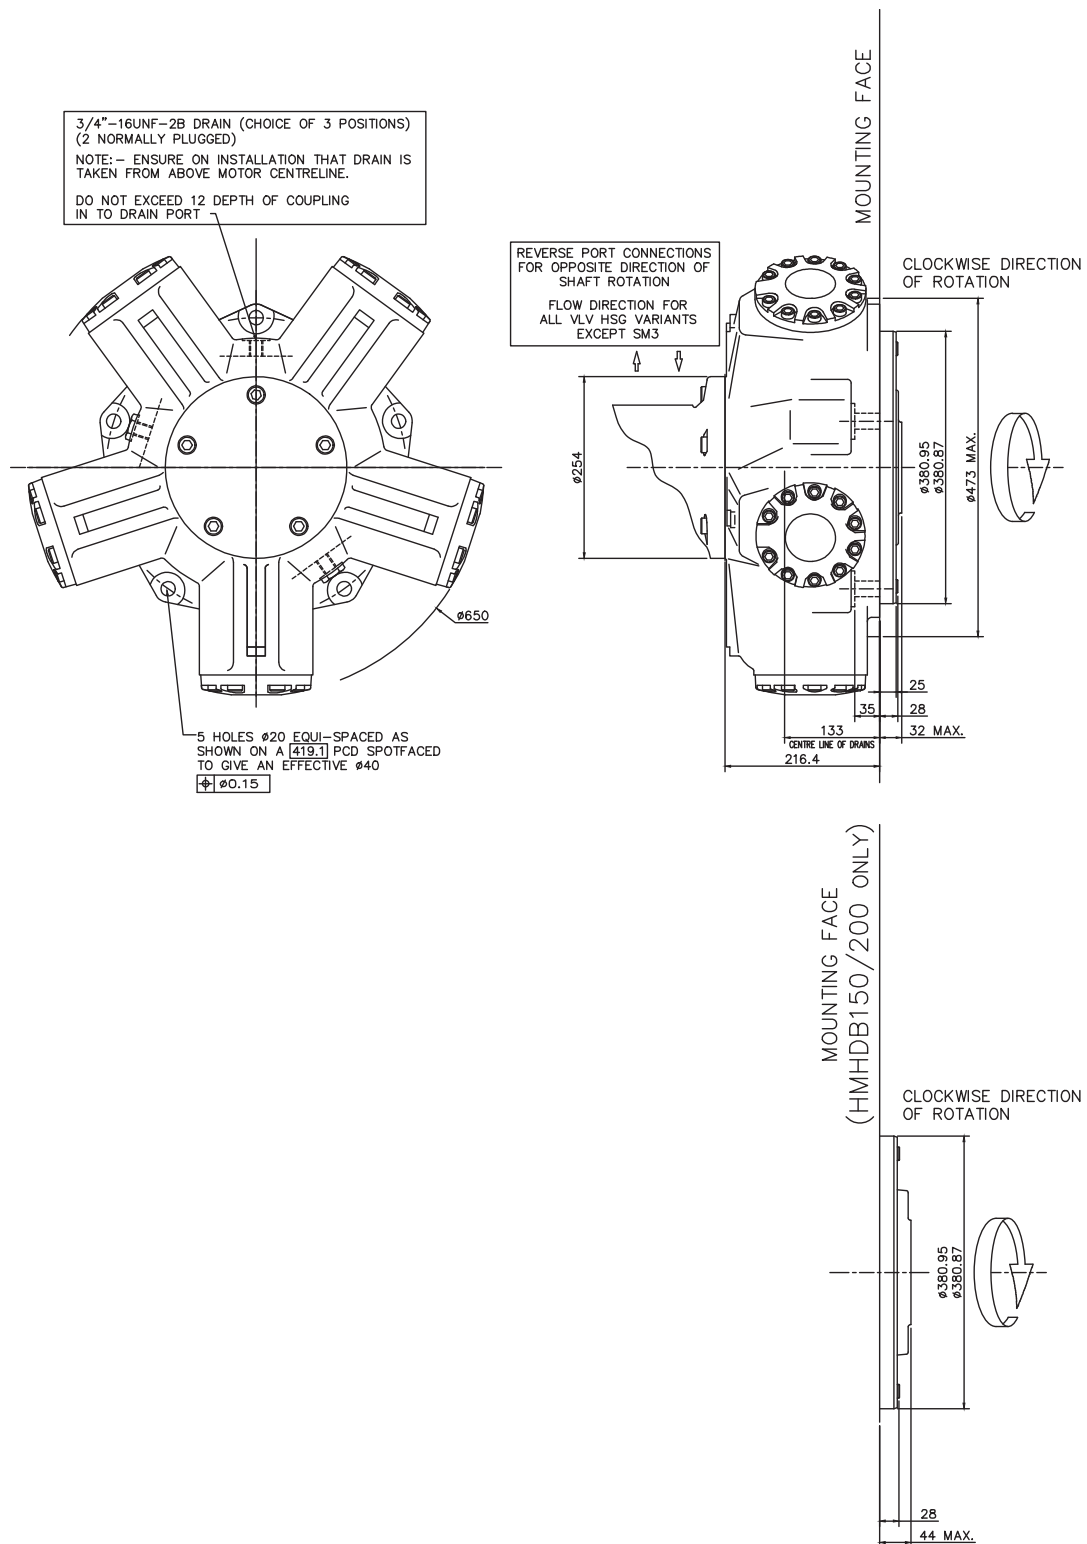


# 3-7 HM(HD)B270

## HMB270 - 'P1', 'S3' & 'Z' Shafts

### SPLINE DATA


<b>'S3'</b>	
TO BS 3550 (ANSI B92.1, CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	20
PITCH	6/12
MAJOR DIAMETER	87.953/87.825
FORM DIAMETER	80.264
MINOR DIAMETER	79.485/78.925
PIN DIAMETER	8.128
DIAMETER OVER PINS	97.084/97.030

<b>'Z'</b>	
DIN 5480 W100 x 4 x 24 x 7h	

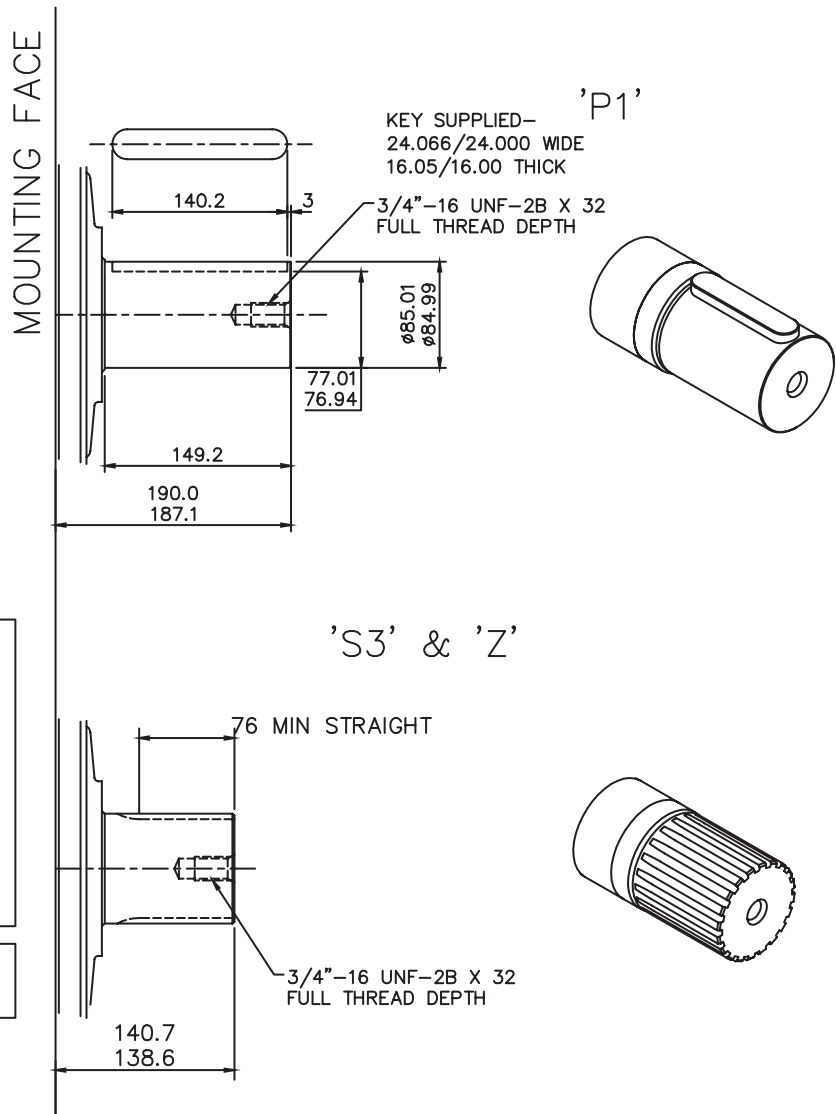


3-7 HM(HD)B270 (cont)

HMB270 - 'T' & 'Q' Shaft

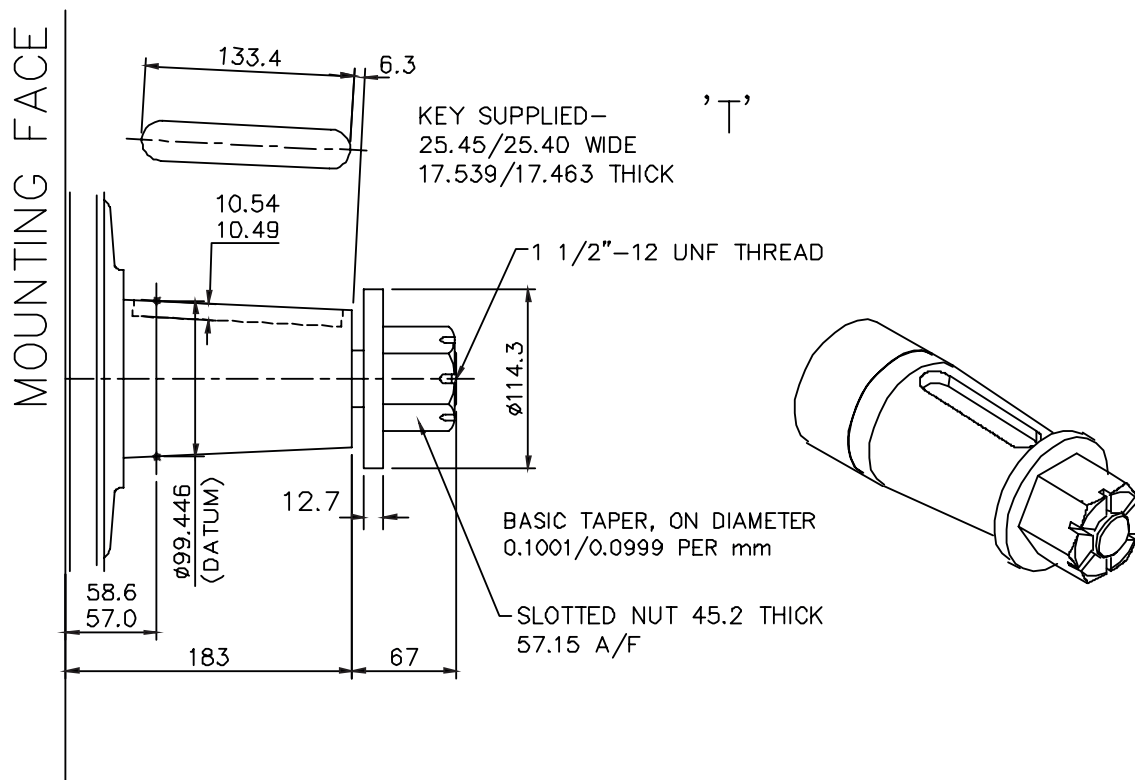


SPLINE DATA	
BS3550 : FLAT ROOT SIDE FIT	
NUMBER OF TEETH	34
PITCH	12/24
MAJOR DIAMETER	74.41/74.08
MINOR DIAMETER	69.98/69.85
PIN DIAMETER	3.66 flatted to 3.56
DIMENSION BETWEEN PINS	66.81/66.74

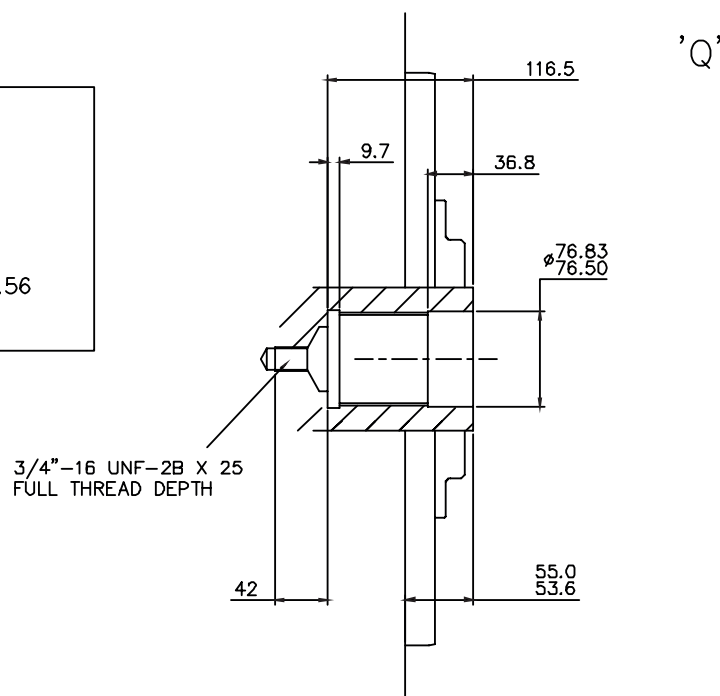

3-7 HM(HD)B270 (cont)

◆ HMHDB270 - 'P2' & 'S5' Shafts

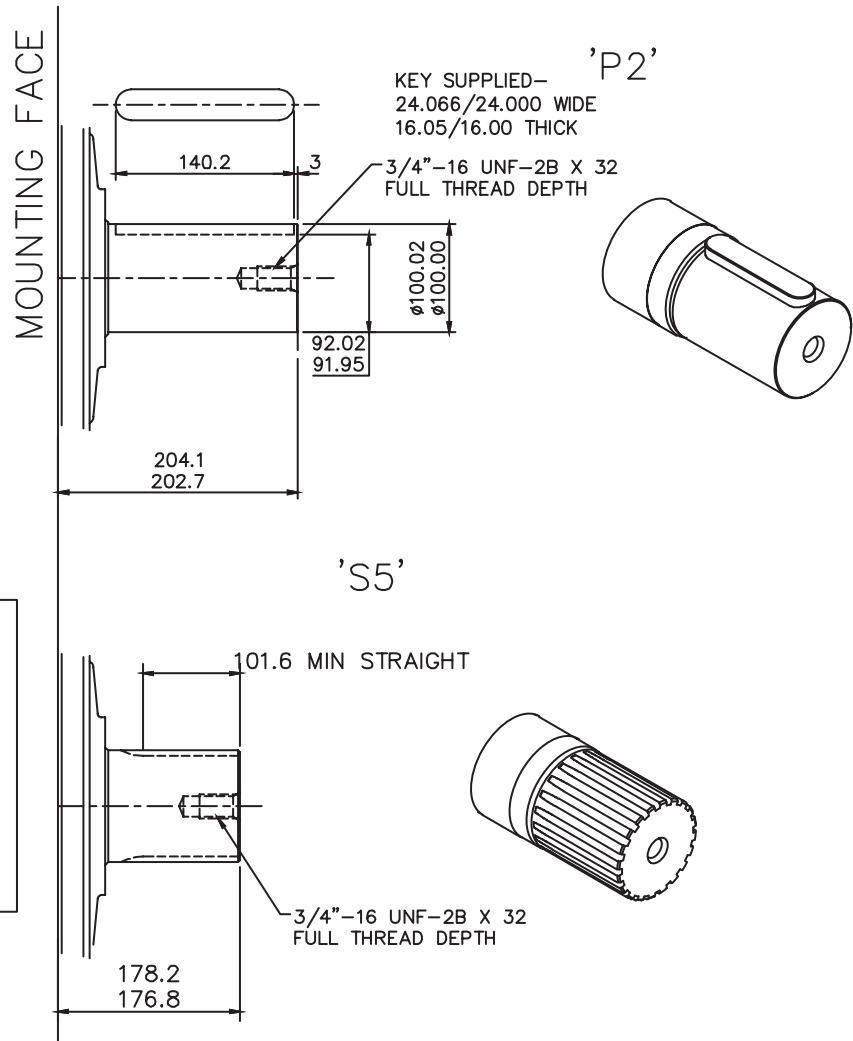


SPLINE DATA

'S3'	
TO BS 3550 (ANSI B92.1, CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	23
PITCH	6/12
MAJOR DIAMETER	100.653/100.526
FORM DIAMETER	92.939
MINOR DIAMETER	92.184/91.625
PIN DIAMETER	8.128
DIAMETER OVER PINS	109.573/109.517

### 3-7 HM(HD)B270 (cont)



#### ◆ HMHDB270 - 'Z' Shaft

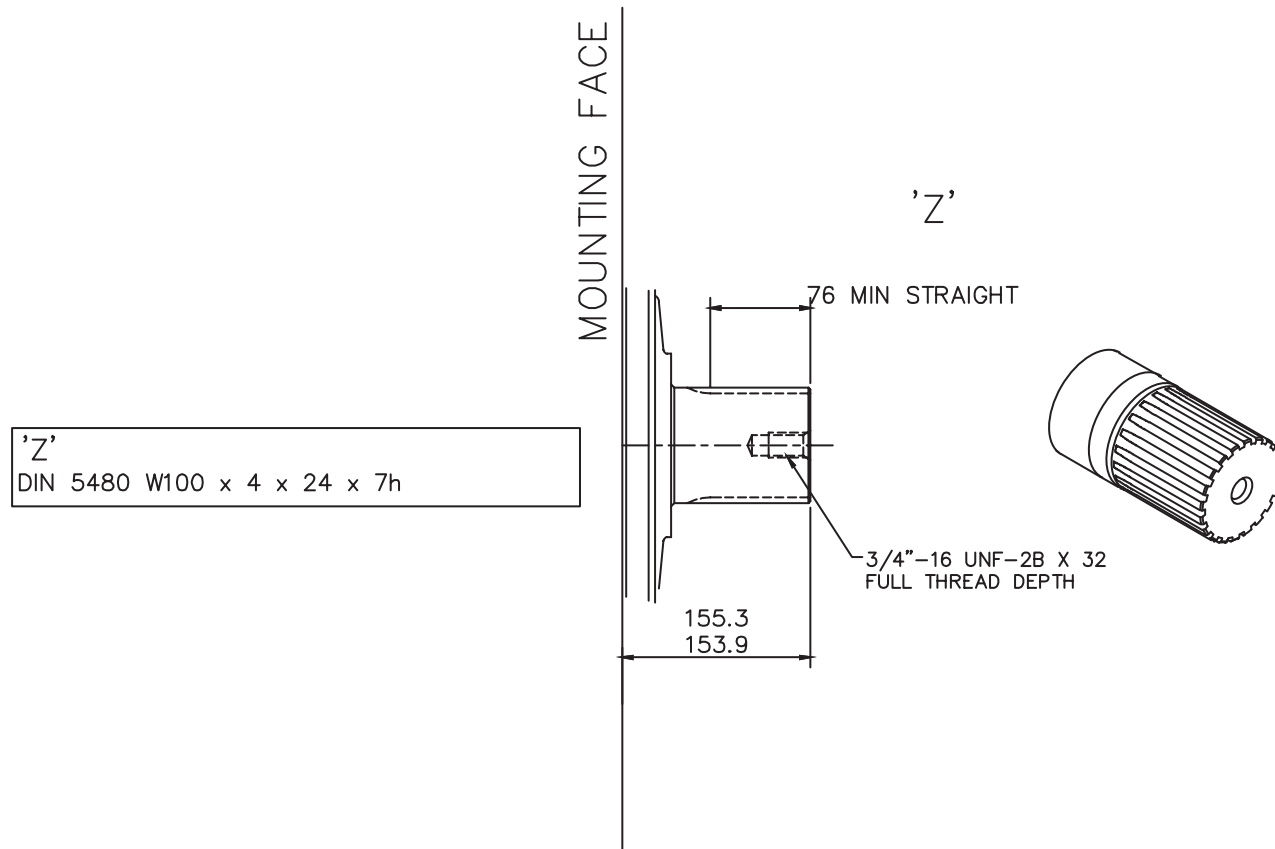




# 3-7 HM(HD)B270 (cont)

## Installation

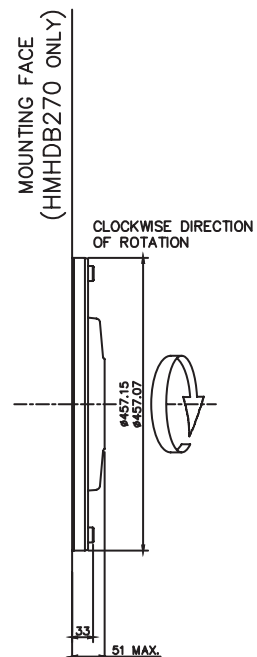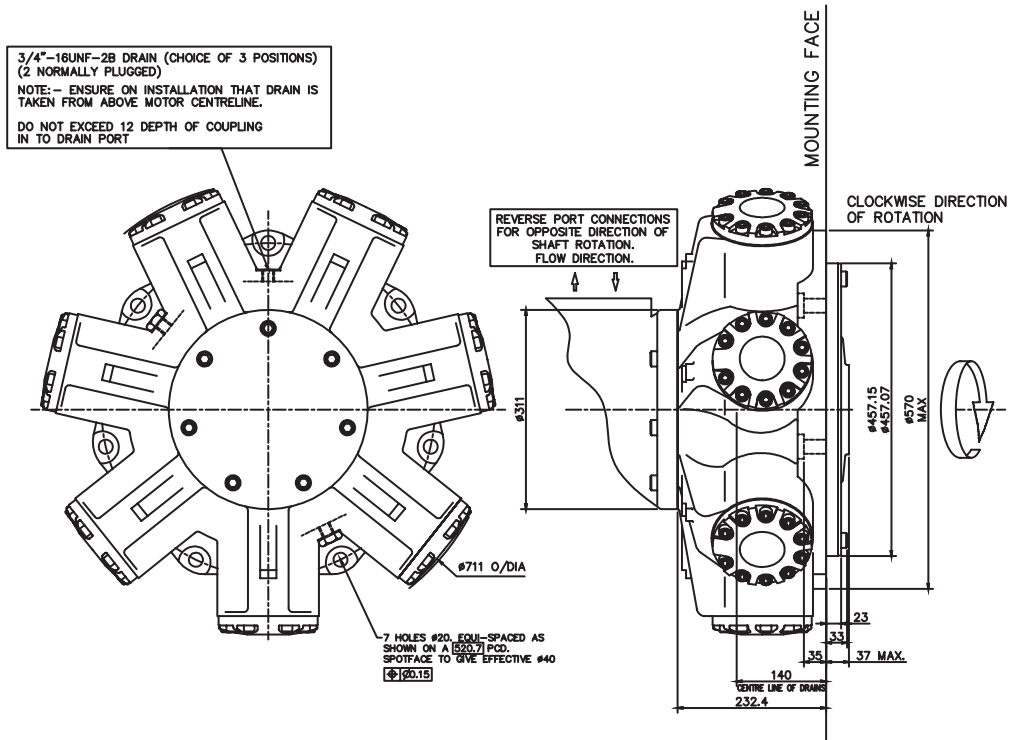

# 3-8 HM(HD)B325

## HMB325 - 'P1', 'S3' & 'Z' Shafts

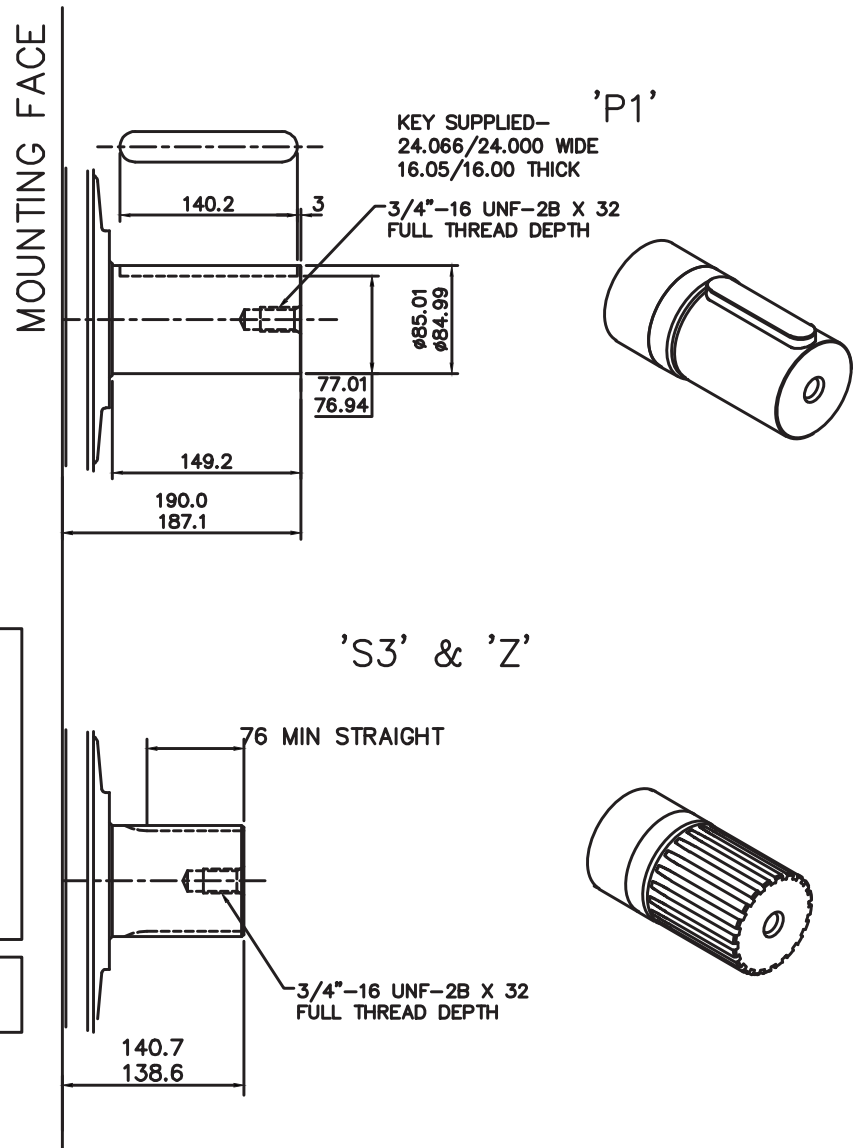



**SPLINE DATA**

<b>'S3'</b>	
TO BS 3550 (ANSI B92.1, CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	20
PITCH	6/12
MAJOR DIAMETER	87.953/87.825
FORM DIAMETER	80.264
MINOR DIAMETER	79.485/78.925
PIN DIAMETER	8.128
DIAMETER OVER PINS	97.084/97.030


<b>'Z'</b>	
DIN 5480 W100 x 4 x 24 x 7h	

3-8 HM(HD)B325 (cont)

HMB325 - 'T' & 'Q' Shaft

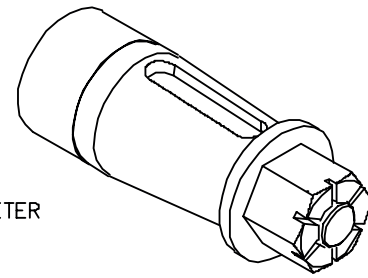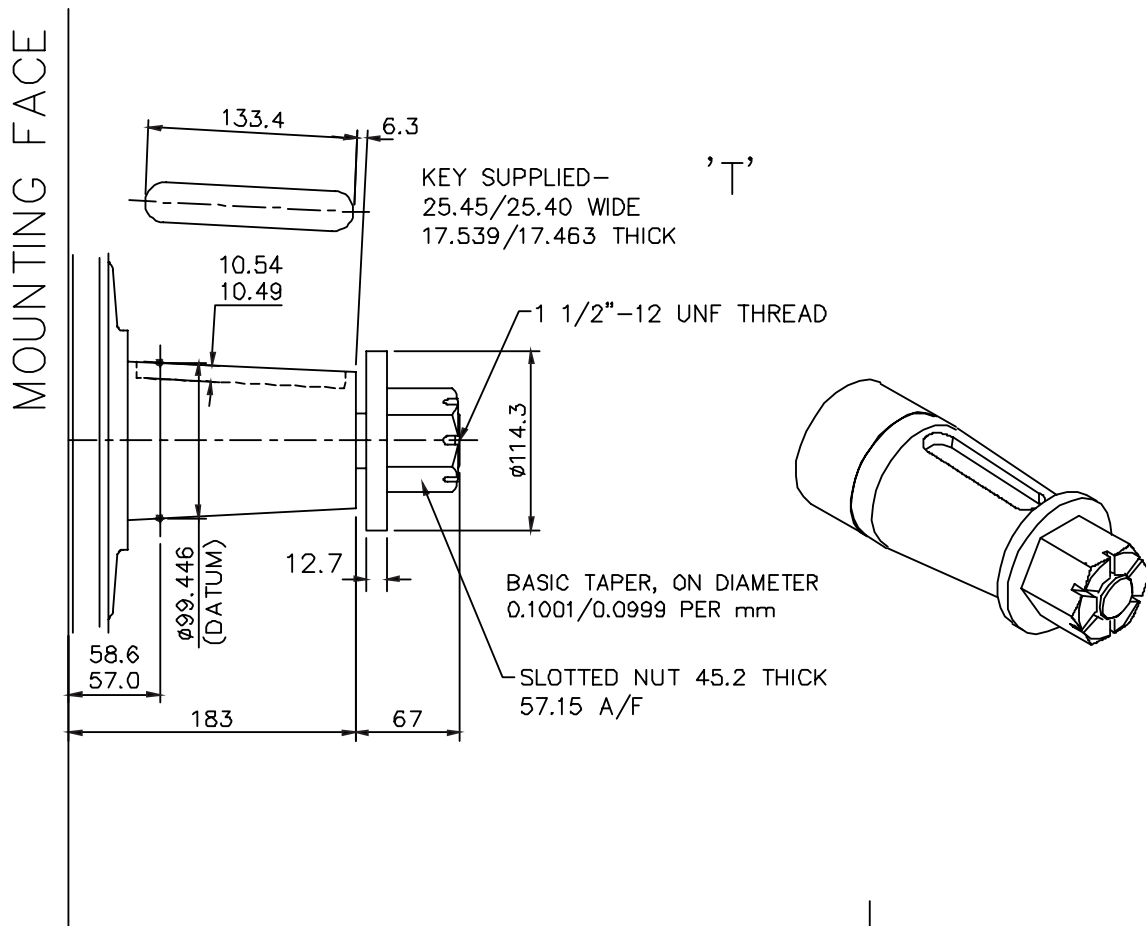


SPLINE DATA	
BS3550 : FLAT ROOT SIDE FIT	
NUMBER OF TEETH	34
PITCH	12/24
MAJOR DIAMETER	74.41/74.08
MINOR DIAMETER	69.98/69.85
PIN DIAMETER	3.66 flatted to 3.56
DIMENSION BETWEEN PINS	66.81/66.74

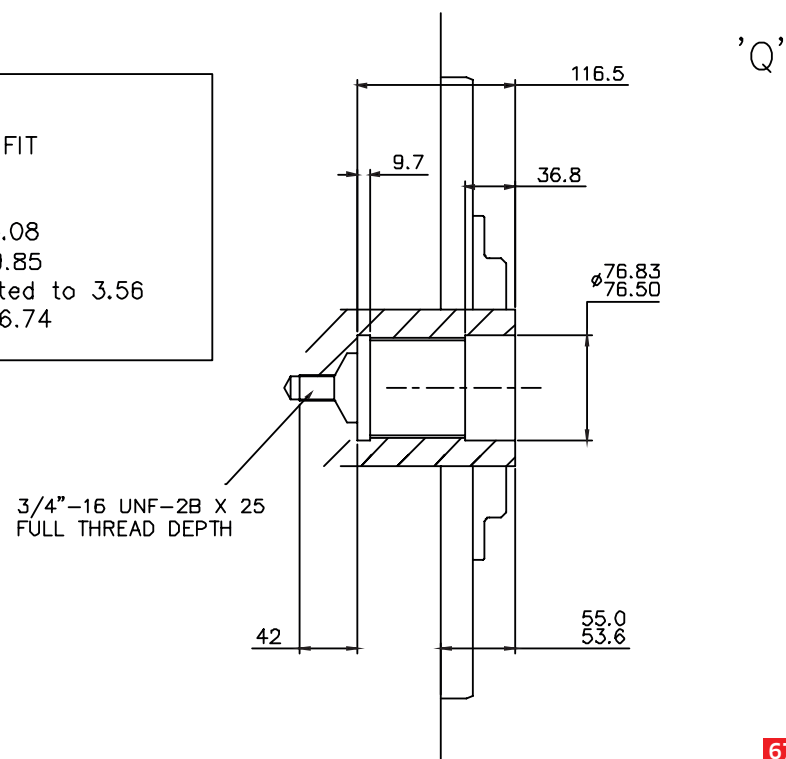

3-8 HM(HD)B325 (cont)

◆ HMHDB325 - 'P2' & 'S5' Shafts

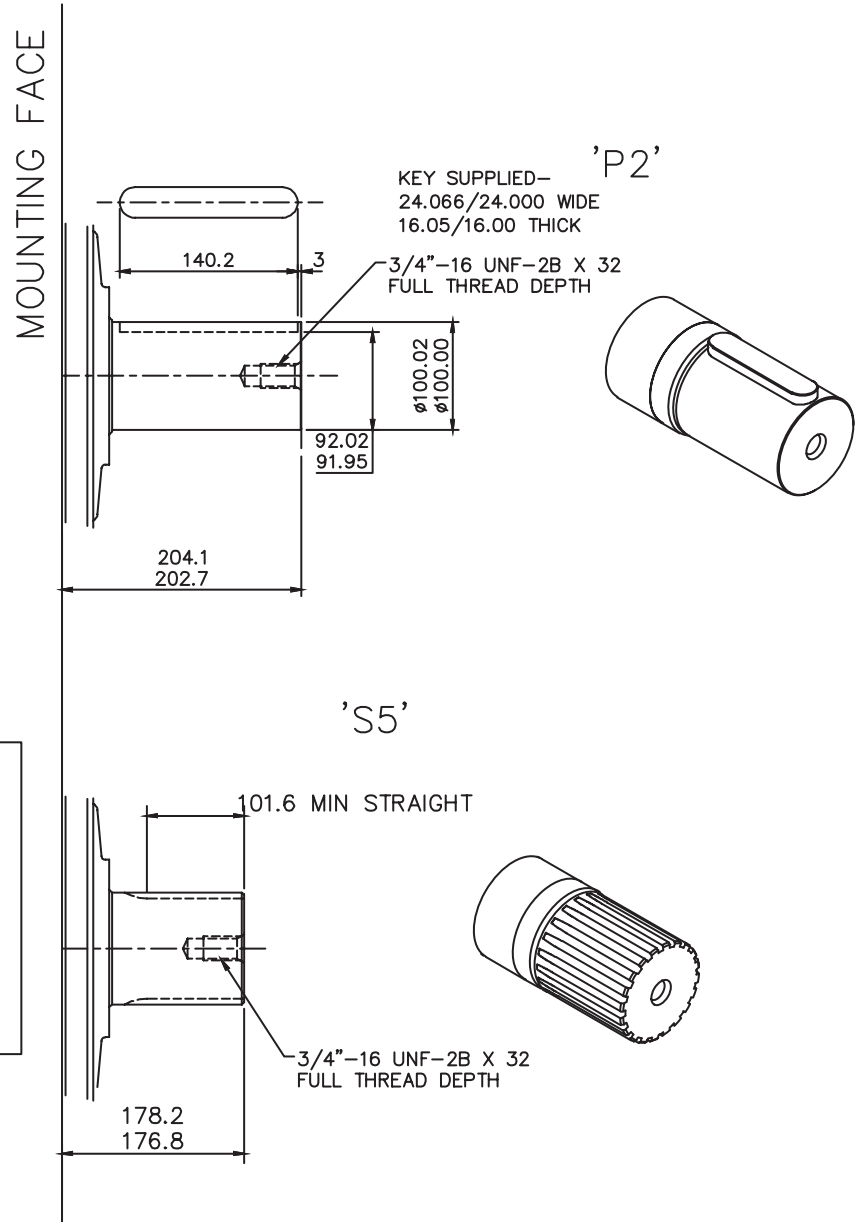


SPLINE DATA

'S3'	
TO BS 3550 (ANSI B92.1, CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	23
PITCH	6/12
MAJOR DIAMETER	100.653/100.526
FORM DIAMETER	92.939
MINOR DIAMETER	92.184/91.625
PIN DIAMETER	8.128
DIAMETER OVER PINS	109.573/109.517


### 3-8 HM(HD)B325 (cont)

#### ◆ HMHDB325 - 'Z' Shaft

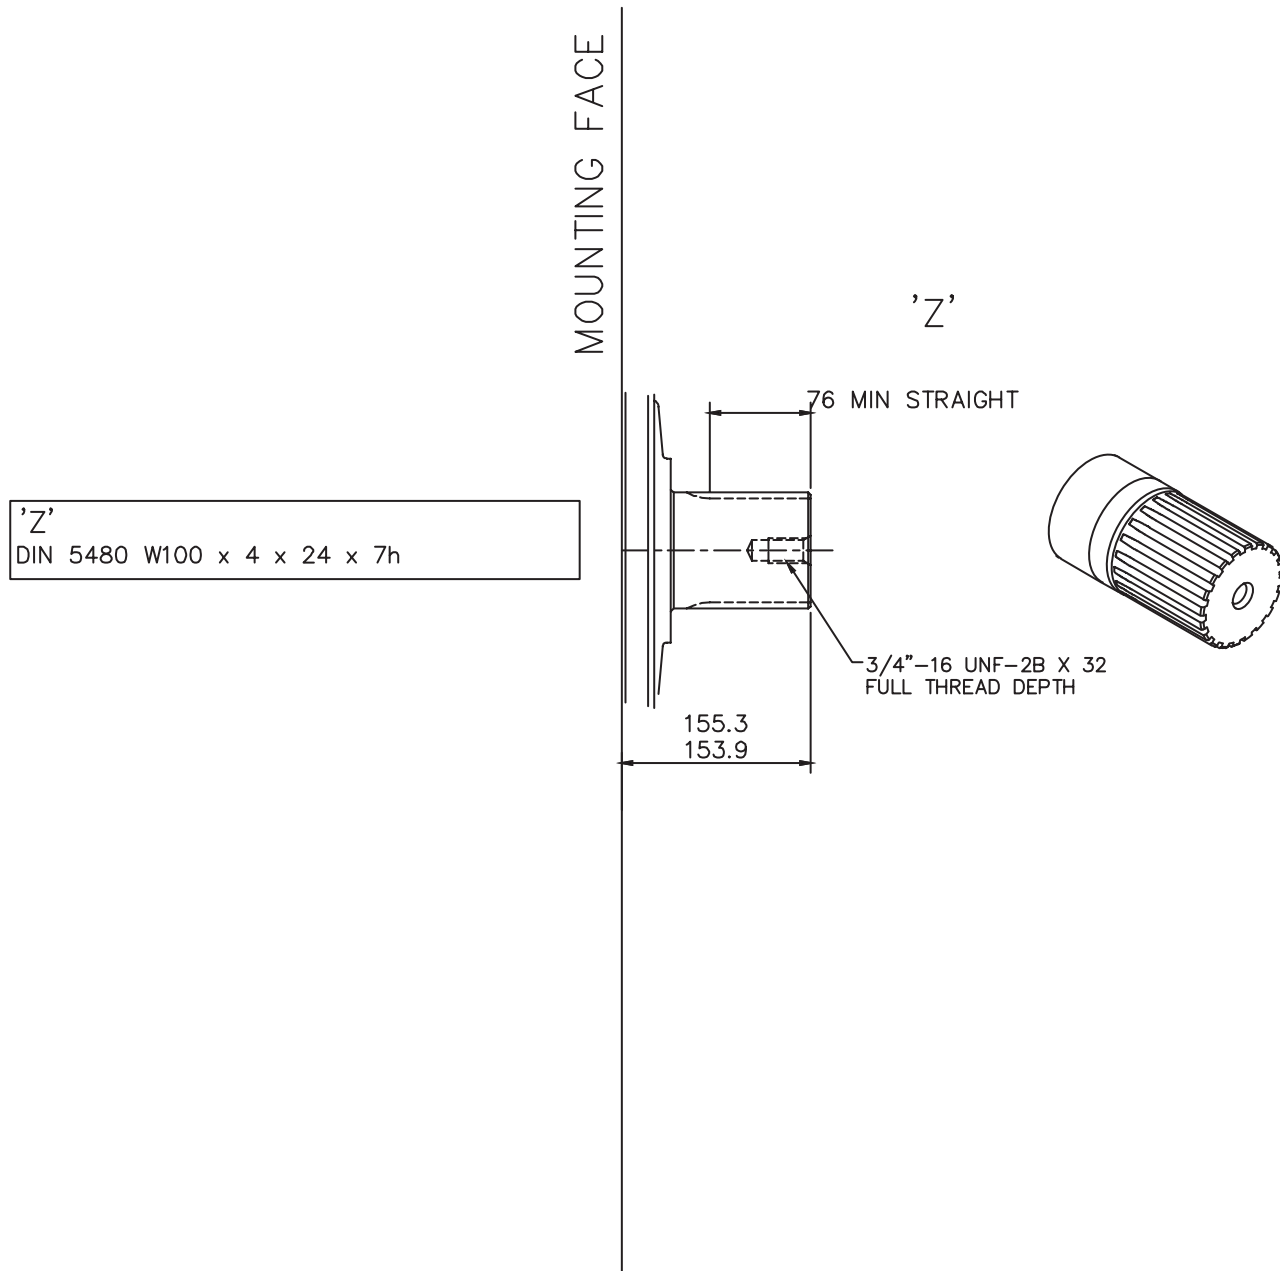


# 3-8 HM(HD)B325 (cont)

## Installation

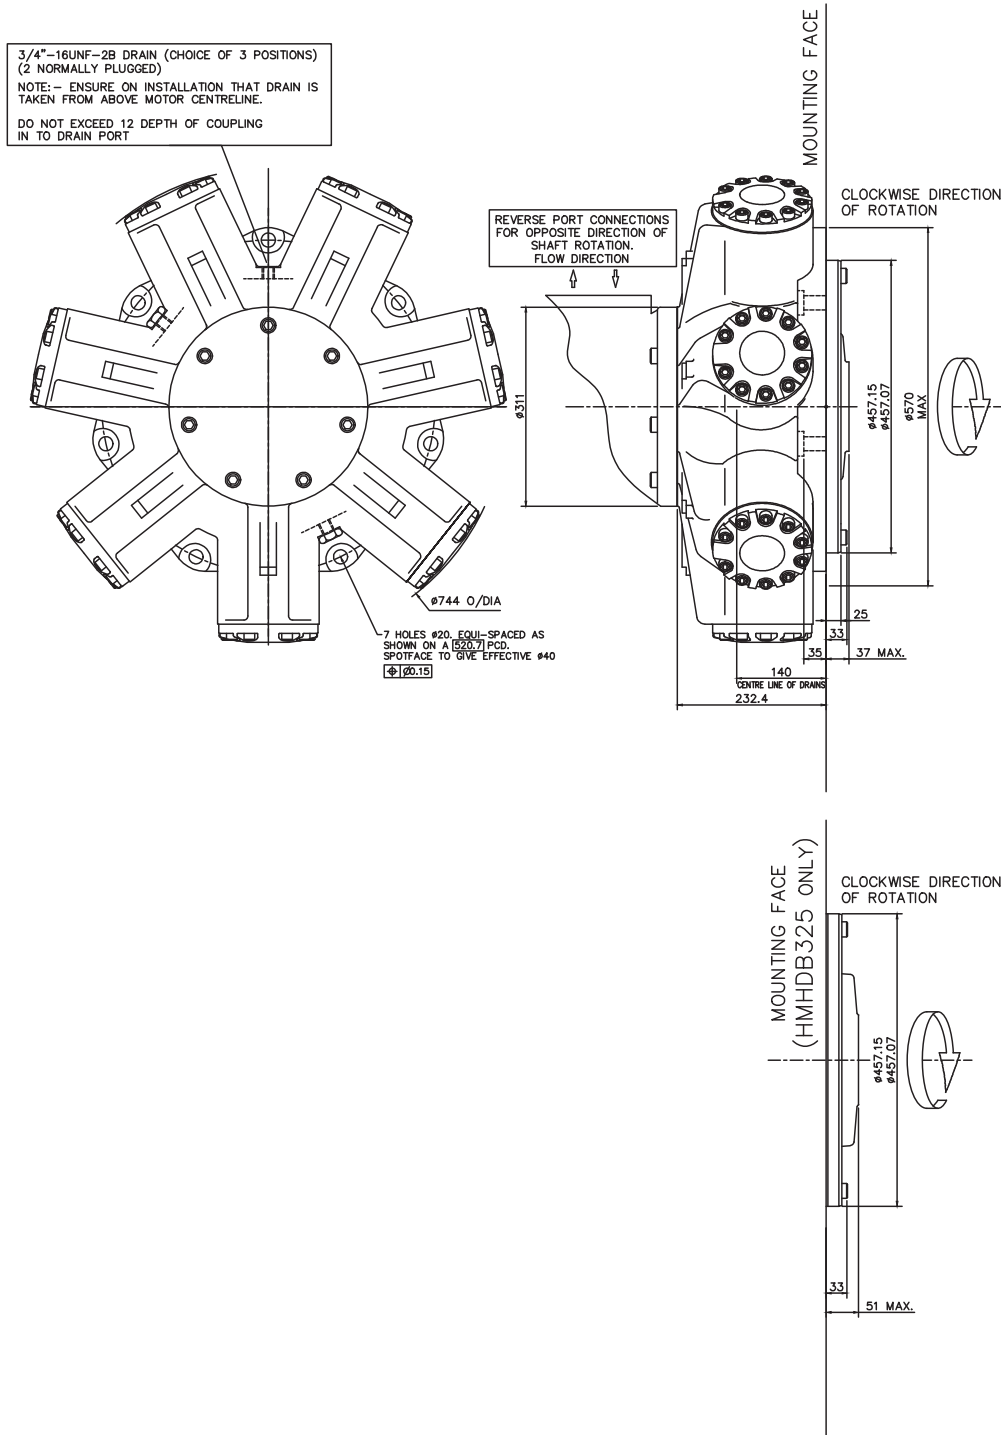

# 3-9 HMHDB400

## ◆ 'P', 'S' & 'Z' Shafts

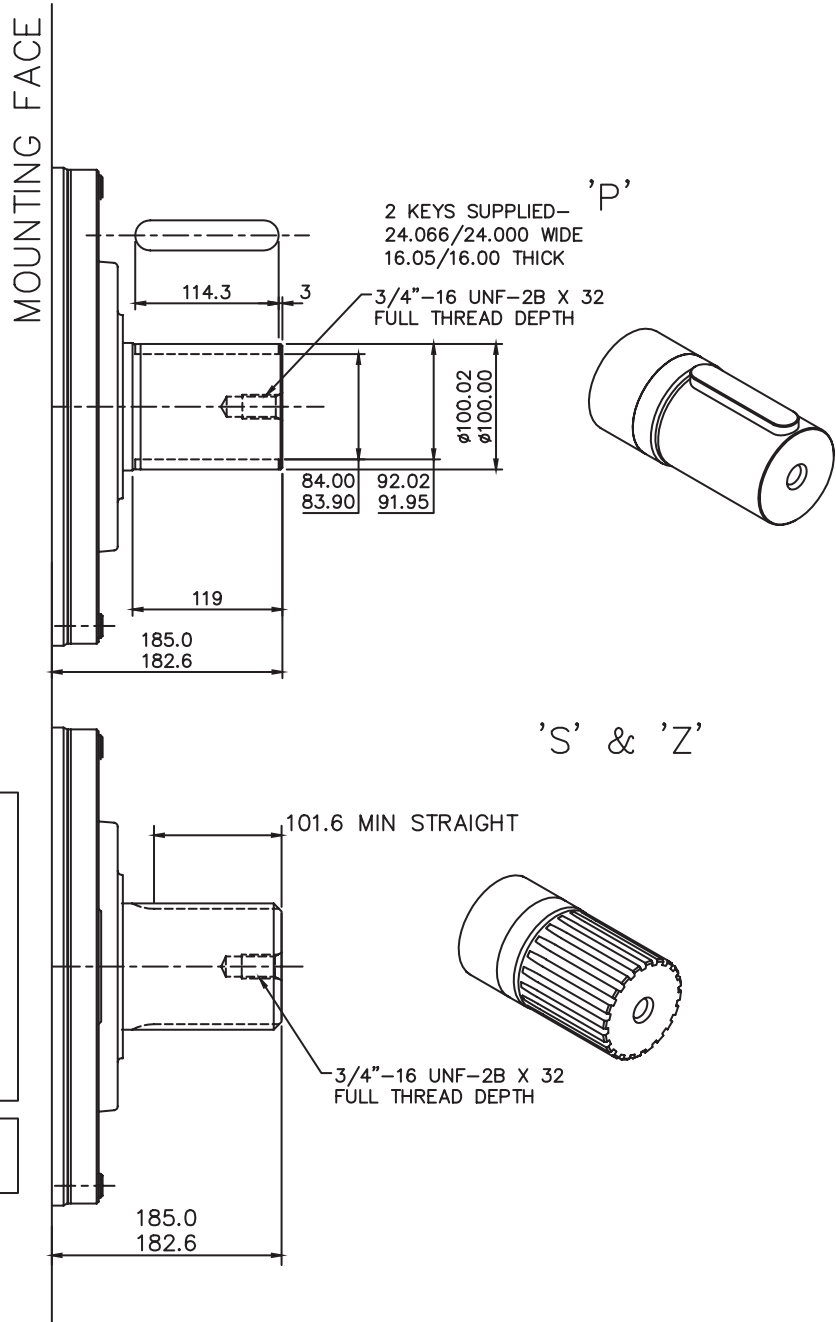


**SPLINE DATA**

<b>'S'</b>	
TO BS 3550 (ANSI B92.1, CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	23
PITCH	6/12
MAJOR DIAMETER	100.653/100.526
FORM DIAMETER	92.939
MINOR DIAMETER	92.184/91.625
PIN DIAMETER	8.128
DIAMETER OVER PINS	109.573/109.517
<b>'Z'</b>	
DIN 5480 W100 x 4 x 24 x 7h	

# 3-9 HMHDB400 (cont)


## Installation

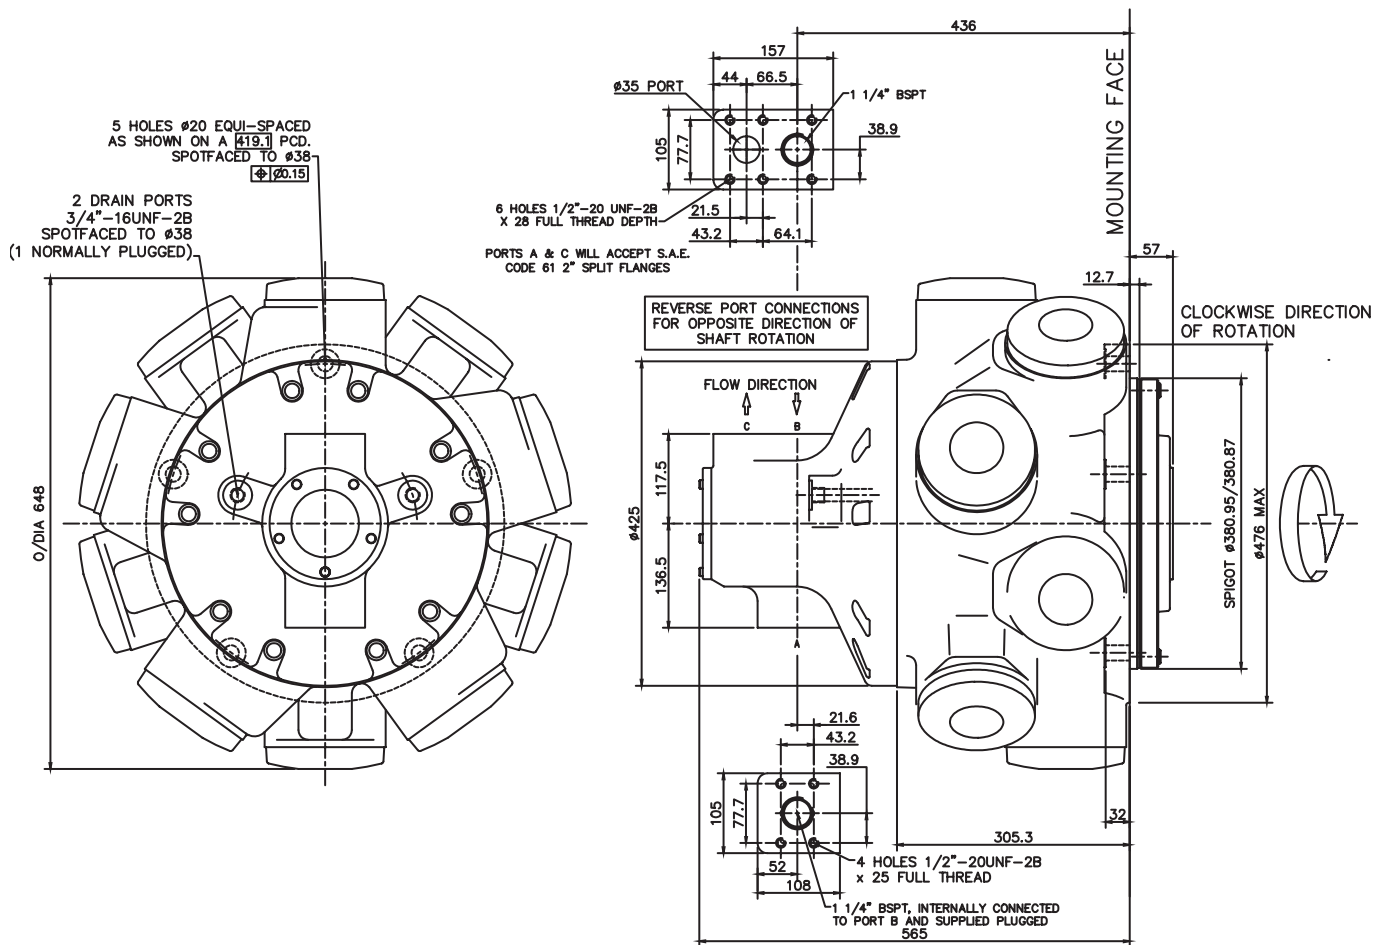



3-10 HMB500

◆ 'P', 'S' & 'Z' Shafts

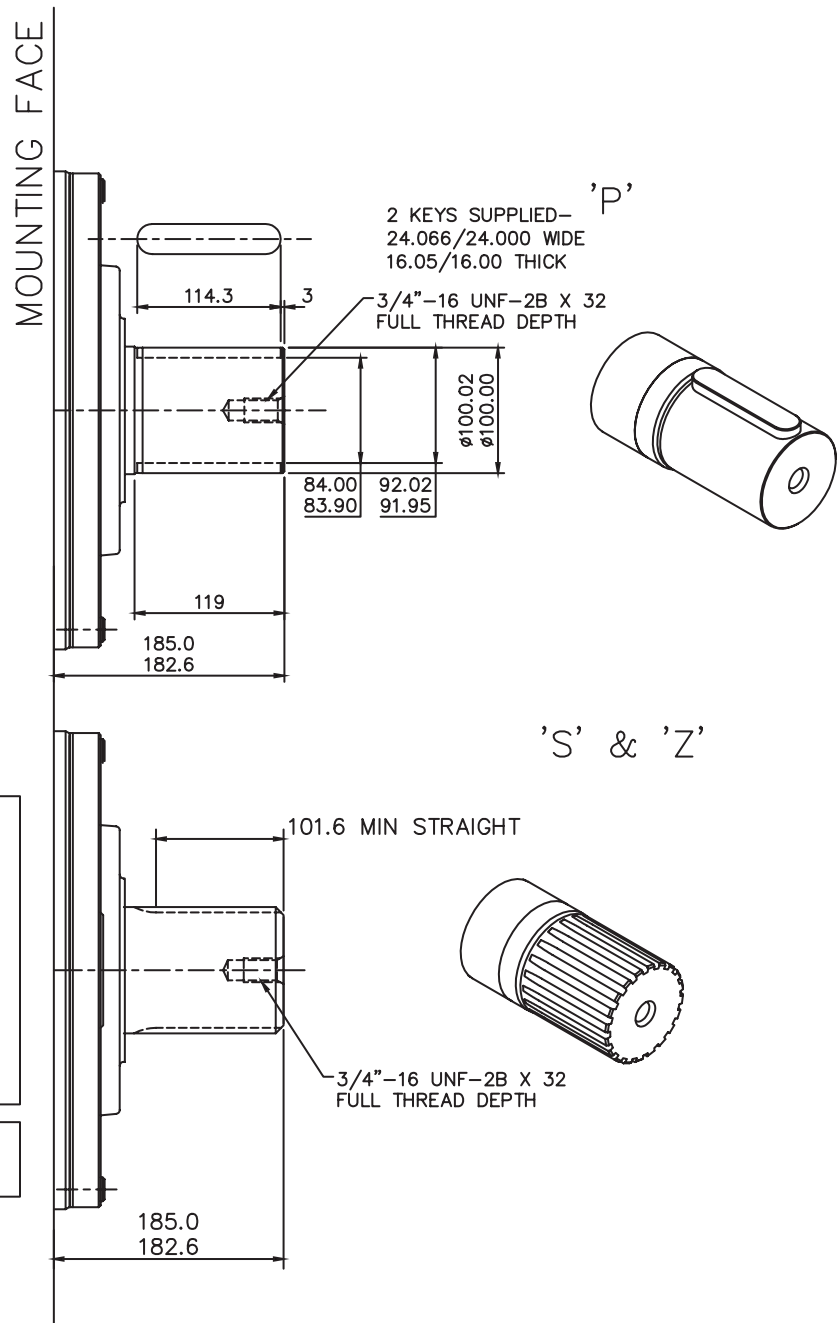


SPLINE DATA

<b>'S'</b>	
TO BS 3550 (ANSI B92.1, CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE	30°
NUMBER OF TEETH	23
PITCH	6/12
MAJOR DIAMETER	100.653/100.526
FORM DIAMETER	92.939
MINOR DIAMETER	92.184/91.625
PIN DIAMETER	8.128
DIAMETER OVER PINS	109.573/109.517

<b>'Z'</b>	
DIN 5480 W100 x 4 x 24 x 7h	

# 3-10 HMB500 (cont)

## Installation

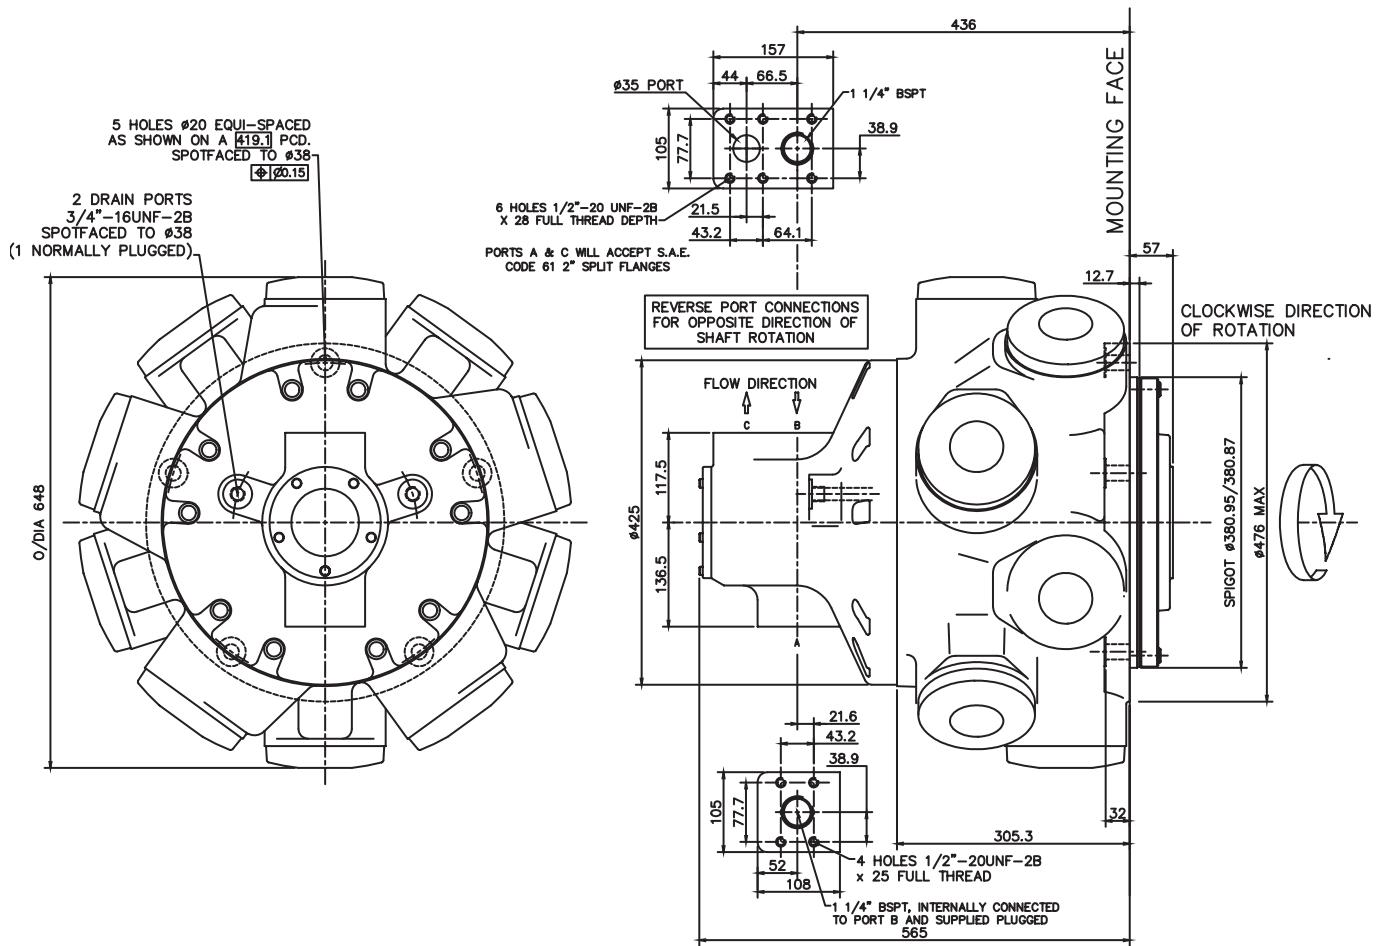

## 3-11 Preferred Hydraulic Connections



### ◆ SAE Connections

MODEL	'SF3/SFM3' 1 ¼" Code 61 SAE Ports								
	ØS	V	T	R	W	X(SF3)	X(SFM3)	P	Q
HMB030	32	76.0	30.2	58.7	87.1	7/16"-14 UNC-2B x 27 FULL THREAD DEPTH	M12 x 1.75 x 27 FULL THREAD DEPTH	271	331
HMB045								300	360
HMB060/080/100								286	346
HMB125								328	388
HMB150/200									



MODEL	'SF4/SFM4' 1 ½" Code 62 SAE Ports								
	ØS	V	T	R	W	X(SF4)	X(SFM4)	P	Q
HMB030	38.1	116	36.5	79.4	154	5/8"-11 UNC-2B x 35 FULL THREAD DEPTH	M16 x 2.0 x 35 FULL THREAD DEPTH	301	384
HMB045								330	413
HMB060/080/100								316	399
HMB125								358	441
HMB150/200									

\*other porting options available upon request

## SFM3/SF3

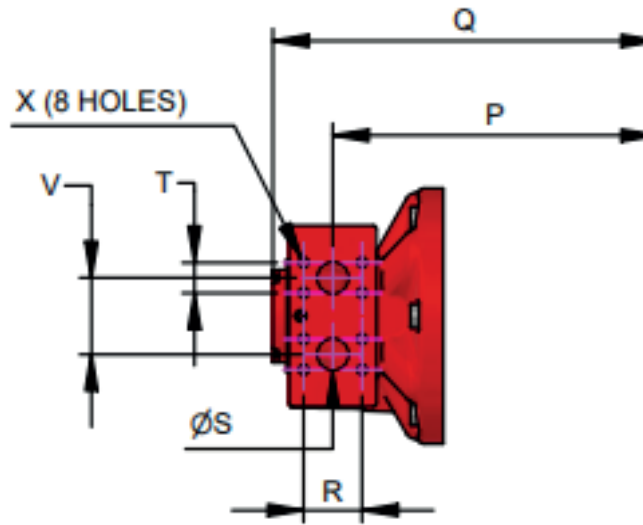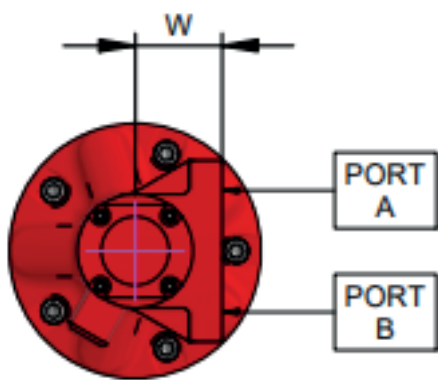

## SFM4/SF4

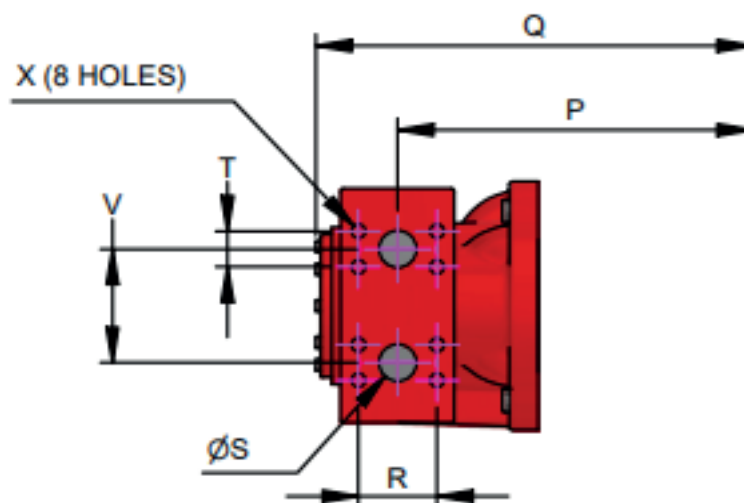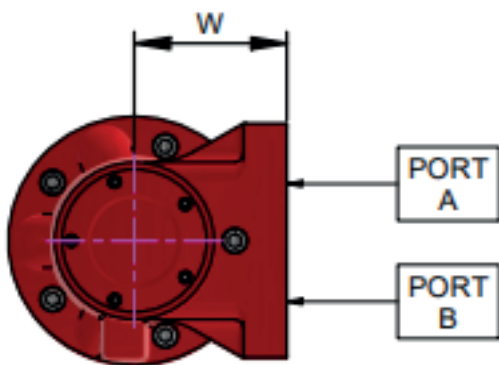

MOUNTING FACE


## 3-11 Preferred Hydraulic Connections (cont)

### ◆ SAE Connections - HMHDB400/500

MODEL	'SFM45' 2" Code 62 SAE Ports							
	ØA	B	C	D	E	F	G	H
HM(HD)B400/500	50	120	44.5	96.8	145	M20 x 2.5 x 38 FULL THREAD DEPTH	478	567

\*other porting options available upon request

# SFM45

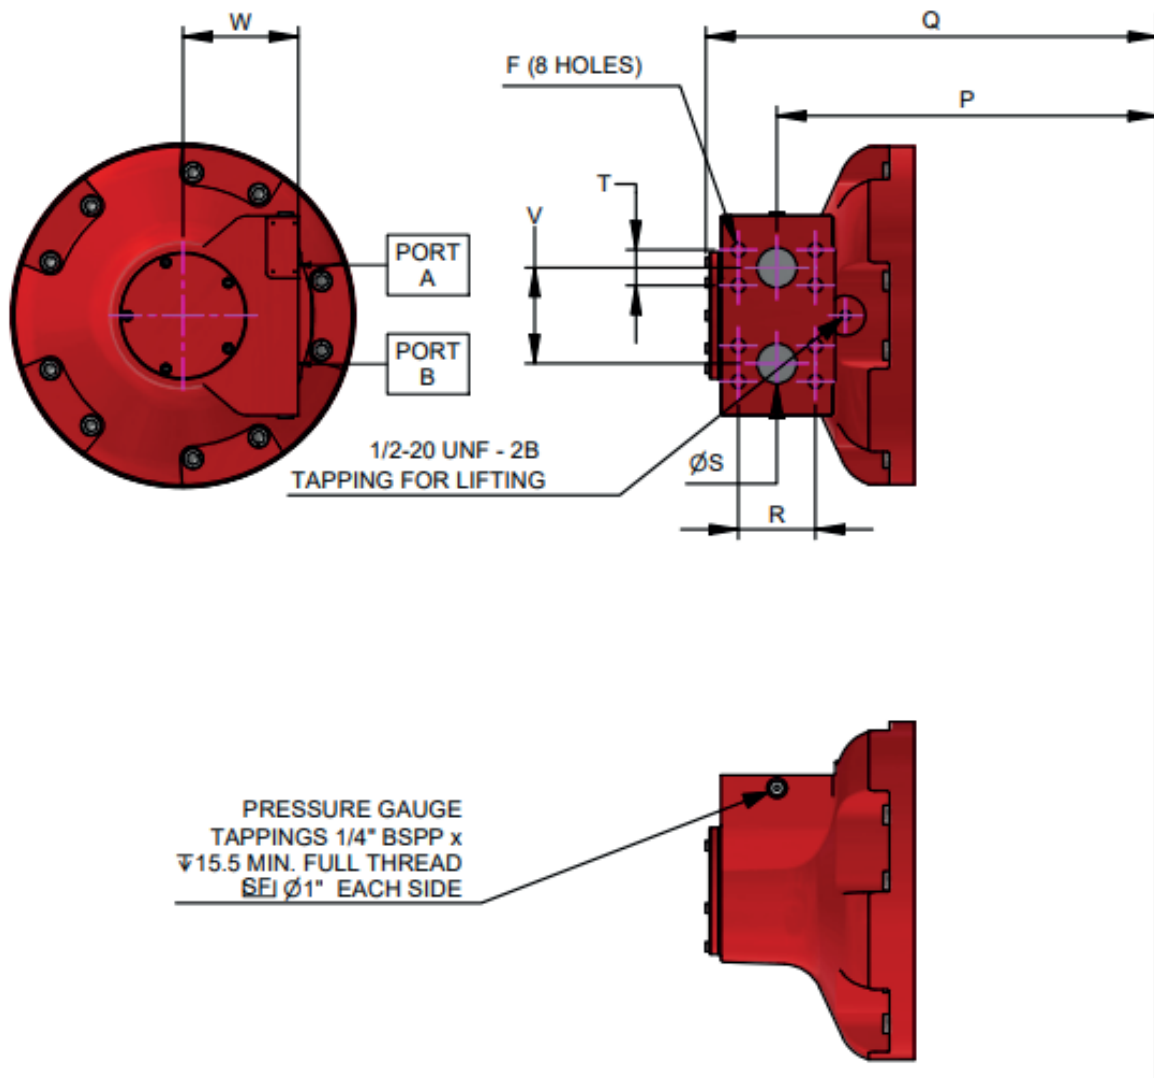

## 3-11 Preferred Hydraulic Connections (cont)




### ◆ Manifold connections

MODEL	'SM3' 1 ¼" Ports for Bolt-On Manifold									
	ØS	V	T	R	W	P	Q	X1	X2	X3
HMB030	32	76	143	62.0	87.1	270.5	332	14	20	30
HMB045						300	360			
HMB060/080/100						286	346			
HMB125						315	375			
HMB150/200						358	440			
HMB270/325						385	459			

MODEL	'SM4' 1 ½" Ports for Bolt-On Manifold									
	ØS	V	T	R	W	P	Q	X1	X3	X2
HMB030	38.0	116	194	68.0	154	301	383	17	25	28
HMB045						331	413			
HMB060/080/100						316	399			
HMB125						345	428			
HMB150/200						358	441			
HMB270/325					185	377	459			




\*other porting options available upon request

# SM3

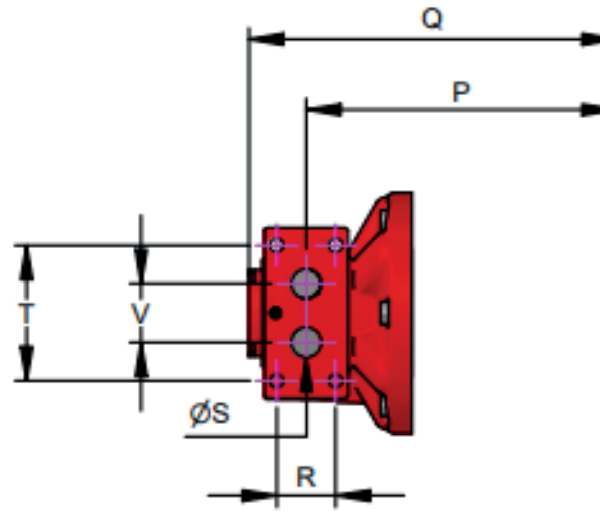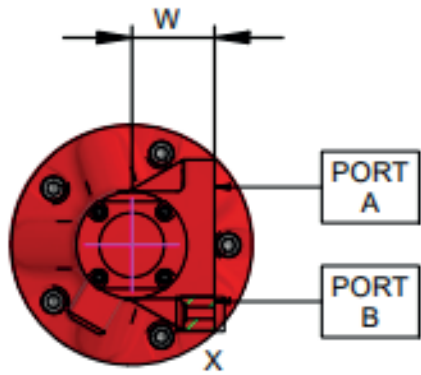

MOUNTING FACE

# SM4

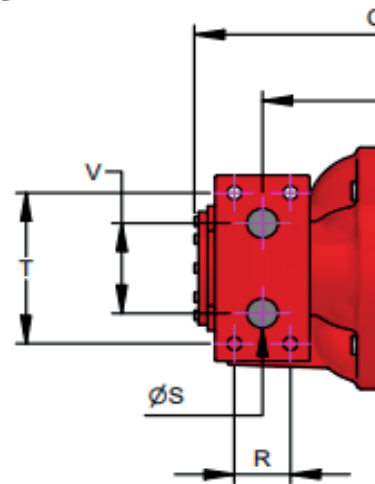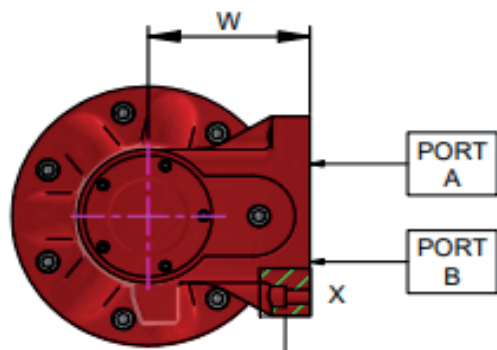



**KAWASAKI PRECISION  
MACHINERY (UK) LTD**

Ernesettle, Plymouth  
Devon, PL5 2SA, England

Tel: +44 1752 364394  
Fax: +44 1752 364816  
Mail: info@kpm-uk.co.uk  
Website: www.kpm-eu.com

OTHER GLOBAL SALES OFFICES

**JAPAN**

Kawasaki Heavy Industry Ltd, Precision Machinery Ltd. Tokyo Office World  
Trade Center Bidg.  
4-1 Hamamatsu-cho  
2-chome, Minato-ku  
Tokyo 105-6116  
Japan  
Tel: +81-3-3435-6862  
Website: www.khi.co.jp/kpm

**U.S.A**

Kawasaki Precision Machinery (U.S.A.), Inc.  
3838 Broadmoor Avenue S.E.  
Grand Rapids  
Michigan 49512  
U.S.A.  
Tel: +1-616-975-3101  
Website: www.kpm-usa.com

**CHINA**

Kawasaki Precision Machinery Trading (Shanghai) Co., Ltd. 17th Floor (Room  
1701), The Headquarters Building No168 XiZang Road (M)  
Huangpu District  
Shanghai 200001  
China  
Tel: +86-021-3366-3800

**KOREA**

Flutek, Ltd.  
192-11, Shinchon-dong  
Changwon  
Kyungnam 641-370  
Korea  
Tel: +82-55-286-5551  
Website: www.flutek.co.kr

**The specified data is for product description purposes only  
and may not be deemed to be guaranteed unless expressly  
confirmed in the contract.**

Data sheet:M200112.24-HMB

**Conversion Table**

Pressure	
bar	PSI
1	14.5
Flow	
l/min	gal/min
1	0.264 US
1	0.219 UK
Length	
mm	inch
25.4	1
Torque	
Nm	lbf ft
1	1.737
Power	
kW	hp
1	1.341
Mass	
kg	lb
1	2.2